



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®2006 = 24.1**

## IBM System x3650 (Intel Xeon E5430)

**SPECint\_base2006 = 20.9**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

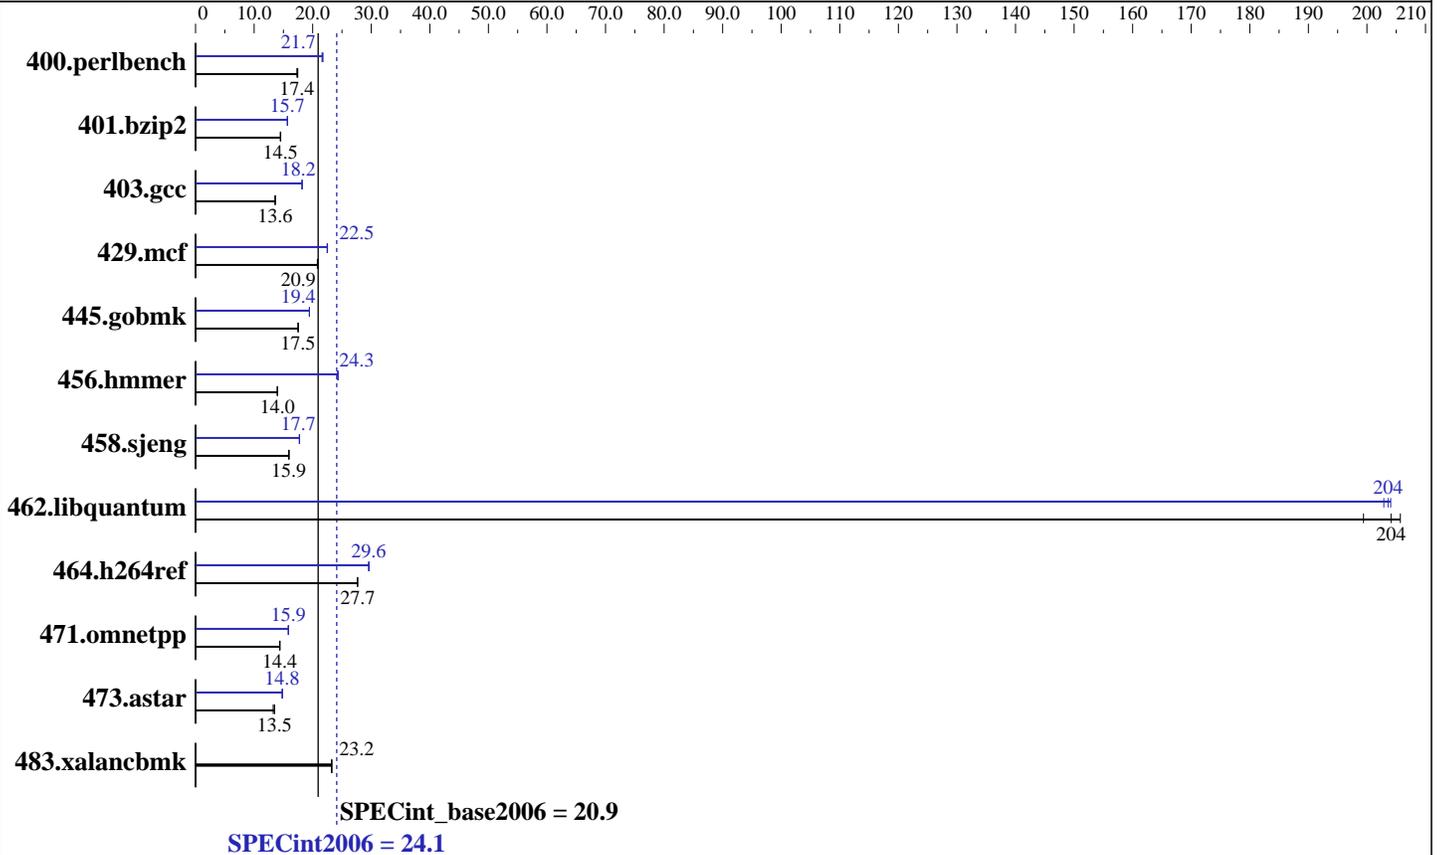

### Hardware

CPU Name: Intel Xeon E5430  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
 Disk Subsystem: 1 x 36 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64), Kernel 2.6.16.21-0.8-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Multi-user, run level 3  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: MicroQuill SmartHeap 8.1 Binutils 2.17.50.0.15



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 24.1

IBM System x3650 (Intel Xeon E5430)

SPECint\_base2006 = 20.9

CPU2006 license: 11

Test date: Dec-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
400.perlbench	560	17.4	564	17.3	<u>563</u>	<u>17.4</u>	450	21.7	<u>450</u>	<u>21.7</u>	452	21.6
401.bzip2	664	14.5	667	14.5	<u>666</u>	<u>14.5</u>	<u>615</u>	<u>15.7</u>	615	15.7	616	15.7
403.gcc	592	13.6	592	13.6	<u>592</u>	<u>13.6</u>	443	18.2	<u>442</u>	<u>18.2</u>	442	18.2
429.mcf	437	20.9	439	20.8	<u>437</u>	<u>20.9</u>	406	22.5	405	22.5	<u>405</u>	<u>22.5</u>
445.gobmk	599	17.5	<u>599</u>	<u>17.5</u>	599	17.5	540	19.4	<u>540</u>	<u>19.4</u>	540	19.4
456.hmmmer	<u>668</u>	<u>14.0</u>	668	14.0	668	14.0	384	24.3	384	24.3	<u>384</u>	<u>24.3</u>
458.sjeng	758	16.0	<u>759</u>	<u>15.9</u>	760	15.9	<u>683</u>	<u>17.7</u>	683	17.7	681	17.8
462.libquantum	104	199	<u>102</u>	<u>204</u>	101	206	102	203	102	204	<u>102</u>	<u>204</u>
464.h264ref	802	27.6	<u>799</u>	<u>27.7</u>	799	27.7	748	29.6	747	29.6	<u>748</u>	<u>29.6</u>
471.omnetpp	434	14.4	435	14.4	<u>434</u>	<u>14.4</u>	394	15.9	395	15.8	<u>394</u>	<u>15.9</u>
473.astar	521	13.5	530	13.3	<u>522</u>	<u>13.5</u>	<u>474</u>	<u>14.8</u>	473	14.8	475	14.8
483.xalancbmk	297	23.3	297	23.2	<u>297</u>	<u>23.2</u>	297	23.3	297	23.2	<u>297</u>	<u>23.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmmer, for peak, are compiled in 64-bit mode  
Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Enabled  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to null  
Powersaved dameon was disabled in OS

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	24.1
-----------------	---------------	------

IBM System x3650 (Intel Xeon E5430)	SPECint_base2006 =	20.9
-------------------------------------	--------------------	------

CPU2006 license: 11	Test date:	Dec-2007
Test sponsor: IBM Corporation	Hardware Availability:	Jan-2008
Tested by: IBM Corporation	Software Availability:	Nov-2007

## Base Optimization Flags

C benchmarks:  
 -fast -vec-guard-write -parallel -par-runtime-control

C++ benchmarks:  
 -xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
 -L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

## Base Other Flags

C benchmarks:  
 403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
 icc

401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
 -L/opt/intel/cce/10.1.008/lib  
 -I/opt/intel/cce/10.1.008/include

456.hmmer: /opt/intel/cce/10.1.008/bin/icc  
 -L/opt/intel/cce/10.1.008/lib  
 -I/opt/intel/cce/10.1.008/include

C++ benchmarks:  
 icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 24.1

IBM System x3650 (Intel Xeon E5430)

SPECint\_base2006 = 20.9

CPU2006 license: 11

Test date: Dec-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmr: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive  
-auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs  
-L/spec/users/rahul/cpu2006.1.0/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint2006 =	24.1
-----------------	---------------	------

IBM System x3650 (Intel Xeon E5430)	SPECint_base2006 =	20.9
-------------------------------------	--------------------	------

<b>CPU2006 license:</b> 11	<b>Test date:</b> Dec-2007
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b> Jan-2008
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b> Nov-2007

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.14.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.14.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
 For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
 Report generated on Tue Jul 22 16:18:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
 Originally published on 6 February 2008.