



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 45.3

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3


Test date: Jan-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

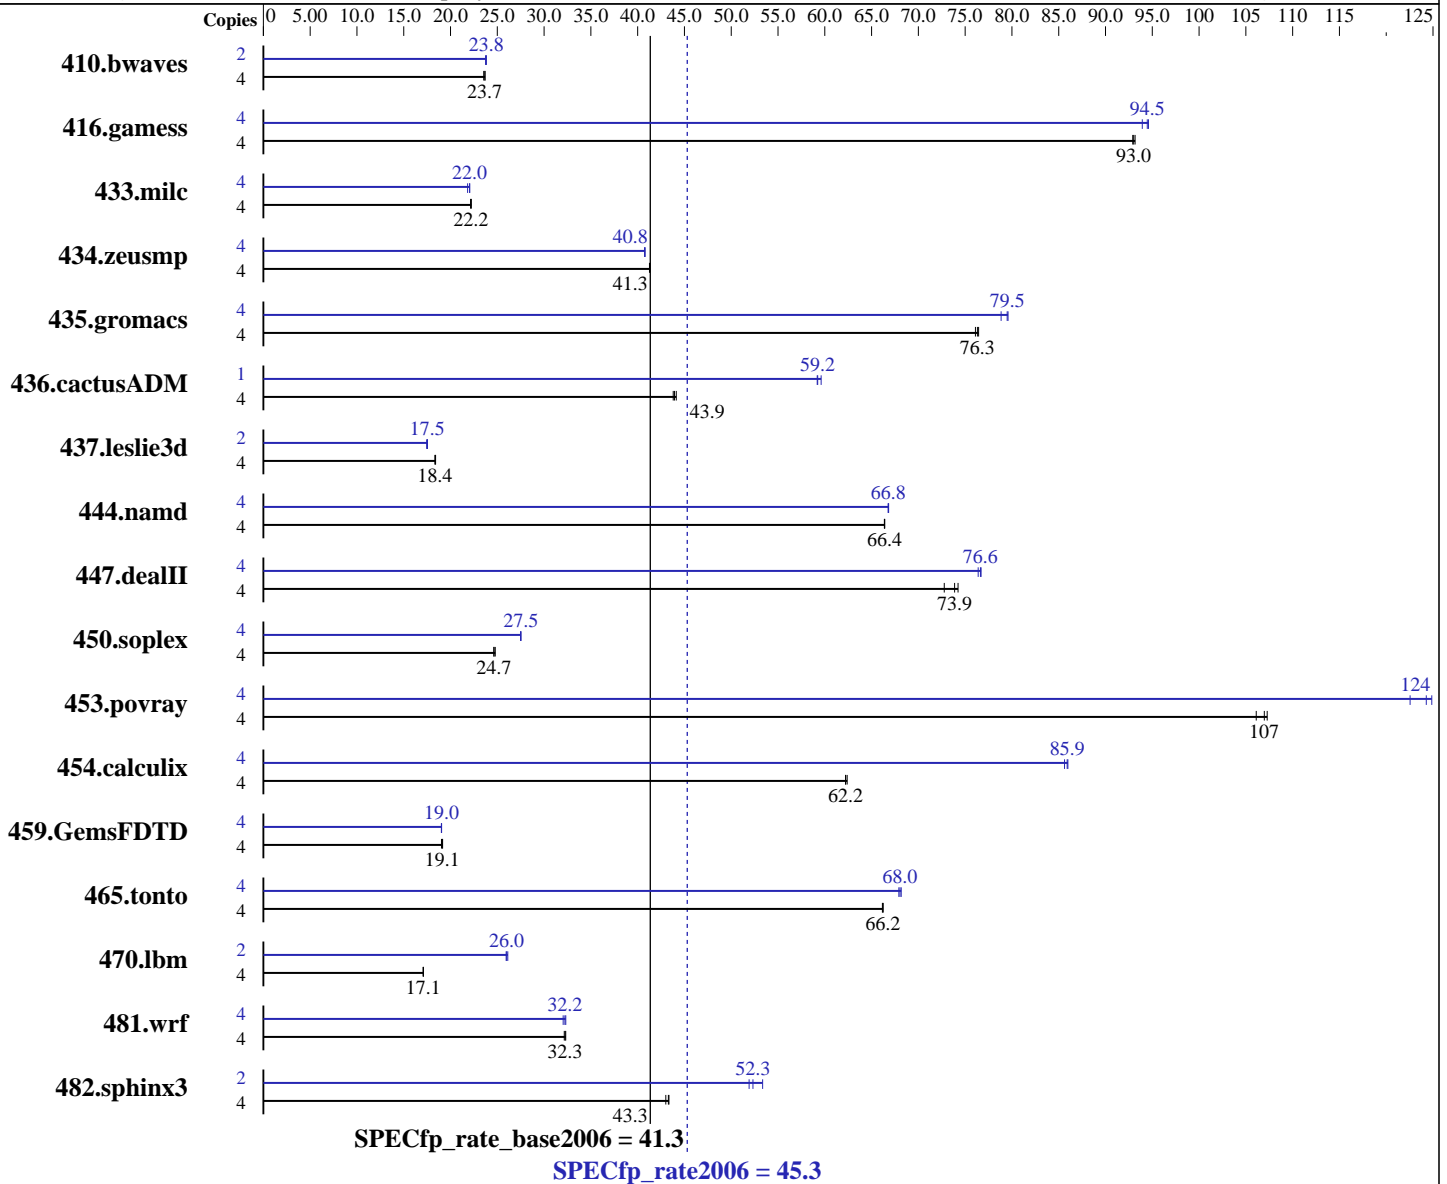

Hardware

CPU Name: Intel Xeon X5460
 CPU Characteristics: 3.16 GHz, 2x6 MB L2 shared, 1333 MHz system bus
 CPU MHz: 3166
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for applications running on IA-32 and Intel 64, Version 10.1 Build 20070913 Package ID: 1_cc_p_10.1.008 Intel Fortran Compiler for applications running on IA-32 and Intel 64, Version 10.1 Build 20070913 Package ID: 1_cc_p_10.1.008
 Auto Parallel: Yes
 File System: ext2

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.3

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (8x2 GB PC2-5300F CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

System State: Multi-user run level 3
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: binutils-2.17.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2295	23.7	<u>2297</u>	<u>23.7</u>	2308	23.5	2	<u>1141</u>	<u>23.8</u>	1144	23.7	1141	23.8
416.gamess	4	<u>842</u>	<u>93.0</u>	843	92.9	841	93.2	4	<u>829</u>	<u>94.5</u>	834	93.9	828	94.6
433.milc	4	1653	22.2	1658	22.1	<u>1655</u>	<u>22.2</u>	4	<u>1666</u>	<u>22.0</u>	1665	22.0	1682	21.8
434.zeusmp	4	881	41.3	882	41.3	<u>882</u>	<u>41.3</u>	4	892	40.8	<u>893</u>	<u>40.8</u>	893	40.7
435.gromacs	4	375	76.1	374	76.4	<u>374</u>	<u>76.3</u>	4	<u>359</u>	<u>79.5</u>	359	79.6	362	78.8
436.cactusADM	4	1091	43.8	1083	44.1	<u>1088</u>	<u>43.9</u>	1	202	59.2	200	59.6	<u>202</u>	<u>59.2</u>
437.leslie3d	4	2050	18.3	2043	18.4	<u>2048</u>	<u>18.4</u>	2	<u>1072</u>	<u>17.5</u>	1072	17.5	1078	17.4
444.namd	4	<u>483</u>	<u>66.4</u>	483	66.4	483	66.4	4	480	66.8	<u>480</u>	<u>66.8</u>	480	66.8
447.dealII	4	616	74.2	629	72.8	<u>619</u>	<u>73.9</u>	4	<u>597</u>	<u>76.6</u>	597	76.7	599	76.4
450.soplex	4	1355	24.6	<u>1353</u>	<u>24.7</u>	1346	24.8	4	1212	27.5	1214	27.5	<u>1212</u>	<u>27.5</u>
453.povray	4	198	107	201	106	<u>199</u>	<u>107</u>	4	174	123	170	125	<u>171</u>	<u>124</u>
454.calculix	4	529	62.4	530	62.2	<u>530</u>	<u>62.2</u>	4	<u>384</u>	<u>85.9</u>	385	85.6	384	86.0
459.GemsFDTD	4	2230	19.0	<u>2220</u>	<u>19.1</u>	2216	19.2	4	2231	19.0	2228	19.0	<u>2229</u>	<u>19.0</u>
465.tonto	4	<u>594</u>	<u>66.2</u>	595	66.2	594	66.2	4	<u>578</u>	<u>68.0</u>	577	68.2	580	67.9
470.lbm	4	<u>3216</u>	<u>17.1</u>	3215	17.1	3216	17.1	2	1052	26.1	<u>1057</u>	<u>26.0</u>	1059	25.9
481.wrf	4	1389	32.2	1383	32.3	<u>1385</u>	<u>32.3</u>	4	<u>1386</u>	<u>32.2</u>	1382	32.3	1395	32.0
482.sphinx3	4	1799	43.3	<u>1801</u>	<u>43.3</u>	1813	43.0	2	<u>745</u>	<u>52.3</u>	751	51.9	731	53.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
'/usr/bin/taskset' used to bind processes to CPUs
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to physical,0
KMP_STACKSIZE set to 64M

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode
Adjacent Sector Prefetch Disabled
Hardware Prefetcher Disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.3

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Jan-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.3

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jan-2008
Hardware Availability: Jan-2008
Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.3

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Jan-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jan-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL480c
(3.16 GHz, Intel Xeon X5460)

SPECfp_rate2006 = 45.3

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jan-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/HP-Intel-ic10.1-linux-fp-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 16:00:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 February 2008.