



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp[®]2006 = **32.5**

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp_base2006 = **29.4**

CPU2006 license: 6


Test date: Apr-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

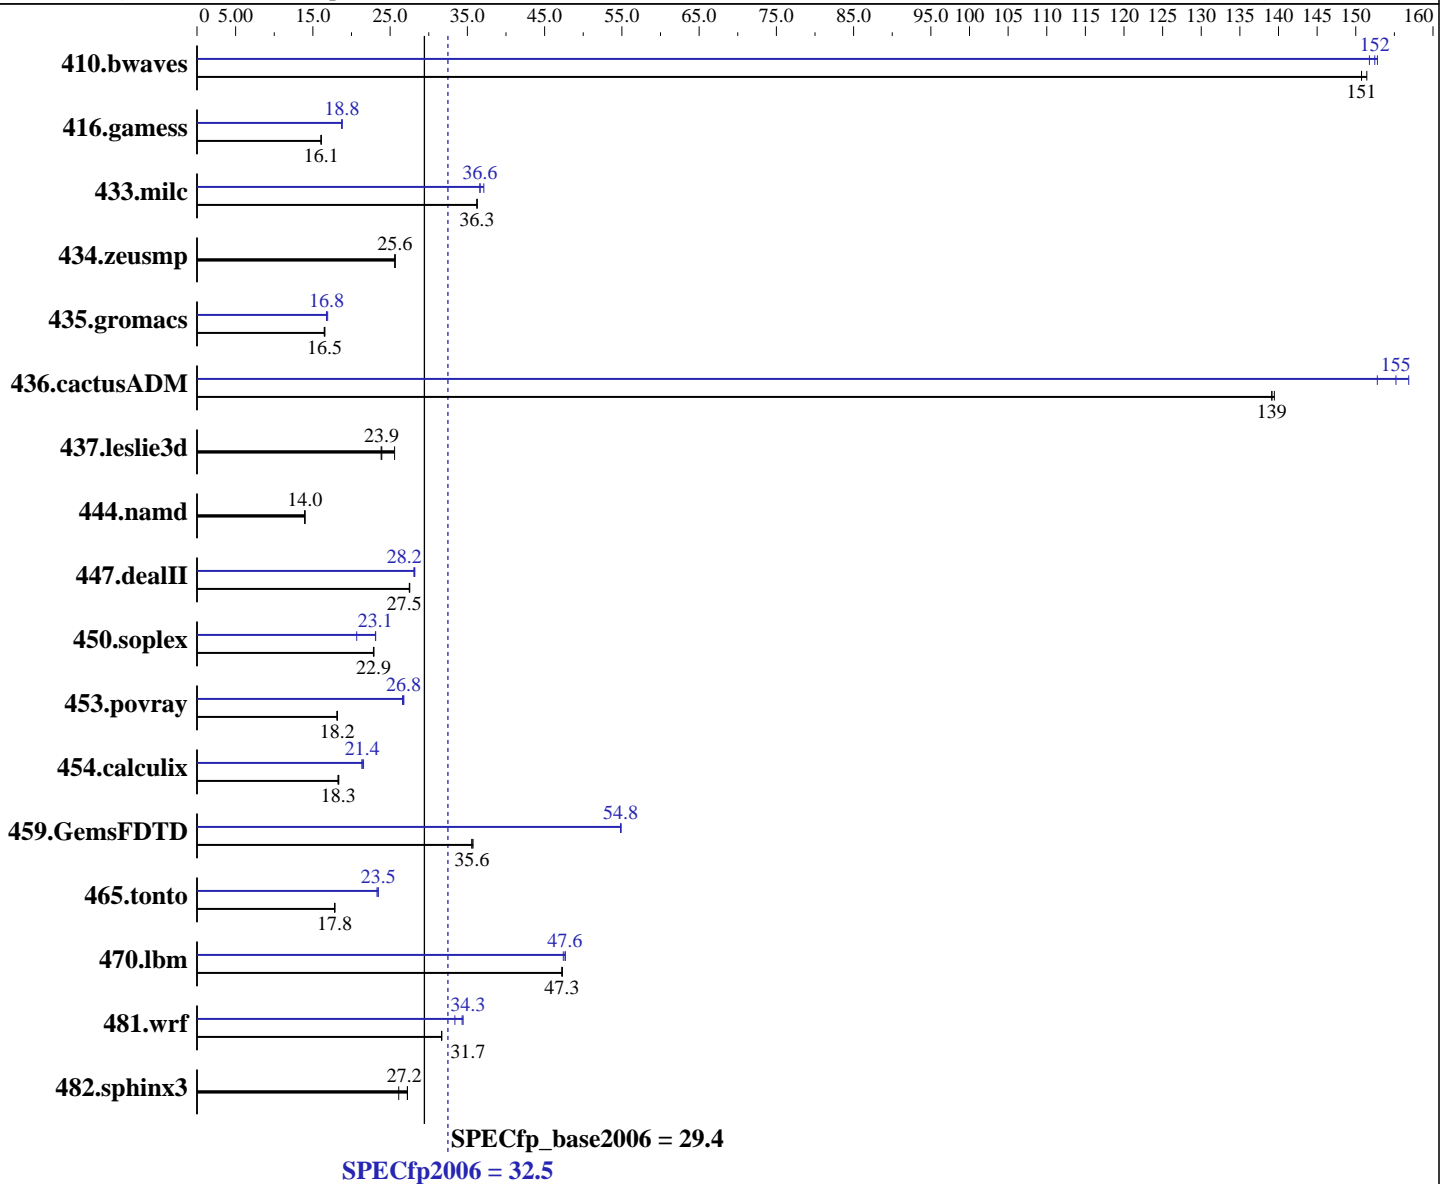

Hardware

CPU Name: Intel Xeon L5518
 CPU Characteristics: Intel Turbo Boost Technology up to 2.37 GHz
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Oracle Enterprise Linux Server release 5.4
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = **32.5**

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp_base2006 = **29.4**

CPU2006 license: 6

Test date: Apr-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6x4 GB DDR3-1333, 2 Rank, CL9 running at 1066 MHz)
 Disk Subsystem: 1 x 300 GB, SAS, 10000 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	90.2	151	89.7	151	90.1	151	89.1	152	89.5	152	88.9	153
416.gamess	1220	16.1	1218	16.1	1217	16.1	1045	18.7	1044	18.8	1042	18.8
433.milc	253	36.3	253	36.3	253	36.2	250	36.6	251	36.6	247	37.1
434.zeusmp	355	25.7	356	25.6	355	25.6	355	25.7	356	25.6	355	25.6
435.gromacs	431	16.5	434	16.5	432	16.5	426	16.8	425	16.8	422	16.9
436.cactusADM	85.7	139	85.9	139	85.9	139	78.2	153	76.2	157	77.0	155
437.leslie3d	394	23.8	393	23.9	367	25.6	394	23.8	393	23.9	367	25.6
444.namd	574	14.0	575	14.0	574	14.0	574	14.0	575	14.0	574	14.0
447.dealII	415	27.5	416	27.5	416	27.5	406	28.2	407	28.1	406	28.2
450.soplex	364	22.9	365	22.8	365	22.9	403	20.7	361	23.1	361	23.1
453.povray	294	18.1	293	18.2	292	18.2	199	26.8	199	26.8	200	26.6
454.calculix	449	18.4	451	18.3	451	18.3	383	21.6	386	21.4	386	21.4
459.GemsFDTD	298	35.6	298	35.6	297	35.7	193	54.9	193	54.8	193	54.8
465.tonto	553	17.8	551	17.8	552	17.8	420	23.5	420	23.5	422	23.3
470.lbm	291	47.2	291	47.3	291	47.3	288	47.6	290	47.4	288	47.7
481.wrf	353	31.6	353	31.7	353	31.7	335	33.4	324	34.5	325	34.3
482.sphinx3	715	27.2	746	26.1	716	27.2	715	27.2	746	26.1	716	27.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Base Compiler Invocation

C benchmarks:
 icc -m64

C++ benchmarks:
 icpc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 32.5

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp_base2006 = 29.4

CPU2006 license: 6

Test date: Apr-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 32.5

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp_base2006 = 29.4

CPU2006 license: 6

Test date: Apr-2010

Test sponsor: Oracle Corporation

Hardware Availability: May-2010

Tested by: Oracle Corporation

Software Availability: Dec-2009

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 32.5

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp_base2006 = 29.4

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-alloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

SPECfp2006 = 32.5

Sun Netra X4270 (Intel Xeon L5518 2.13GHz)

SPECfp_base2006 = 29.4

CPU2006 license: 6

Test sponsor: Oracle Corporation

Tested by: Oracle Corporation

Test date: Apr-2010

Hardware Availability: May-2010

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 07:12:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 May 2010.