



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 282

PowerEdge R815 (AMD Opteron 6134, 2.30 GHz)

SPECint\_rate\_base2006 = 226

CPU2006 license: 55


Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

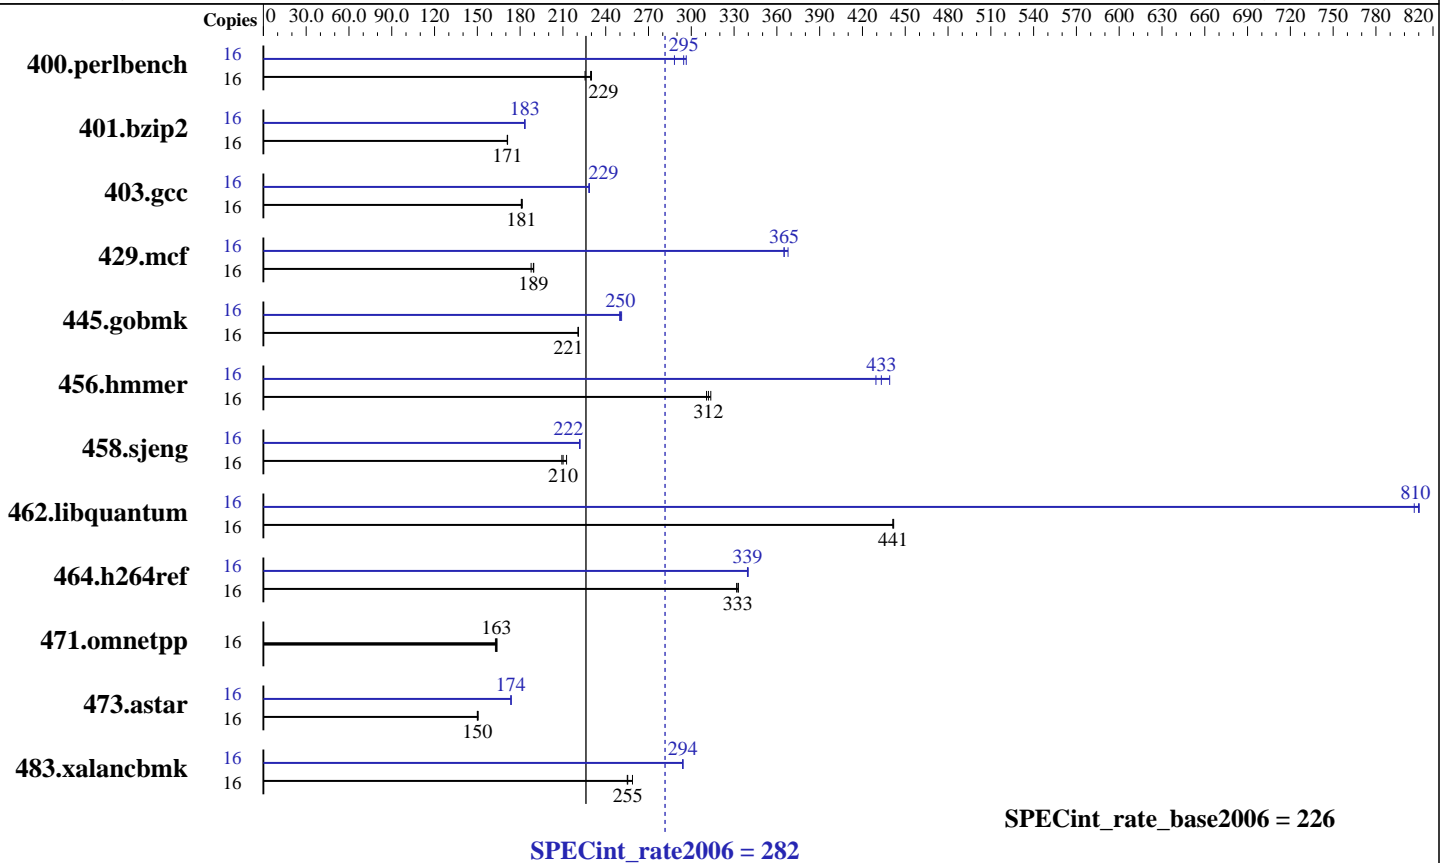

## Hardware

CPU Name: AMD Opteron 6134  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 4 cores  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)  
 Disk Subsystem: 1 x 148 GB 10000 RPM SAS  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: x86 Open64 4.2.3 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 282

PowerEdge R815 (AMD Opteron 6134, 2.30 GHz)

SPECint\_rate\_base2006 = 226

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Feb-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	693	226	679	230	<b>681</b>	<b>229</b>	16	542	288	<b>531</b>	<b>295</b>	527	296
401.bzip2	16	903	171	902	171	<b>903</b>	<b>171</b>	16	<b>842</b>	<b>183</b>	842	183	843	183
403.gcc	16	<b>712</b>	<b>181</b>	709	182	712	181	16	563	229	<b>564</b>	<b>229</b>	565	228
429.mcf	16	<b>771</b>	<b>189</b>	777	188	770	190	16	397	368	400	365	<b>400</b>	<b>365</b>
445.gobmk	16	<b>760</b>	<b>221</b>	760	221	761	221	16	<b>670</b>	<b>250</b>	672	250	668	251
456.hammer	16	<b>478</b>	<b>312</b>	476	314	480	311	16	348	429	<b>345</b>	<b>433</b>	340	439
458.sjeng	16	925	209	<b>921</b>	<b>210</b>	911	213	16	872	222	873	222	<b>873</b>	<b>222</b>
462.libquantum	16	<b>751</b>	<b>441</b>	751	441	750	442	16	<b>409</b>	<b>810</b>	411	807	409	810
464.h264ref	16	1067	332	1063	333	<b>1064</b>	<b>333</b>	16	1043	339	<b>1043</b>	<b>339</b>	1042	340
471.omnetpp	16	610	164	615	163	<b>612</b>	<b>163</b>	16	610	164	615	163	<b>612</b>	<b>163</b>
473.astar	16	<b>748</b>	<b>150</b>	749	150	746	151	16	647	174	647	174	<b>647</b>	<b>174</b>
483.xalancbmk	16	433	255	<b>432</b>	<b>255</b>	427	259	16	375	294	376	294	<b>375</b>	<b>294</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd1002mc-rate-revA-libs/64:/root/cpu2006-1.1/amd1002mc-rate-revA-libs/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>  
Binaries were compiled on SLES10 SP2 with binutils 2.18



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 282

PowerEdge R815 (AMD Opteron 6134, 2.30 GHz)

SPECint\_rate\_base2006 = 226

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Apr-2010  
Hardware Availability: Mar-2010  
Software Availability: Feb-2010

## Base Compiler Invocation

C benchmarks:  
opencc  
  
C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=barcelona -mso -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m  
  
C++ benchmarks:  
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on  
-CG:cmp\_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

## Peak Compiler Invocation

C benchmarks:  
opencc  
  
C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 282

PowerEdge R815 (AMD Opteron 6134, 2.30 GHz)

SPECint\_rate\_base2006 = 226

CPU2006 license: 55

Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

## Peak Portability Flags (Continued)

456.hmmr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -LNO:prefetch\_ahead=10 -CG:cmp\_peep=on -m32  
 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -ipa -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1 -LNO:prefetch=1  
 -LNO:ignore\_feedback=off -CG:p2align=on  
 -CG:unroll\_fb\_req=on -HP:bdt=2m:heap=2m

456.hmmr: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=0  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:local\_sched\_alg=1 -CG:cflow=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:cmp\_peep=on  
 -HP:bdt=2m:heap=2m

458.sjeng: -march=barcelona -mso -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
 -LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 282

PowerEdge R815 (AMD Opteron 6134, 2.30 GHz)

SPECint\_rate\_base2006 = 226

CPU2006 license: 55

Test date: Apr-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Feb-2010

## Peak Optimization Flags (Continued)

458.sjeng (continued):

-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum:

-march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-HP:bdtd=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref:

-march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar:

-march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -m32  
-HP:bdtd=2m:heap=2m

483.xalancbmk:

-march=barcelona -mso -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.html>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.3-flags-revA.xml>

<http://www.spec.org/cpu2006/flags/amd-platform-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 08:54:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 June 2010.

Standard Performance Evaluation Corporation

[info@spec.org](mailto:info@spec.org)

<http://www.spec.org/>