



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®2006 = 39.0

IBM System x3620 M3 (Intel Xeon L5640)

SPECfp_base2006 = 36.4

CPU2006 license: 11


Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: May-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

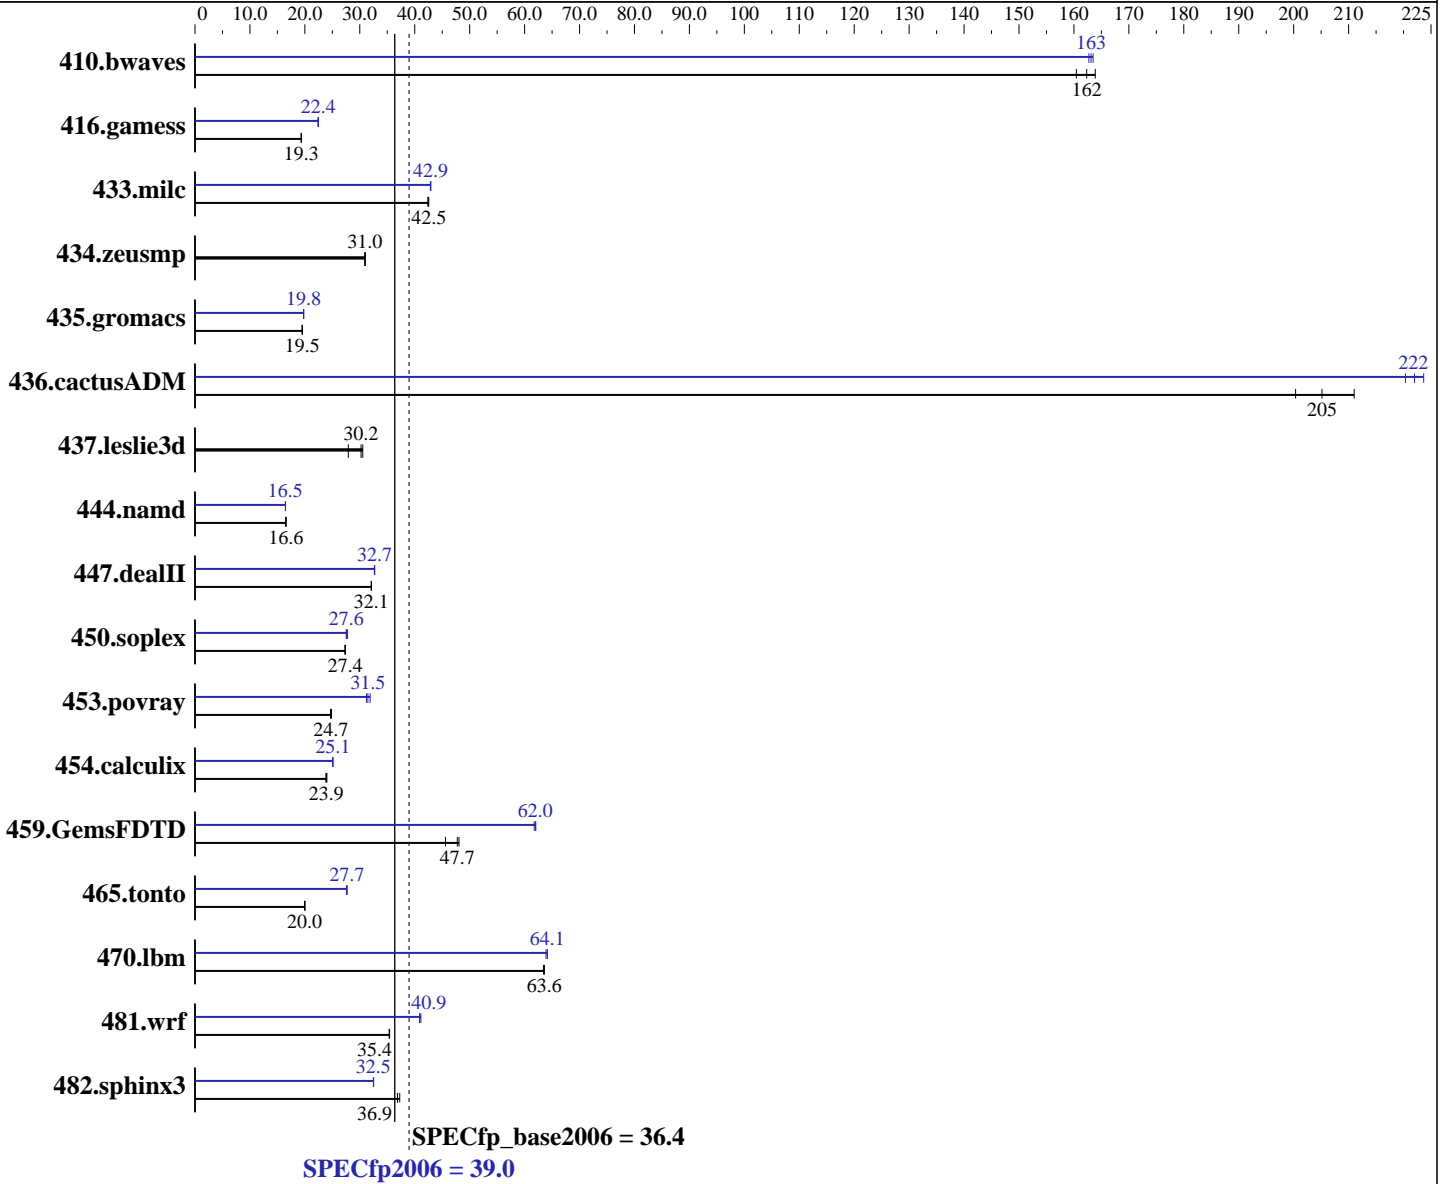

Hardware

CPU Name: Intel Xeon L5640
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM System x3620 M3 (Intel Xeon L5640)

SPECfp_base2006 = 36.4

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: May-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)
Disk Subsystem: 1 x 250 GB SATA, 7200RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	84.7	160	83.7	162	82.9	164	83.1	163	83.3	163	83.5	163
416.gamess	1012	19.3	1010	19.4	1013	19.3	872	22.5	873	22.4	873	22.4
433.milc	217	42.4	216	42.5	216	42.6	214	42.8	214	42.9	214	42.9
434.zeusmp	294	31.0	295	30.9	294	31.0	294	31.0	295	30.9	294	31.0
435.gromacs	365	19.6	366	19.5	366	19.5	361	19.8	361	19.8	361	19.8
436.cactusADM	59.6	200	58.2	205	56.6	211	53.8	222	54.2	220	53.4	224
437.leslie3d	337	27.9	311	30.2	308	30.5	337	27.9	311	30.2	308	30.5
444.namd	484	16.6	485	16.5	484	16.6	487	16.5	487	16.5	487	16.5
447.dealII	356	32.1	356	32.1	356	32.1	350	32.6	350	32.7	350	32.7
450.soplex	306	27.3	304	27.4	305	27.4	303	27.6	303	27.5	300	27.8
453.povray	215	24.7	214	24.9	215	24.7	170	31.2	169	31.5	167	31.9
454.calculix	346	23.9	345	23.9	344	24.0	329	25.1	329	25.1	329	25.1
459.GemsFDTD	233	45.6	221	48.1	222	47.7	171	62.0	172	61.7	171	62.0
465.tonto	492	20.0	492	20.0	493	20.0	357	27.6	356	27.7	356	27.7
470.lbm	216	63.6	217	63.4	216	63.6	214	64.1	214	64.1	215	63.9
481.wrf	315	35.4	316	35.4	316	35.4	272	41.1	273	40.9	273	40.9
482.sphinx3	523	37.3	529	36.9	528	36.9	599	32.5	600	32.5	600	32.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Platform Notes

Turbo Mode Enable
Turbo Boost set to Traditional
CPU C State Enable
Data Reuse Disable

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM System x3620 M3 (Intel Xeon L5640)

SPECfp_base2006 = 36.4

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: May-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM System x3620 M3 (Intel Xeon L5640)

SPECfp_base2006 = 36.4

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: May-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM System x3620 M3 (Intel Xeon L5640)

SPECfp_base2006 = 36.4

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: May-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp2006 = 39.0

IBM System x3620 M3 (Intel Xeon L5640)

SPECfp_base2006 = 36.4

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2010

Hardware Availability: May-2010

Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 08:21:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 June 2010.