



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6134)

SPECint_rate2006 = 285

SPECint_rate_base2006 = 246

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jul-2011

Hardware Availability: Mar-2010

Software Availability: Aug-2010

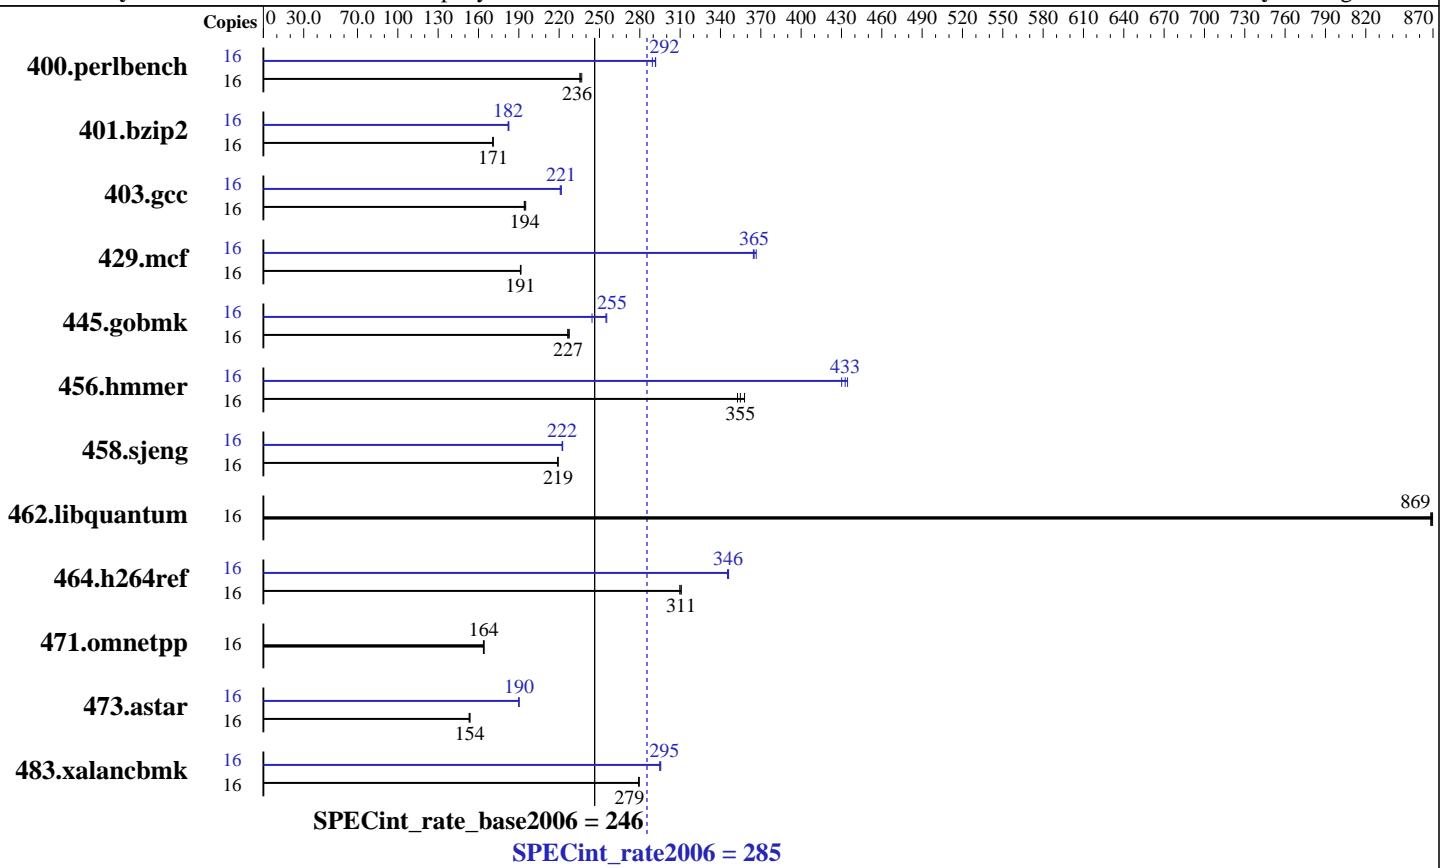

Hardware

CPU Name:	AMD Opteron 6134
CPU Characteristics:	
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 4 cores
Other Cache:	None
Memory:	64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 146 GB 15 K SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, Kernel 2.6.31.12-0.7-default
Compiler:	x86 Open64 4.3.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6134)

SPECint_rate2006 = 285

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2010

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	664	235	660	237	663	236	16	540	289	536	292	536	292
401.bzip2	16	905	171	903	171	904	171	16	847	182	848	182	845	183
403.gcc	16	663	194	664	194	660	195	16	581	222	582	221	583	221
429.mcf	16	763	191	762	192	763	191	16	398	367	400	365	400	364
445.gobmk	16	741	226	738	228	740	227	16	657	255	687	244	659	255
456.hammer	16	423	353	421	355	417	358	16	345	433	344	435	347	430
458.sjeng	16	883	219	884	219	883	219	16	871	222	871	222	870	223
462.libquantum	16	381	870	382	868	382	869	16	381	870	382	868	382	869
464.h264ref	16	1139	311	1140	311	1143	310	16	1026	345	1023	346	1024	346
471.omnetpp	16	610	164	609	164	611	164	16	610	164	609	164	611	164
473.astar	16	734	153	731	154	731	154	16	592	190	591	190	591	190
483.xalancbmk	16	395	280	395	279	396	279	16	374	295	373	296	374	295

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1002mc-rate-libs-revC/64:/cpu2006/amd1002mc-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6134)

SPECint_rate2006 = 285

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test date: Jul-2011

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2010

Tested by: Hewlett-Packard Company

Software Availability: Aug-2010

General Notes (Continued)

<http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6134)

SPECint_rate2006 = 285

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jul-2011

Hardware Availability: Mar-2010

Software Availability: Aug-2010

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
  -OPT:unroll_times_max=8 -OPT:unroll_size=256
  -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
  -CG:local_sched_alg=1 -CG:unroll_fb_req=on
  -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
  -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
  -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
  -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
  -CG:gcm=off -GRA:prioritize_by_density=on -m32
  -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
  -OPT:unroll_times_max=8 -OPT:unroll_size=256
  -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
  -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
  -LNO:ignore_feedback=off -CG:p2align=on
  -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
  -OPT:alias=disjoint -OPT:unroll_times_max=8
  -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
  -CG:local_sched_alg=1 -CG:cflow=0
  -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
  -HP:bdt=2m:heap=2m
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL385 G7
(2.3 GHz AMD Opteron 6134)

SPECint_rate2006 = 285

SPECint_rate_base2006 = 246

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Jul-2011

Hardware Availability: Mar-2010

Software Availability: Aug-2010

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
           -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
           -IPA:pu_reorder=2 -CG:ptr_load_use=0
           -OPT:unroll_times_max=8 -INLINE:aggressive=on
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
              -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
              -CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
            -WOPT:if_conv=0 -GRA:optimize_boundary=on
            -OPT:alias=disjoint -INLINE:aggressive=on
            -IPA:small_pu=3000 -IPA:plimit=3000 -m32
            -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
                -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
                -fno-emit-exceptions
                -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Thu Jul 24 00:03:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 August 2011.