



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp[®]2006 = 26.1

ASUSTek M4A89GTD PRO/USB3 (Phenom II X2 560)

SPECfp_base2006 = 25.4

CPU2006 license: 13


Test date: Jun-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

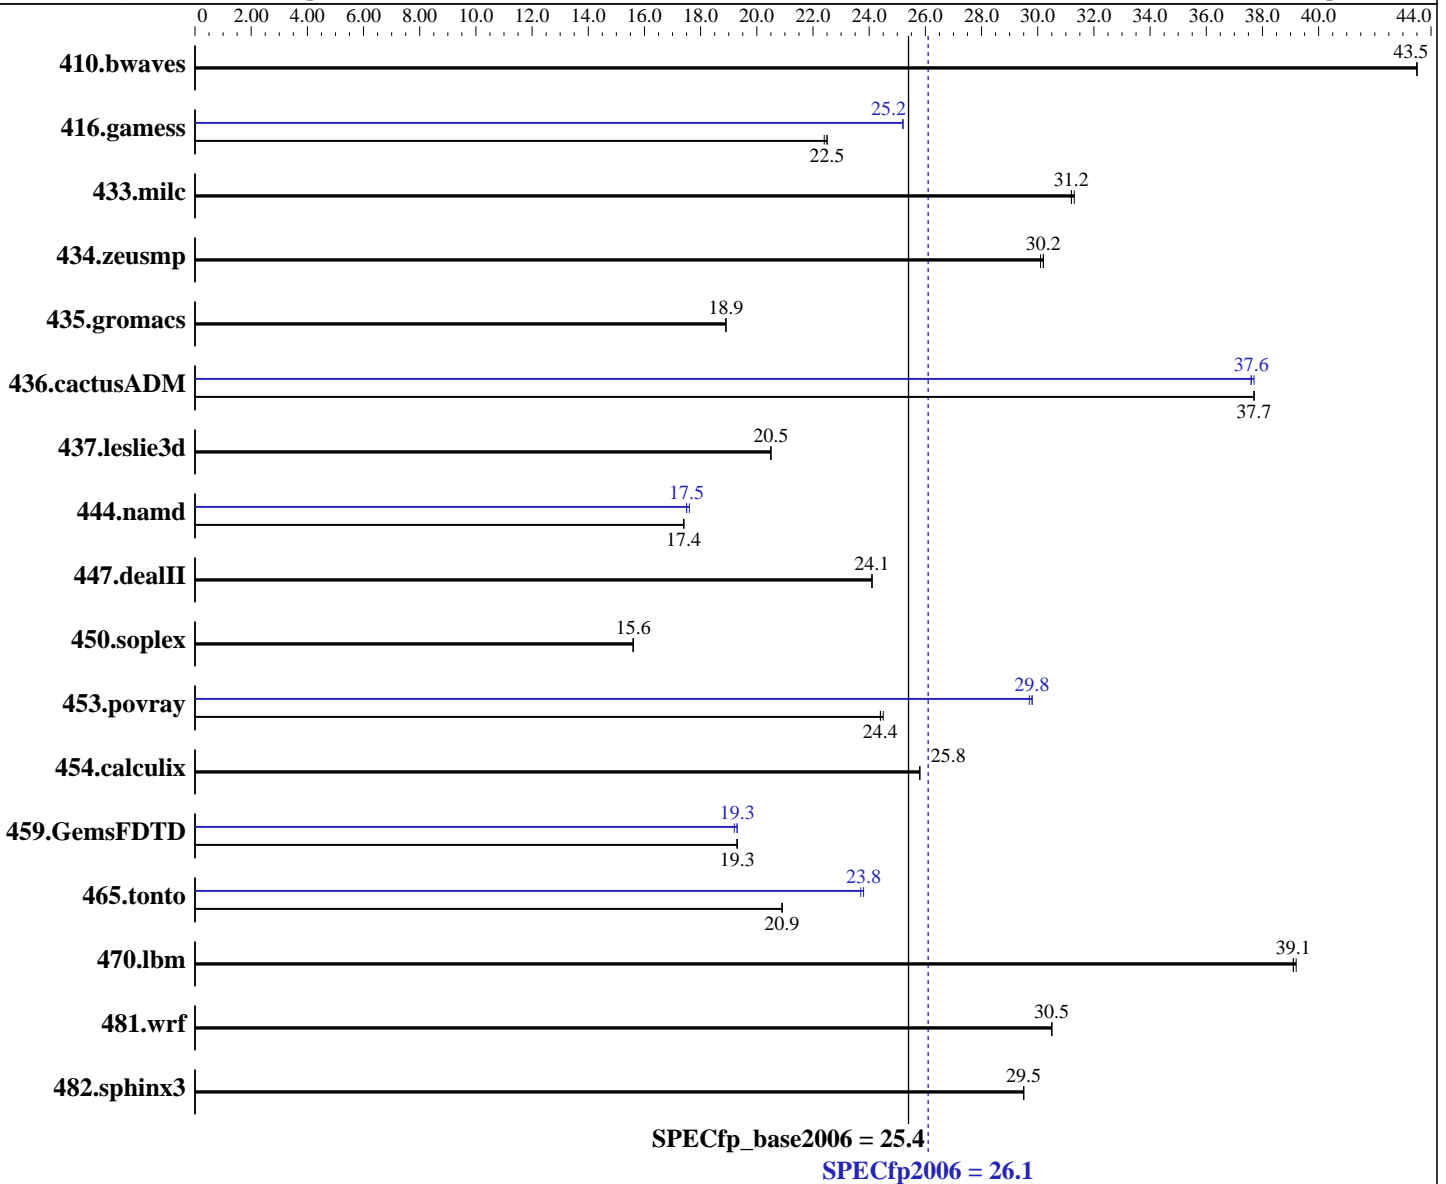

Hardware

CPU Name: AMD Phenom II X2 560
 CPU Characteristics:
 CPU MHz: 3300
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler XE for Intel 64
 Version 12.0.3.176 Build 20110309
 Intel Visual Fortran Compiler XE for Intel 64
 Version 12.0.3.176 Build 20110309
 Microsoft Visual Studio 2008 Professional SP1
 (for libraries)
 Auto Parallel: Yes
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.1

ASUSTek M4A89GTD PRO/USB3 (Phenom II X2 560)

SPECfp_base2006 = 25.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 4 GB (2 x 2 GB 2Rx4 PC3-10600U-9)
Disk Subsystem: 1 TB Seagate SATA, 7200 RPM
Other Hardware: None

System State: Default
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>313</u>	<u>43.5</u>	313	43.5	313	43.5	<u>313</u>	<u>43.5</u>	313	43.5	313	43.5
416.gamess	872	22.4	871	22.5	<u>871</u>	<u>22.5</u>	<u>776</u>	<u>25.2</u>	776	25.2	777	25.2
433.milc	294	31.3	294	31.2	<u>294</u>	<u>31.2</u>	294	31.3	294	31.2	<u>294</u>	<u>31.2</u>
434.zeusmp	302	30.1	302	30.2	<u>302</u>	<u>30.2</u>	302	30.1	302	30.2	<u>302</u>	<u>30.2</u>
435.gromacs	<u>377</u>	<u>18.9</u>	377	18.9	377	18.9	<u>377</u>	<u>18.9</u>	377	18.9	377	18.9
436.cactusADM	<u>317</u>	<u>37.7</u>	317	37.7	317	37.7	318	37.6	<u>318</u>	<u>37.6</u>	317	37.7
437.leslie3d	458	20.5	458	20.5	<u>458</u>	<u>20.5</u>	458	20.5	458	20.5	<u>458</u>	<u>20.5</u>
444.namd	462	17.4	<u>462</u>	<u>17.4</u>	462	17.4	<u>457</u>	<u>17.5</u>	457	17.5	457	17.6
447.dealII	475	24.1	475	24.1	<u>475</u>	<u>24.1</u>	475	24.1	475	24.1	<u>475</u>	<u>24.1</u>
450.soplex	<u>536</u>	<u>15.6</u>	536	15.6	536	15.6	<u>536</u>	<u>15.6</u>	536	15.6	536	15.6
453.povray	<u>218</u>	<u>24.4</u>	218	24.4	218	24.5	179	29.8	<u>179</u>	<u>29.8</u>	179	29.7
454.calculix	319	25.8	<u>319</u>	<u>25.8</u>	319	25.8	319	25.8	<u>319</u>	<u>25.8</u>	319	25.8
459.GemsFDTD	550	19.3	549	19.3	<u>550</u>	<u>19.3</u>	552	19.2	<u>551</u>	<u>19.3</u>	550	19.3
465.tonto	471	20.9	472	20.9	<u>472</u>	<u>20.9</u>	415	23.7	414	23.8	<u>414</u>	<u>23.8</u>
470.lbm	<u>351</u>	<u>39.1</u>	351	39.1	351	39.2	<u>351</u>	<u>39.1</u>	351	39.1	351	39.2
481.wrf	<u>367</u>	<u>30.5</u>	366	30.5	367	30.5	<u>367</u>	<u>30.5</u>	366	30.5	367	30.5
482.sphinx3	<u>662</u>	<u>29.5</u>	661	29.5	662	29.5	<u>662</u>	<u>29.5</u>	661	29.5	662	29.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
OMP_NUM_THREADS set to number of processors cores
KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.1

ASUSTek M4A89GTD PRO/USB3 (Phenom II X2 560)

SPECfp_base2006 = 25.4

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Jun-2011
Hardware Availability: Feb-2011
Software Availability: Apr-2011

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 -names:lowercase
416.gamess: -DSPEC_CPU_P64
433.milc: -DSPEC_CPU_P64
434.zeusmp: -DSPEC_CPU_P64
435.gromacs: -DSPEC_CPU_P64
436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
437.leslie3d: -DSPEC_CPU_P64
444.namd: -DSPEC_CPU_P64 /TP
447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
450.soplex: -DSPEC_CPU_P64
453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
459.GemsFDTD: -DSPEC_CPU_P64
465.tonto: -DSPEC_CPU_P64
470.lbm: -DSPEC_CPU_P64
481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 -Qprec-div- /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:
/arch:SSE3 -Qipo -O3 -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.1

ASUSTek M4A89GTD PRO/USB3 (Phenom II X2 560)

SPECfp_base2006 = 25.4

CPU2006 license: 13

Test date: Jun-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
sh1W64M.lib -link /FORCE:MULTIPLE

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp2006 = 26.1

ASUSTek M4A89GTD PRO/USB3 (Phenom II X2 560)

SPECfp_base2006 = 25.4

CPU2006 license: 13

Test date: Jun-2011

Test sponsor: Intel Corporation

Hardware Availability: Feb-2011

Tested by: Intel Corporation

Software Availability: Apr-2011

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel
/F1000000000

465.tonto: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: /arch:SSE3(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2
-Qauto-ilp32 /F1000000000

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-winx64-revC.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:26:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 September 2011.