



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECint®\_rate2006 = 72.1

Intel DH57JG Motherboard (Intel Core i5-660)

SPECint\_rate\_base2006 = 66.2

CPU2006 license: 13


Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2010

Tested by: Intel Corporation

Software Availability: Apr-2011

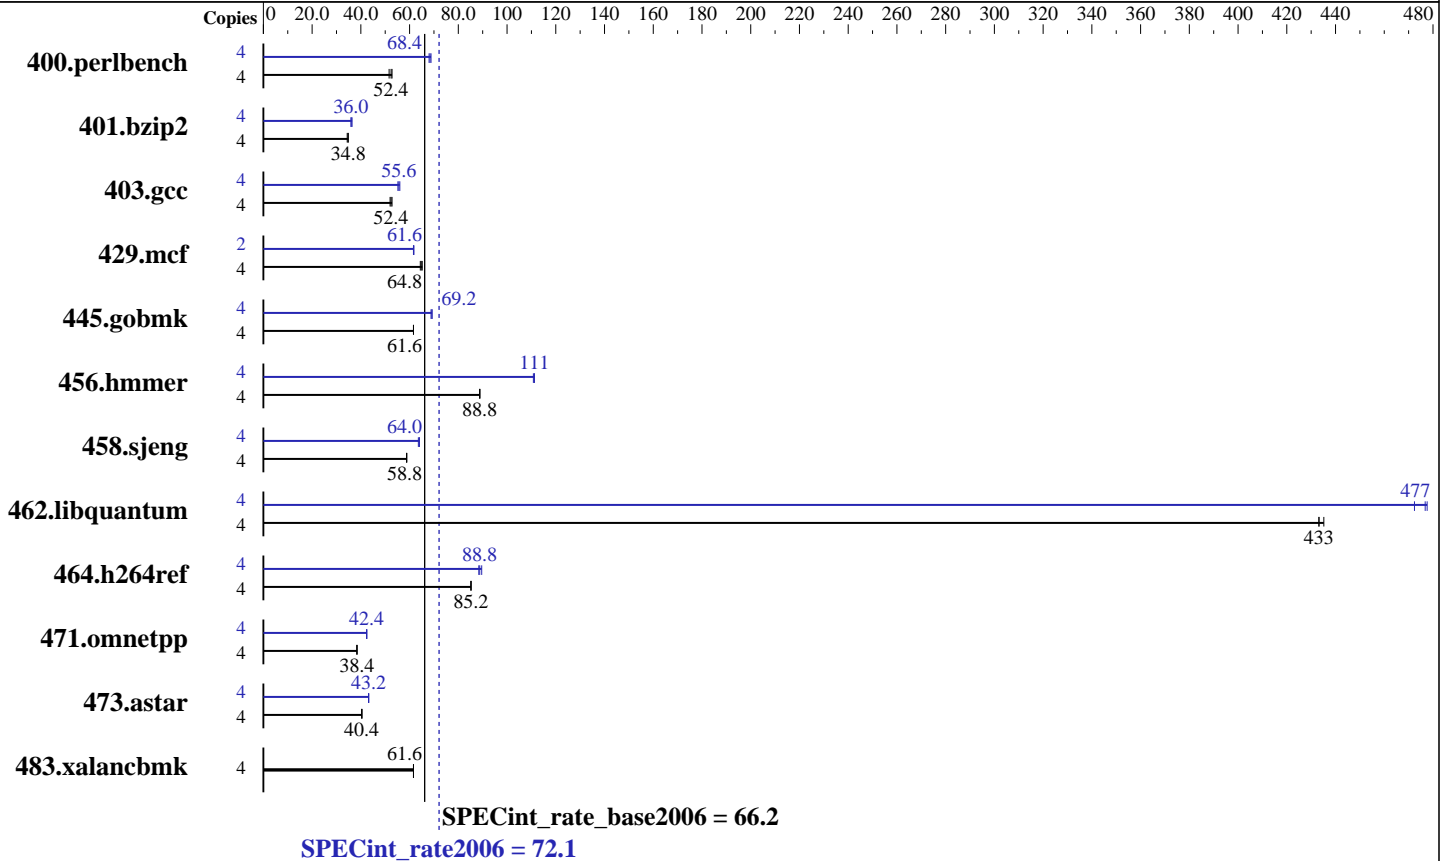

### Hardware

CPU Name: Intel Core i5-660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 4 GB (2 x 2 GB 2Rx8 PC3-10600U-9)  
 Disk Subsystem: Seagate 1 TB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Windows 7 Ultimate (64-bit)  
 Compiler: Intel C++ Compiler XE for IA32 and Intel 64 Version 12.0.3.176 Build 20110309  
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap Library Version 9.01 from <http://www.microquill.com/>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 72.1

Intel DH57JG Motherboard (Intel Core i5-660)

SPECint\_rate\_base2006 = 66.2

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2010

Tested by: Intel Corporation

Software Availability: Apr-2011

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>746</b>	<u>52.4</u>	743	52.8	755	51.6	4	576	68.0	<b>573</b>	<u>68.4</u>	569	68.8
401.bzip2	4	1128	34.4	<b>1115</b>	<u>34.8</u>	1108	34.8	4	1071	36.0	<b>1069</b>	<u>36.0</u>	1061	36.4
403.gcc	4	610	52.8	<b>615</b>	<u>52.4</u>	619	52.0	4	575	56.0	<b>581</b>	<u>55.6</u>	584	55.2
429.mcf	4	559	65.2	566	64.4	<b>564</b>	<u>64.8</u>	2	296	61.6	296	61.8	<b>296</b>	<u>61.6</u>
445.gobmk	4	679	61.6	<b>680</b>	<u>61.6</u>	680	61.6	4	606	69.2	<b>607</b>	<u>69.2</u>	609	68.8
456.hammer	4	<b>420</b>	<u>88.8</u>	420	88.8	421	88.8	4	336	111	337	111	<b>336</b>	<u>111</u>
458.sjeng	4	<b>824</b>	<u>58.8</u>	824	58.8	822	58.8	4	759	63.6	<b>757</b>	<u>64.0</u>	756	64.0
462.libquantum	4	<b>191</b>	<u>433</u>	191	433	190	435	4	174	478	<b>174</b>	<u>477</u>	175	472
464.h264ref	4	1037	85.2	<b>1038</b>	<u>85.2</u>	1040	85.2	4	989	89.6	<b>995</b>	<u>88.8</u>	1001	88.4
471.omnetpp	4	648	38.4	<b>648</b>	<u>38.4</u>	648	38.4	4	592	42.4	592	42.4	<b>592</b>	<u>42.4</u>
473.astar	4	693	40.4	692	40.4	<b>692</b>	<u>40.4</u>	4	<b>652</b>	<u>43.2</u>	652	43.2	653	43.2
483.xalancbmk	4	449	61.6	449	61.6	<b>449</b>	<u>61.6</u>	4	449	61.6	449	61.6	<b>449</b>	<u>61.6</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

The start command with the /affinity switch was used to bind processes to cores

## General Notes

Tested systems can be used with Shin-G ATX case,  
PC Power and Cooling 1200W power supply

## Base Compiler Invocation

C benchmarks:

```
icl -Qvc9 -Qstd=c99
```

C++ benchmarks:

```
icl -Qvc9
```

## Base Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 72.1

Intel DH57JG Motherboard (Intel Core i5-660)

SPECint\_rate\_base2006 = 66.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jul-2011

Hardware Availability: Jan-2010

Software Availability: Apr-2011

## Base Optimization Flags

C benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000`

C++ benchmarks:

`-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features  
/F512000000 shlw32M.lib -link /FORCE:MULTIPLE`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icl -Qvc9 -Qstd=c99`

`456.hmmr: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`458.sjeng: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

`462.libquantum: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe  
-Qstd=c99`

C++ benchmarks (except as noted below):

`icl -Qvc9`

`473.astar: C:/Program Files (x86)/Intel/ComposerXE-2011/bin/intel64/icl.exe`

## Peak Portability Flags

`403.gcc: -DSPEC_CPU_WIN32`

`456.hmmr: -DSPEC_CPU_P64`

`458.sjeng: -DSPEC_CPU_P64`

`462.libquantum: -DSPEC_CPU_P64`

`464.h264ref: -DWIN32 -DSPEC_CPU_NO_INTTYPES`

`473.astar: -DSPEC_CPU_P64`

`483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 72.1

Intel DH57JG Motherboard (Intel Core i5-660)

SPECint\_rate\_base2006 = 66.2

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2010

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Optimization Flags

C benchmarks:

400.perlbench: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch  
/F512000000 shlW32M.lib -link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias  
/F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qopt-prefetch  
/F512000000

458.sjeng: -Qauto-ilp32 -QxSSE4.2(pass 2) -Qprof\_gen(pass 1)  
-Qprof\_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4  
/F512000000

462.libquantum: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof\_gen(pass 1) -Qprof\_use(pass 2)  
-Qipo -O3 -Qprec-div- -Qansi-alias  
-Qopt-ra-region-strategy=block /F512000000 shlW32M.lib  
-link /FORCE:MULTIPLE

473.astar: -Qauto-ilp32 -QxSSE4.2 -Qipo -O3 -Qprec-div-  
-Qopt-prefetch /F512000000 shlW64M.lib  
-link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint\_rate2006 = 72.1

Intel DH57JG Motherboard (Intel Core i5-660)

SPECint\_rate\_base2006 = 66.2

CPU2006 license: 13

Test date: Jul-2011

Test sponsor: Intel Corporation

Hardware Availability: Jan-2010

Tested by: Intel Corporation

Software Availability: Apr-2011

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

456.hmmcr: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

458.sjeng: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

462.libquantum: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

C++ benchmarks:

473.astar: -link -LIBPATH:C:/Program Files (x86)/Intel/ComposerXE-2011/compiler/lib/intel64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib/AMD64  
-link -LIBPATH:C:/Program Files (x86)/Microsoft Visual Studio 9.0/VC/lib  
-link -LIBPATH:C:/Program Files (x86)/Microsoft SDKs/Windows/v7.0A/lib/x64

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.html>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12-win32-revC.xml>

<http://www.spec.org/cpu2006/flags/Intel-Windows-Platform-Settings.20110719.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 22:12:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 August 2011.