



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6234)

SPECint<sup>®</sup>\_rate2006 = 387

SPECint\_rate\_base2006 = 345

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

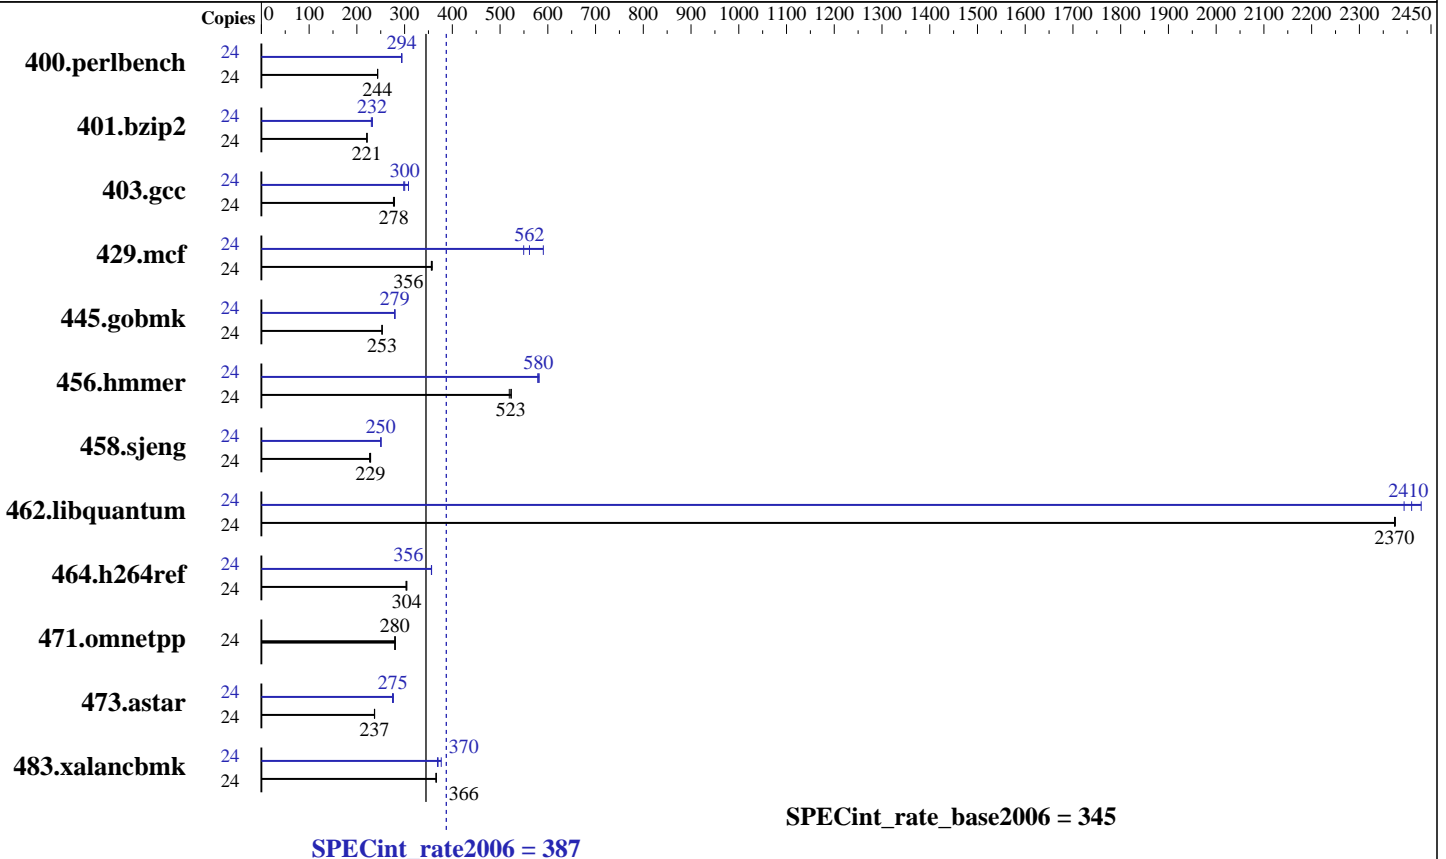

**Hardware**

CPU Name: AMD Opteron 6234  
 CPU Characteristics: AMD Turbo CORE technology up to 3.00 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 384 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1024 GB SATA, 7200 RPM  
 Other Hardware: None

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.2,  
 Kernel 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 4.2.5.2 of x86 Open64 Compiler Suite (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6234)

SPECint\_rate2006 = 387

SPECint\_rate\_base2006 = 345

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2012  
Hardware Availability: Nov-2011  
Software Availability: Dec-2011

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	964	243	963	244	<b>963</b>	<b>244</b>	24	798	294	797	294	<b>798</b>	<b>294</b>
401.bzip2	24	<b>1048</b>	<b>221</b>	1045	222	1049	221	24	997	232	<b>997</b>	<b>232</b>	1006	230
403.gcc	24	698	277	693	279	<b>696</b>	<b>278</b>	24	627	308	648	298	<b>644</b>	<b>300</b>
429.mcf	24	611	358	615	356	<b>614</b>	<b>356</b>	24	371	591	<b>390</b>	<b>562</b>	398	549
445.gobmk	24	994	253	997	252	<b>996</b>	<b>253</b>	24	900	280	<b>901</b>	<b>279</b>	901	279
456.hammer	24	<b>429</b>	<b>523</b>	431	519	428	524	24	385	582	387	579	<b>386</b>	<b>580</b>
458.sjeng	24	1269	229	<b>1270</b>	<b>229</b>	1281	227	24	1161	250	<b>1160</b>	<b>250</b>	1159	251
462.libquantum	24	209	2380	<b>209</b>	<b>2370</b>	210	2370	24	205	2430	<b>206</b>	<b>2410</b>	208	2390
464.h264ref	24	1753	303	<b>1745</b>	<b>304</b>	1744	304	24	1491	356	1490	357	<b>1491</b>	<b>356</b>
471.omnetpp	24	<b>536</b>	<b>280</b>	537	280	534	281	24	<b>536</b>	<b>280</b>	537	280	534	281
473.astar	24	<b>711</b>	<b>237</b>	711	237	710	237	24	609	277	<b>613</b>	<b>275</b>	613	275
483.xalancbmk	24	452	366	452	366	<b>452</b>	<b>366</b>	24	440	377	<b>447</b>	<b>370</b>	449	369

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst  
Set kernel/randomize\_va\_space=0 in /etc/sysctl.conf

Set vm/nr\_hugepages=21504 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "896"  
LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1104-rate-libs-revB/32:/usr/cpu2006/amd1104-rate-libs-revB/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6282SE chips + 64GB Memory using RHEL 6.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6234)

SPECint\_rate2006 = 387

SPECint\_rate\_base2006 = 345

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Jan-2012  
Hardware Availability: Nov-2011  
Software Availability: Dec-2011

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-march=bdver1 -Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=on  
-IPA:plimit=8000 -IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso  
-LNO:prefetch=2

C++ benchmarks:  
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-D\_\_OPEN64\_FAST\_SET -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6234)

SPECint\_rate2006 = 387

SPECint\_rate\_base2006 = 345

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0  
 -IPA:plimit=20000 -OPT:unroll\_times\_max=8  
 -OPT:unroll\_size=256 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -WOPT:if\_conv=0 -WOPT:sib=on -CG:local\_sched\_alg=1  
 -CG:unroll\_fb\_req=on -CG:movext\_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0  
 -OPT:alias=disjoint -OPT:goto=off -CG:local\_sched\_alg=1  
 -HP:bd=2m:heap=2m

403.gcc: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:trip\_count=256  
 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2 -m32  
 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll\_times\_max=5 -ipa  
 -INLINE:aggressive=on -CG:gcm=off  
 -GRA:prioritize\_by\_density=on -m32 -HP:bd=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:unroll\_size=256  
 -OPT:unroll\_times\_max=8 -OPT:keep\_ext=on -IPA:plimit=750  
 -IPA:min\_hotness=300 -IPA:pu\_reorder=1  
 -LNO:ignore\_feedback=off -WOPT:if\_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -LNO:prefetch=2  
 -OPT:alias=disjoint -OPT:unroll\_times\_max=16  
 -OPT:unroll\_size=512 -OPT:unroll\_level=2 -OPT:keep\_ext=on  
 -CG:cflow=0 -CG:cmp\_peep=on -CG:pre\_local\_sched=off  
 -HP:bd=2m:heap=2m

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6234)

SPECint\_rate2006 = 387

SPECint\_rate\_base2006 = 345

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Jan-2012

Hardware Availability: Nov-2011

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

458.sjeng: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -CG:ptr\_load\_use=0  
-CG:divrem\_opt=on -CG:movext\_icmp=off -CG:locs\_best=on  
-LNO:full\_unroll=10 -IPA:pu\_reorder=2 -HP:bd=2m:heap=2m  
-WOPT:sib=on

462.libquantum: -march=bdver1 -Ofast -mso -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=16 -LNO:prefetch=2  
-LNO:prefetch\_ahead=4 -LNO:pf2=0 -CG:local\_sched\_alg=1  
-INLINE:aggressive=on -IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=300

464.h264ref: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -OPT:unroll\_size=256  
-OPT:unroll\_times\_max=2 -IPA:plimit=20000  
-OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=bdver1 -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-GRA:optimize\_boundary=on -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:small\_pu=3000 -IPA:plimit=3000  
-m32 -HP:bdt=2m:heap=2m

483.xalancbmk: -march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -GRA:unspill=on -TENV:frame\_pointer=off  
-fno-emit-exceptions  
-L/root/work/libraries/SmartHeap-10/lib -lsmartheap

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.html>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/amd-platform-rate-revB.20120103.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-425-flags-rate-revB.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2022TG-HTRF  
(H8DGT-HF, AMD Opteron 6234)

SPECint\_rate2006 = 387

SPECint\_rate\_base2006 = 345

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Jan-2012

**Hardware Availability:** Nov-2011

**Software Availability:** Dec-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 07:53:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 April 2012.