



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint®_rate2006 = 138

SuperServer 5037MC-H8TRF (X9SCD-F, Intel E3-1260L)

SPECint_rate_base2006 = 133

CPU2006 license: 001176


Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Aug-2011

Tested by: Supermicro

Software Availability: Oct-2011

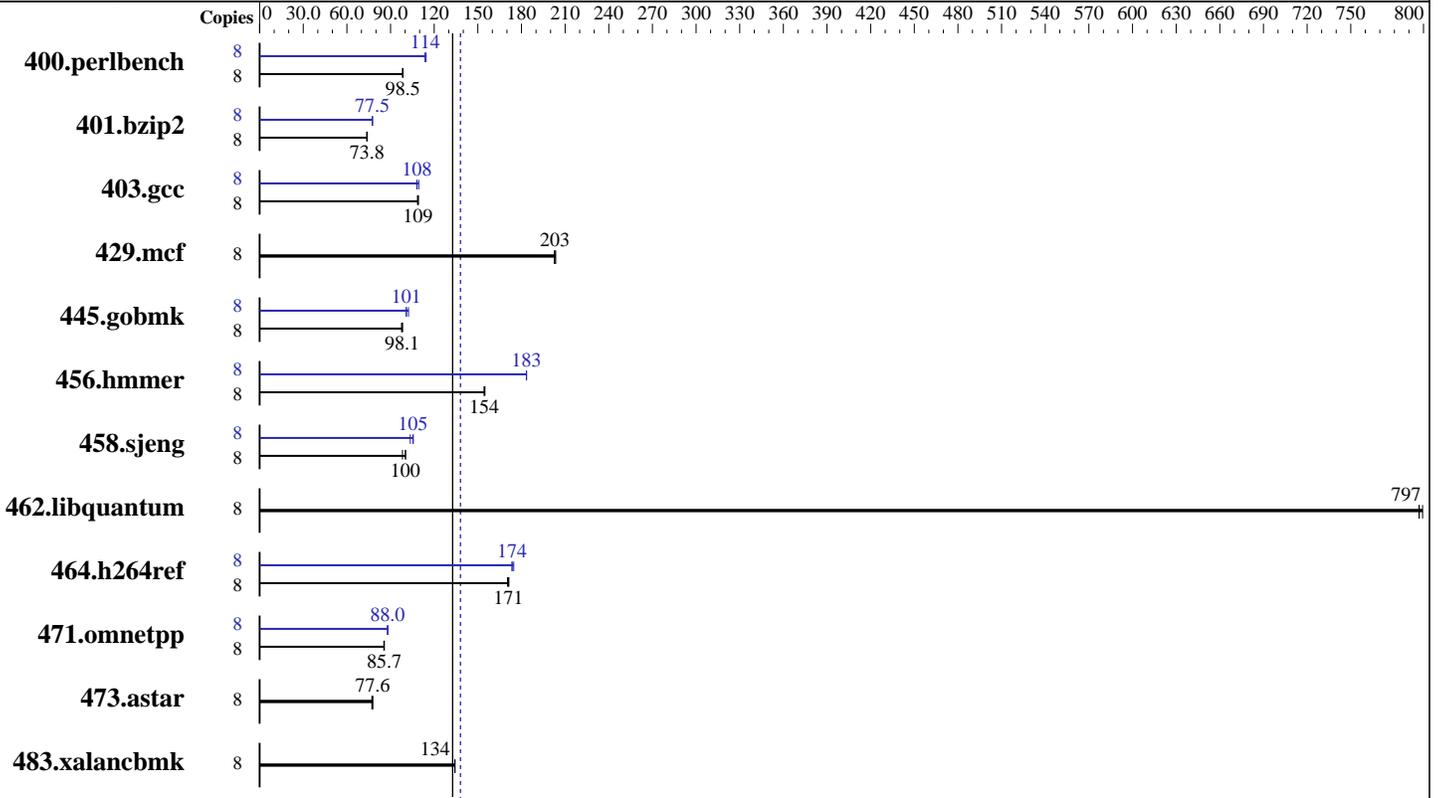

SPECint_rate2006 = 138

SPECint_rate_base2006 = 133

Hardware

CPU Name: Intel Xeon E3-1260L
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (8 x 4 GB 2Rx8 PC3-10600E-9, ECC)
 Disk Subsystem: 1 x 500 GB SATA III, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server Release 6.1, Kernel 2.6.32-131.0.15.el6.x86_64
 Compiler: C/C++; Version 12.1.0.225 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V9.01



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 138

SuperServer 5037MC-H8TRF (X9SCD-F, Intel E3-1260L)

SPECint_rate_base2006 = 133

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Aug-2011

Tested by: Supermicro

Software Availability: Oct-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	793	98.5	793	98.5	796	98.2	8	683	114	686	114	687	114
401.bzip2	8	1046	73.8	1048	73.7	1044	74.0	8	996	77.5	994	77.7	998	77.3
403.gcc	8	590	109	594	109	591	109	8	589	109	595	108	596	108
429.mcf	8	360	203	359	203	359	204	8	360	203	359	203	359	204
445.gobmk	8	860	97.6	855	98.1	855	98.2	8	831	101	833	101	820	102
456.hammer	8	483	154	482	155	483	154	8	407	183	407	184	407	183
458.sjeng	8	965	100	966	100	986	98.2	8	935	104	916	106	919	105
462.libquantum	8	208	797	208	797	207	799	8	208	797	208	797	207	799
464.h264ref	8	1034	171	1034	171	1039	170	8	1020	174	1014	175	1020	174
471.omnetpp	8	584	85.7	585	85.4	584	85.7	8	568	88.0	568	88.0	568	88.0
473.astar	8	723	77.6	722	77.8	728	77.2	8	723	77.6	722	77.8	728	77.2
483.xalancbmk	8	412	134	411	134	411	134	8	412	134	411	134	411	134

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 138

SuperServer 5037MC-H8TRF (X9SCD-F, Intel E3-1260L)

SPECint_rate_base2006 = 133

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Aug-2011

Tested by: Supermicro

Software Availability: Oct-2011

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 138

SuperServer 5037MC-H8TRF (X9SCD-F, Intel E3-1260L)

SPECint_rate_base2006 = 133

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Aug-2011

Tested by: Supermicro

Software Availability: Oct-2011

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECint_rate2006 = 138

SuperServer 5037MC-H8TRF (X9SCD-F, Intel E3-1260L)

SPECint_rate_base2006 = 133

CPU2006 license: 001176

Test date: Mar-2012

Test sponsor: Supermicro

Hardware Availability: Aug-2011

Tested by: Supermicro

Software Availability: Oct-2011

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>
<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 04:18:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 April 2012.