



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 391**

PowerEdge M420 (Intel Xeon E5-2450, 2.10 GHz)

**SPECfp\_rate\_base2006 = 380**

CPU2006 license: 55


Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

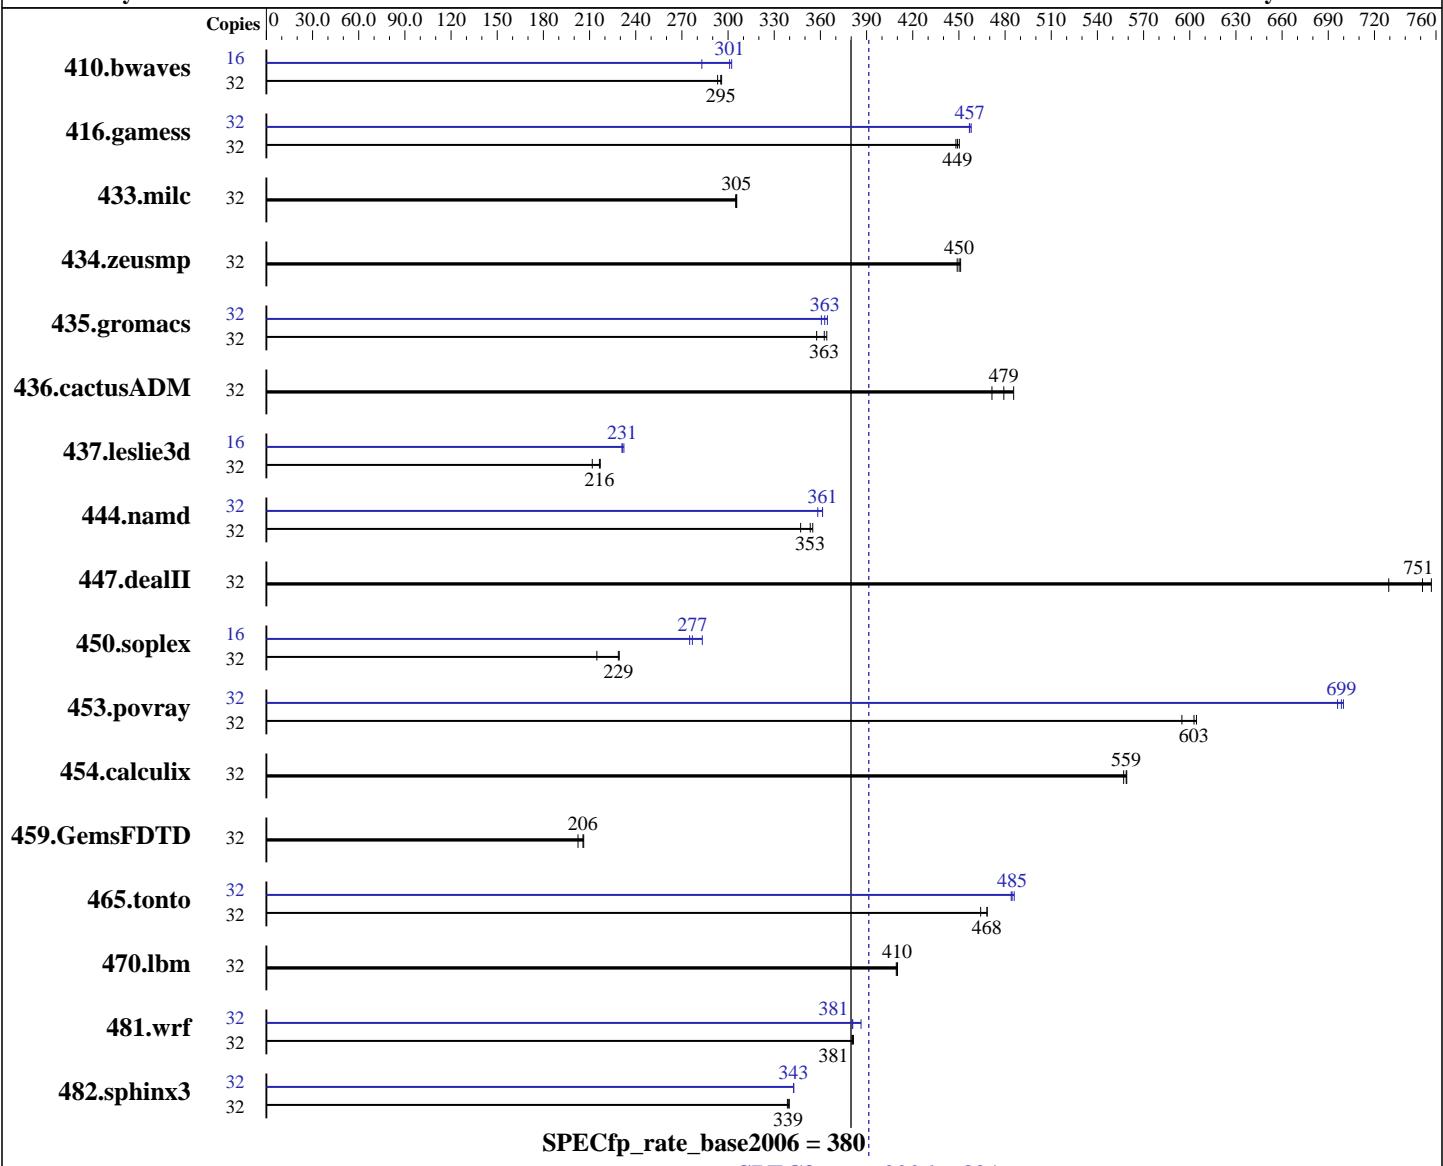

## Hardware

CPU Name: Intel Xeon E5-2450  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: SUSE Linux Enterprise Server 11 SP2 (x86\_64)  
 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE  
 for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran  
 Studio XE for Linux  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (add definition here)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 391**

PowerEdge M420 (Intel Xeon E5-2450, 2.10 GHz)

**SPECfp\_rate\_base2006 = 380**

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 50 GB SATA SSD, RAID 0  
 Other Hardware: None

Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>1473</b>	<b>295</b>	1470	296	1483	293	16	719	302	768	283	<b>722</b>	<b>301</b>
416.gamess	32	1391	450	1398	448	<b>1395</b>	<b>449</b>	32	<b>1371</b>	<b>457</b>	1372	457	1368	458
433.milc	32	963	305	<b>962</b>	<b>305</b>	961	306	32	963	305	<b>962</b>	<b>305</b>	961	306
434.zeusmp	32	<b>647</b>	<b>450</b>	646	451	649	449	32	<b>647</b>	<b>450</b>	646	451	649	449
435.gromacs	32	627	364	639	358	<b>630</b>	<b>363</b>	32	<b>630</b>	<b>363</b>	634	361	627	365
436.cactusADM	32	788	486	<b>798</b>	<b>479</b>	811	471	32	788	486	<b>798</b>	<b>479</b>	811	471
437.leslie3d	32	<b>1390</b>	<b>216</b>	1386	217	1420	212	16	647	232	<b>651</b>	<b>231</b>	651	231
444.namd	32	723	355	739	347	<b>726</b>	<b>353</b>	32	710	361	716	358	<b>710</b>	<b>361</b>
447.dealII	32	502	729	484	757	<b>487</b>	<b>751</b>	32	502	729	484	757	<b>487</b>	<b>751</b>
450.soplex	32	1243	215	<b>1167</b>	<b>229</b>	1164	229	16	485	275	<b>482</b>	<b>277</b>	471	283
453.povray	32	286	595	<b>282</b>	<b>603</b>	282	604	32	243	700	245	696	<b>244</b>	<b>699</b>
454.calculix	32	<b>473</b>	<b>559</b>	474	557	472	559	32	<b>473</b>	<b>559</b>	474	557	472	559
459.GemsFDTD	32	<b>1650</b>	<b>206</b>	1647	206	1677	202	32	<b>1650</b>	<b>206</b>	1647	206	1677	202
465.tonto	32	672	468	<b>672</b>	<b>468</b>	678	464	32	<b>650</b>	<b>485</b>	651	484	648	486
470.lbm	32	1074	409	<b>1073</b>	<b>410</b>	1072	410	32	1074	409	<b>1073</b>	<b>410</b>	1072	410
481.wrf	32	939	381	<b>939</b>	<b>381</b>	937	381	32	<b>938</b>	<b>381</b>	925	386	939	381
482.sphinx3	32	<b>1839</b>	<b>339</b>	1842	339	1835	340	32	<b>1821</b>	<b>343</b>	1821	343	1820	343

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance  
 Memory Frequency set to Maximum Performance  
 Turbo Boost set to Enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 391**

PowerEdge M420 (Intel Xeon E5-2450, 2.10 GHz)

**SPECfp\_rate\_base2006 = 380**

**CPU2006 license:** 55

**Test date:** Mar-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Platform Notes (Continued)

C States/C1E set to Enabled

Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on HIFI-SPA-2P Wed Mar 21 03:09:46 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E5-2450 0 @ 2.10GHz  
2 "physical id"s (chips)  
32 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 8  
siblings : 16  
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7  
cache size : 20480 KB

From /proc/meminfo  
MemTotal: 49348648 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 11 (x86\_64)

From /etc/\*release\* /etc/\*version\*  
SuSE-release:  
SUSE Linux Enterprise Server 11 (x86\_64)  
VERSION = 11  
PATCHLEVEL = 2

uname -a:  
Linux HIFI-SPA-2P 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012  
(d73692b) x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 Mar 20 12:49 last=S

SPEC is set to: /root/CPU2006-1.2  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sdal ext3 87G 36G 48G 43% /

Additional information from dmidecode:

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450, 2.10 GHz)

**SPECfp\_rate2006 = 391**

CPU2006 license: 55

Test date: Mar-2012

Test sponsor: Dell Inc.

Hardware Availability: May-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450, 2.10 GHz)

**SPECfp\_rate2006 = 391**

**SPECfp\_rate\_base2006 = 380**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2012

**Hardware Availability:** May-2012

**Software Availability:** Feb-2012

## Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

482.sphinx3: 

```
icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: 

```
icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

410.bwaves: 

```
-DSPEC_CPU_LP64
```

  
416.gamess: 

```
-DSPEC_CPU_LP64
```

  
433.milc: 

```
-DSPEC_CPU_LP64
```

  
434.zeusmp: 

```
-DSPEC_CPU_LP64
```

  
435.gromacs: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
436.cactusADM: 

```
-DSPEC_CPU_LP64 -nofor_main
```

  
437.leslie3d: 

```
-DSPEC_CPU_LP64
```

  
444.namd: 

```
-DSPEC_CPU_LP64
```

  
447.dealII: 

```
-DSPEC_CPU_LP64
```

  
453.povray: 

```
-DSPEC_CPU_LP64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M420 (Intel Xeon E5-2450, 2.10 GHz)

**SPECfp\_rate2006 = 391**

**SPECfp\_rate\_base2006 = 380**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2012

**Hardware Availability:** May-2012

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

```
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32
447.dealII: basepeak = yes
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -static
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep- -static
434.zeusmp: basepeak = yes
437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
459.GemsFDTD: basepeak = yes
465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
           -inline-calloc -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 391**

PowerEdge M420 (Intel Xeon E5-2450, 2.10 GHz)

**SPECfp\_rate\_base2006 = 380**

**CPU2006 license:** 55

**Test date:** Mar-2012

**Test sponsor:** Dell Inc.

**Hardware Availability:** May-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -static -auto-ilp32 -opt-mem-layout-trans=3
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
          -opt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 05:24:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 June 2012.