



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

**SPECint<sup>®</sup>2006 = 59.9**

Express5800/R120e-2M (Intel Xeon E5-2697 v2)

**SPECint\_base2006 = 55.3**

CPU2006 license: 9006


Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

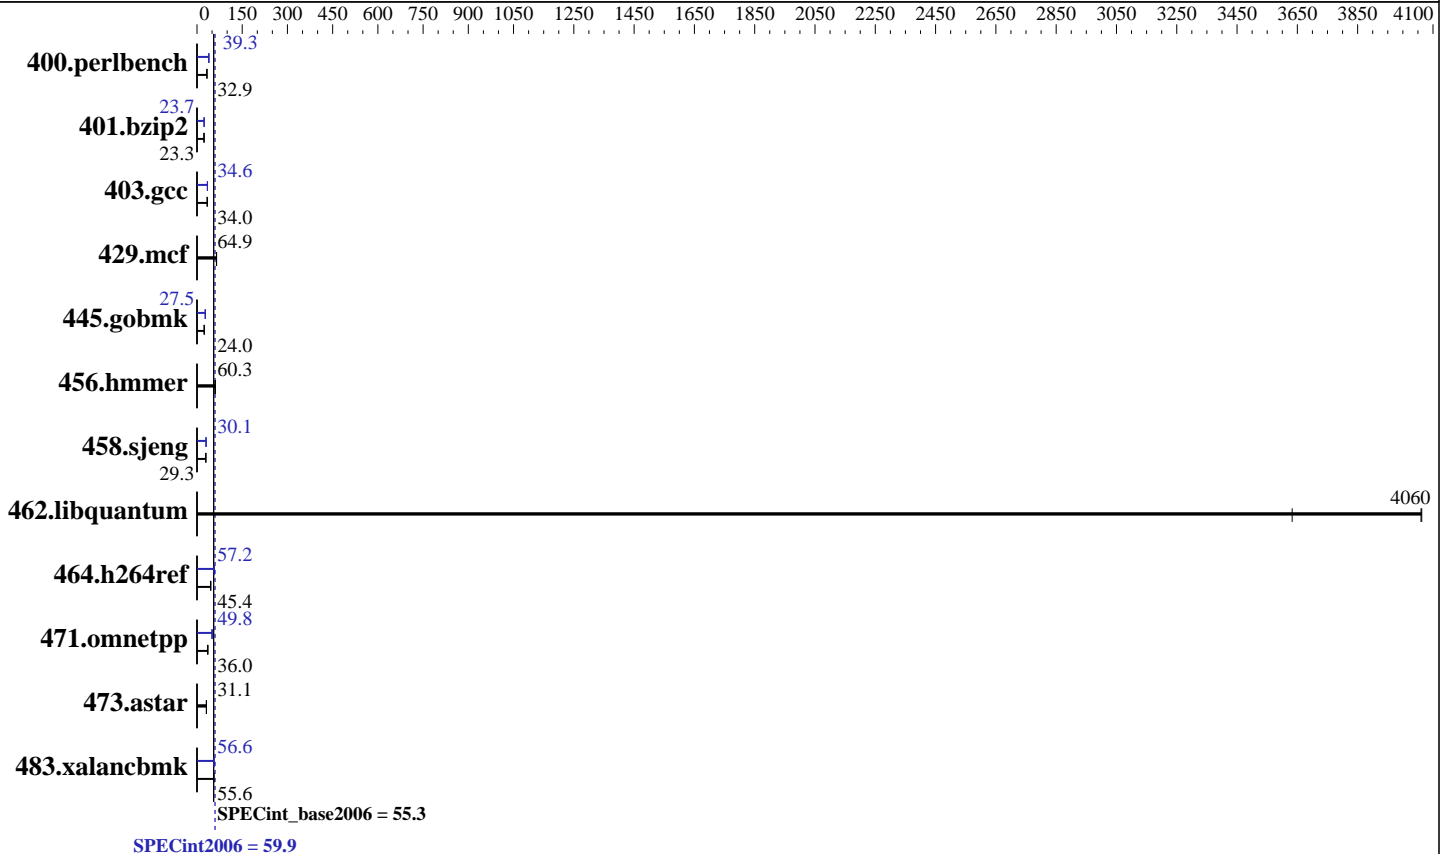

### Hardware

CPU Name: Intel Xeon E5-2697 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Kernel 2.6.32-358.18.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint2006 = **59.9**

Express5800/R120e-2M (Intel Xeon E5-2697 v2)

SPECint\_base2006 = **55.3**

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	297	32.9	<u>297</u>	<u>32.9</u>	297	32.9	249	39.3	249	39.2	<u>249</u>	<u>39.3</u>
401.bzip2	<u>413</u>	<u>23.3</u>	414	23.3	413	23.3	407	23.7	408	23.7	<u>407</u>	<u>23.7</u>
403.gcc	237	34.0	237	33.9	<u>237</u>	<u>34.0</u>	232	34.7	<u>233</u>	<u>34.6</u>	233	34.6
429.mcf	140	64.9	142	64.4	<u>141</u>	<u>64.9</u>	140	64.9	142	64.4	<u>141</u>	<u>64.9</u>
445.gobmk	437	24.0	438	24.0	<u>438</u>	<u>24.0</u>	382	27.5	<u>382</u>	<u>27.5</u>	382	27.4
456.hammer	154	60.6	<u>155</u>	<u>60.3</u>	156	59.9	154	60.6	<u>155</u>	<u>60.3</u>	156	59.9
458.sjeng	413	29.3	414	29.3	<u>414</u>	<u>29.3</u>	<u>402</u>	<u>30.1</u>	402	30.1	402	30.1
462.libquantum	5.10	4060	5.70	3630	<u>5.10</u>	<u>4060</u>	5.10	4060	5.70	3630	<u>5.10</u>	<u>4060</u>
464.h264ref	486	45.6	488	45.4	<u>487</u>	<u>45.4</u>	387	57.2	388	57.1	<u>387</u>	<u>57.2</u>
471.omnetpp	<u>173</u>	<u>36.0</u>	173	36.2	180	34.7	126	49.7	124	50.5	<u>125</u>	<u>49.8</u>
473.astar	226	31.1	223	31.5	<u>225</u>	<u>31.1</u>	226	31.1	223	31.5	<u>225</u>	<u>31.1</u>
483.xalancbmk	124	55.9	<u>124</u>	<u>55.6</u>	124	55.6	122	56.4	<u>122</u>	<u>56.6</u>	122	56.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "24"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

The Express5800/R120e-1M and

the Express5800/R120e-2M models are electronically equivalent.

The results have been measured on the Express5800/R120e-1M model.

## Base Compiler Invocation

C benchmarks:

icc -m64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 2



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 59.9

Express5800/R120e-2M (Intel Xeon E5-2697 v2)

SPECint\_base2006 = 55.3

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32  
C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
-L/sh -lsmartheap64

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m64  
400.perlbench: icc -m32  
445.gobmk: icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

**SPECint2006 = 59.9**

**Express5800/R120e-2M (Intel Xeon E5-2697 v2)**

**SPECint\_base2006 = 55.3**

**CPU2006 license:** 9006

**Test date:** Oct-2013

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2013

**Tested by:** NEC Corporation

**Software Availability:** Sep-2013

## Peak Compiler Invocation (Continued)

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
 -ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias

456.hmmer: basepeak = yes

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint2006 = 59.9

Express5800/R120e-2M (Intel Xeon E5-2697 v2)

SPECint\_base2006 = 55.3

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:21:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 November 2013.