



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 HD
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECint®2006 = 50.6

SPECint_base2006 = 47.8

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

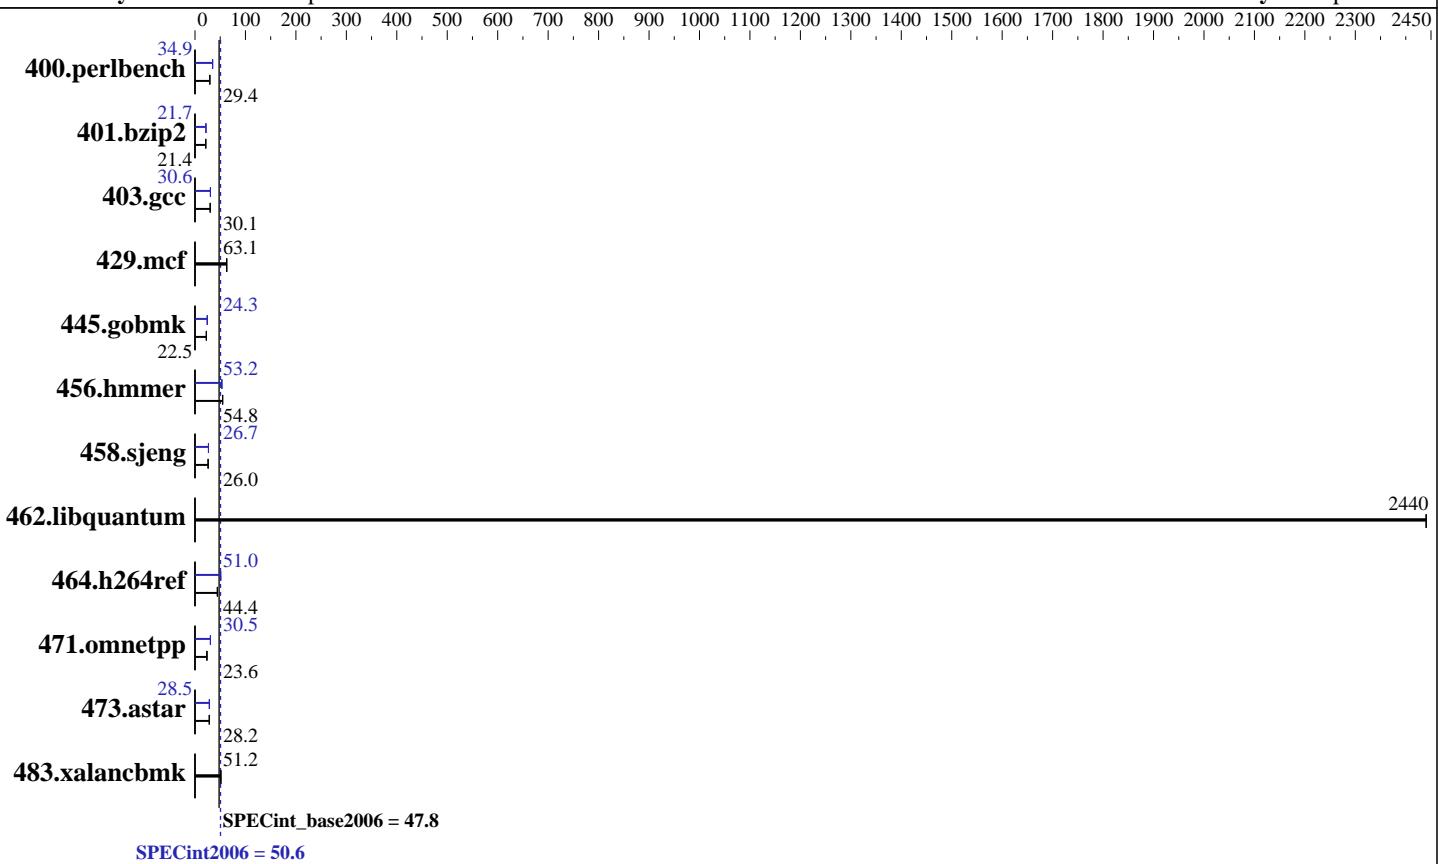

| Hardware | | Software |
|----------------------|--|--|
| CPU Name: | Intel Xeon E5-2630 v2 | Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago) |
| CPU Characteristics: | Intel Turbo Boost Technology up to 3.10 GHz | Compiler: 2.6.32-358.el6.x86_64 |
| CPU MHz: | 2600 | C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux |
| FPU: | Integrated | Auto Parallel: Yes |
| CPU(s) enabled: | 12 cores, 2 chips, 6 cores/chip | File System: ext4 |
| CPU(s) orderable: | 1,2 chips | System State: Run level 3 (multi-user) |
| Primary Cache: | 32 KB I + 32 KB D on chip per core | Base Pointers: 32/64-bit |
| Secondary Cache: | 256 KB I+D on chip per core | Peak Pointers: 32/64-bit |
| L3 Cache: | 15 MB I+D on chip per chip | Other Software: Microquill SmartHeap V10.0 |
| Other Cache: | None | |
| Memory: | 256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1600 MHz) | |
| Disk Subsystem: | 1 x 400 GB SAS SSD, RAID 0 | |
| Other Hardware: | None | |



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 HD
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECint2006 = 50.6

SPECint_base2006 = 47.8

CPU2006 license: 11

Test date: Nov-2013

Test sponsor: IBM Corporation

Hardware Availability: Dec-2013

Tested by: IBM Corporation

Software Availability: Sep-2013

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|------------|-------------|------------|-------------|-------------|-------------|------------|-------------|------------|-------------|-------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 332 | 29.4 | 333 | 29.4 | 333 | 29.4 | 280 | 34.9 | 280 | 34.9 | 280 | 34.9 |
| 401.bzip2 | 452 | 21.4 | 452 | 21.4 | 452 | 21.4 | 445 | 21.7 | 445 | 21.7 | 445 | 21.7 |
| 403.gcc | 268 | 30.0 | 266 | 30.2 | 267 | 30.1 | 263 | 30.6 | 263 | 30.6 | 263 | 30.6 |
| 429.mcf | 145 | 63.1 | 146 | 62.4 | 145 | 63.1 | 145 | 63.1 | 146 | 62.4 | 145 | 63.1 |
| 445.gobmk | 467 | 22.5 | 467 | 22.5 | 467 | 22.5 | 431 | 24.3 | 431 | 24.3 | 431 | 24.3 |
| 456.hmmer | 170 | 54.8 | 170 | 54.8 | 170 | 54.9 | 176 | 52.9 | 175 | 53.4 | 175 | 53.2 |
| 458.sjeng | 465 | 26.0 | 465 | 26.0 | 465 | 26.0 | 454 | 26.7 | 454 | 26.7 | 454 | 26.7 |
| 462.libquantum | 8.49 | 2440 | 8.49 | 2440 | 8.49 | 2440 | 8.49 | 2440 | 8.49 | 2440 | 8.49 | 2440 |
| 464.h264ref | 499 | 44.4 | 499 | 44.4 | 500 | 44.3 | 434 | 51.0 | 436 | 50.8 | 434 | 51.0 |
| 471.omnetpp | 269 | 23.2 | 260 | 24.0 | 265 | 23.6 | 204 | 30.7 | 205 | 30.5 | 205 | 30.5 |
| 473.astar | 246 | 28.5 | 249 | 28.2 | 249 | 28.2 | 247 | 28.5 | 246 | 28.5 | 247 | 28.4 |
| 483.xalancbmk | 135 | 51.2 | 135 | 51.3 | 135 | 51.2 | 135 | 51.2 | 135 | 51.3 | 135 | 51.2 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode

Platform Notes

BIOS setting:

Operating Mode set to Maximum Performance

Hyper-Threading set to Disabled

Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191
running on x3650M4Plus Wed Nov 6 12:18:12 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) CPU E5-2630 v2 @ 2.60GHz
  2 "physical id"s (chips)
    12 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 HD
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECint2006 = 50.6

SPECint_base2006 = 47.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Platform Notes (Continued)

```
caution.)
cpu cores : 6
siblings : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      264655320 kB
HugePages_Total:      0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux x3650M4Plus 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 5 11:27

SPEC is set to: /home/SPECcpu-new
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/mapper/vg_x3650m4plus-lv_home
                  ext4    309G   201G   93G  69%  /home

Additional information from dmidecode:
BIOS IBM -[TESTBUILD-1.50]- 08/09/2013
Memory:
 8x Not Specified Not Specified
 16x Samsung M393B2G70QH0-CMA 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)
"Not Specified" memory information from dmidecode indicates unused DIMM slots.
The BIOS IBM -[TESTBUILD-1.50] is equivalent to production version [VVE134TUS-1.51]
```

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"
OMP_NUM_THREADS = "12"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 HD
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECint2006 = 50.6

SPECint_base2006 = 47.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

General Notes (Continued)

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

 -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

 -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs
 -L/sh -lsmartheap64

Base Other Flags

C benchmarks:

 403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 HD
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECint2006 = 50.6

SPECint_base2006 = 47.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

471.omnetpp: icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

403.gcc: -DSPEC_CPU_LP64

429.mcf: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

458.sjeng: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

473.astar: -DSPEC_CPU_LP64

483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 HD
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECint2006 = 50.6

SPECint_base2006 = 47.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

456.hmmr: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/sh -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4 HD
(Intel Xeon E5-2630 v2, 2.60 GHz)

SPECint2006 = 50.6

SPECint_base2006 = 47.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2013

Hardware Availability: Dec-2013

Software Availability: Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:33:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 December 2013.