



# SPEC® CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Sugon**

**SPECint\_rate2006 = 2530**

Sugon I840-G20 (Intel Xeon E7-8890 v3)

**SPECint\_rate\_base2006 = 2430**

**CPU2006 license:** 9046


**Test date:** Nov-2015

**Test sponsor:** Sugon

**Hardware Availability:** Sep-2015

**Tested by:** Sugon

**Software Availability:** Sep-2015

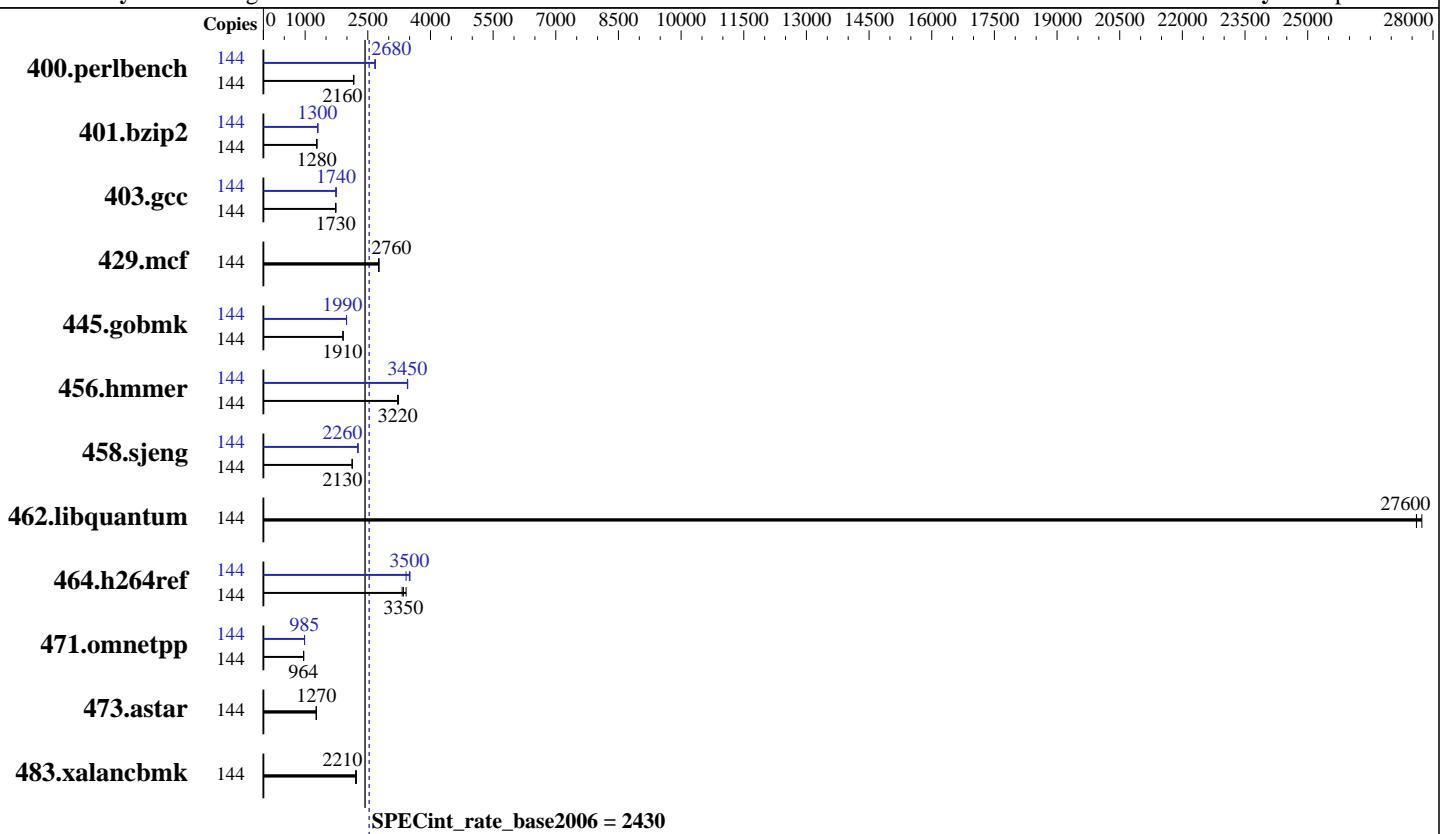

## Hardware

CPU Name: Intel Xeon E7-8890 v3  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 45 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)  
 Disk Subsystem: 4 x 250 GB SATA, RAID10  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64) 3.12.28-4-default  
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Sugon**

**SPECint\_rate2006 = 2530**

**Sugon I840-G20 (Intel Xeon E7-8890 v3)**

**SPECint\_rate\_base2006 = 2430**

**CPU2006 license:** 9046

**Test date:** Nov-2015

**Test sponsor:** Sugon

**Hardware Availability:** Sep-2015

**Tested by:** Sugon

**Software Availability:** Sep-2015

## Results Table

| Benchmark      | Base   |            |             |            |             |             |              | Peak   |             |             |            |             |            |              |
|----------------|--------|------------|-------------|------------|-------------|-------------|--------------|--------|-------------|-------------|------------|-------------|------------|--------------|
|                | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds     | Ratio        | Copies | Seconds     | Ratio       | Seconds    | Ratio       | Seconds    | Ratio        |
| 400.perlbench  | 144    | <b>650</b> | <b>2160</b> | 650        | 2160        | 652         | 2160         | 144    | <b>525</b>  | <b>2680</b> | 525        | 2680        | 527        | 2670         |
| 401.bzip2      | 144    | 1084       | 1280        | 1089       | 1280        | <b>1085</b> | <b>1280</b>  | 144    | <b>1070</b> | <b>1300</b> | 1070       | 1300        | 1063       | 1310         |
| 403.gcc        | 144    | 670        | 1730        | 668        | 1740        | <b>669</b>  | <b>1730</b>  | 144    | 670         | 1730        | <b>665</b> | <b>1740</b> | 665        | 1740         |
| 429.mcf        | 144    | <b>476</b> | <b>2760</b> | 474        | 2770        | 476         | 2760         | 144    | <b>476</b>  | <b>2760</b> | 474        | 2770        | 476        | 2760         |
| 445.gobmk      | 144    | 792        | 1910        | 792        | 1910        | <b>792</b>  | <b>1910</b>  | 144    | <b>759</b>  | <b>1990</b> | 759        | 1990        | 758        | 1990         |
| 456.hammer     | 144    | 418        | 3220        | 416        | 3230        | <b>418</b>  | <b>3220</b>  | 144    | 389         | 3450        | <b>389</b> | <b>3450</b> | 390        | 3450         |
| 458.sjeng      | 144    | 819        | 2130        | <b>819</b> | <b>2130</b> | 819         | 2130         | 144    | 769         | 2260        | <b>770</b> | <b>2260</b> | 770        | 2260         |
| 462.libquantum | 144    | 108        | 27700       | 108        | 27600       | <b>108</b>  | <b>27600</b> | 144    | 108         | 27700       | 108        | 27600       | <b>108</b> | <b>27600</b> |
| 464.h264ref    | 144    | 933        | 3420        | <b>951</b> | <b>3350</b> | 959         | 3320         | 144    | <b>912</b>  | <b>3500</b> | 933        | 3420        | 908        | 3510         |
| 471.omnetpp    | 144    | 936        | 962         | 934        | 964         | <b>934</b>  | <b>964</b>   | 144    | <b>913</b>  | <b>985</b>  | 914        | 984         | 912        | 987          |
| 473.astar      | 144    | <b>797</b> | <b>1270</b> | 796        | 1270        | 800         | 1260         | 144    | <b>797</b>  | <b>1270</b> | 796        | 1270        | 800        | 1260         |
| 483.xalancbmk  | 144    | 450        | 2210        | 446        | 2230        | <b>449</b>  | <b>2210</b>  | 144    | 450         | 2210        | 446        | 2230        | <b>449</b> | <b>2210</b>  |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
Set Power Technology to Custom  
Set Package C State limit C0/C1 state  
Set DDR speed to 1600 MHz  
Set Hyper-Threading to Enabled  
Baseboard Management Controller used to adjust the fan speed to performance mode  
Sysinfo program /home/cpu2006/config/sysinfo.rev6914  
\$Rev: 6914 \$ \$Date::: 2014-06-25 #\\$ e3fbb8667b5a285932ceab81e28219e1  
running on localhost Fri Nov 27 17:47:20 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) CPU E7-8890 v3 @ 2.50GHz  
4 "physical id"s (chips)

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 2530

Sugon I840-G20 (Intel Xeon E7-8890 v3)

SPECint\_rate\_base2006 = 2430

CPU2006 license: 9046

Test date: Nov-2015

Test sponsor: Sugon

Hardware Availability: Sep-2015

Tested by: Sugon

Software Availability: Sep-2015

## Platform Notes (Continued)

```
144 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 18
    siblings   : 36
    physical 0: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 1: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 2: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    physical 3: cores 0 1 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
    cache size : 46080 KB

From /proc/meminfo
MemTotal:      529304188 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12

From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12"
    VERSION_ID="12"
    PRETTY_NAME="SUSE Linux Enterprise Server 12"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
Linux localhost 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC 2014
(9879bd4) x86_64 x86_64 x86_64 GNU/Linux

run-level 5 Nov 27 17:41

SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  875G  414G  461G  48%  /home
Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program
reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to
hardware, firmware, and the "DMTF SMBIOS" standard.
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

**SPECint\_rate2006 = 2530**

Sugon I840-G20 (Intel Xeon E7-8890 v3)

**SPECint\_rate\_base2006 = 2430**

CPU2006 license: 9046

Test date: Nov-2015

Test sponsor: Sugon

Hardware Availability: Sep-2015

Tested by: Sugon

Software Availability: Sep-2015

## Platform Notes (Continued)

BIOS American Megatrends Inc. 1.01 08/26/2015

Memory:

32x Hynix HMA42GR7MFR4N-TFTD 16 GB 2 rank 2133 MHz, configured at 1600 MHz  
16x NO DIMM NO DIMM

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

icc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/compiler/lib/ia32\_lin

## Base Portability Flags

400.perlbench: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -D\_FILE\_OFFSET\_BITS=64  
403.gcc: -D\_FILE\_OFFSET\_BITS=64  
429.mcf: -D\_FILE\_OFFSET\_BITS=64  
445.gobmk: -D\_FILE\_OFFSET\_BITS=64  
456.hmmr: -D\_FILE\_OFFSET\_BITS=64  
458.sjeng: -D\_FILE\_OFFSET\_BITS=64  
462.libquantum: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX  
464.h264ref: -D\_FILE\_OFFSET\_BITS=64  
471.omnetpp: -D\_FILE\_OFFSET\_BITS=64  
473.astar: -D\_FILE\_OFFSET\_BITS=64  
483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

**Sugon**

**SPECint\_rate2006 = 2530**

**Sugon I840-G20 (Intel Xeon E7-8890 v3)**

**SPECint\_rate\_base2006 = 2430**

**CPU2006 license:** 9046

**Test date:** Nov-2015

**Test sponsor:** Sugon

**Hardware Availability:** Sep-2015

**Tested by:** Sugon

**Software Availability:** Sep-2015

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/home/cpu2006/sh -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

```
400.perlbench: icc -m64
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

## Peak Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

```
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
403.gcc: -D_FILE_OFFSET_BITS=64
```

```
429.mcf: -D_FILE_OFFSET_BITS=64
```

```
445.gobmk: -D_FILE_OFFSET_BITS=64
```

```
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
```

```
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

```
464.h264ref: -D_FILE_OFFSET_BITS=64
```

```
471.omnetpp: -D_FILE_OFFSET_BITS=64
```

```
473.astar: -D_FILE_OFFSET_BITS=64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 2530

Sugon I840-G20 (Intel Xeon E7-8890 v3)

SPECint\_rate\_base2006 = 2430

CPU2006 license: 9046

Test date: Nov-2015

Test sponsor: Sugon

Hardware Availability: Sep-2015

Tested by: Sugon

Software Availability: Sep-2015

## Peak Portability Flags (Continued)

483.xalancbmk: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch  
-auto-ilp32 -ansi-alias

403.gcc: -xCORE-AVX2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias  
-opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias  
-opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cpu2006/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Sugon

SPECint\_rate2006 = 2530

Sugon I840-G20 (Intel Xeon E7-8890 v3)

SPECint\_rate\_base2006 = 2430

CPU2006 license: 9046

Test date: Nov-2015

Test sponsor: Sugon

Hardware Availability: Sep-2015

Tested by: Sugon

Software Availability: Sep-2015

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-HSW-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Dec 15 16:46:17 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 15 December 2015.