



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_base = 896

SPECrate2017_fp_peak = 911

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

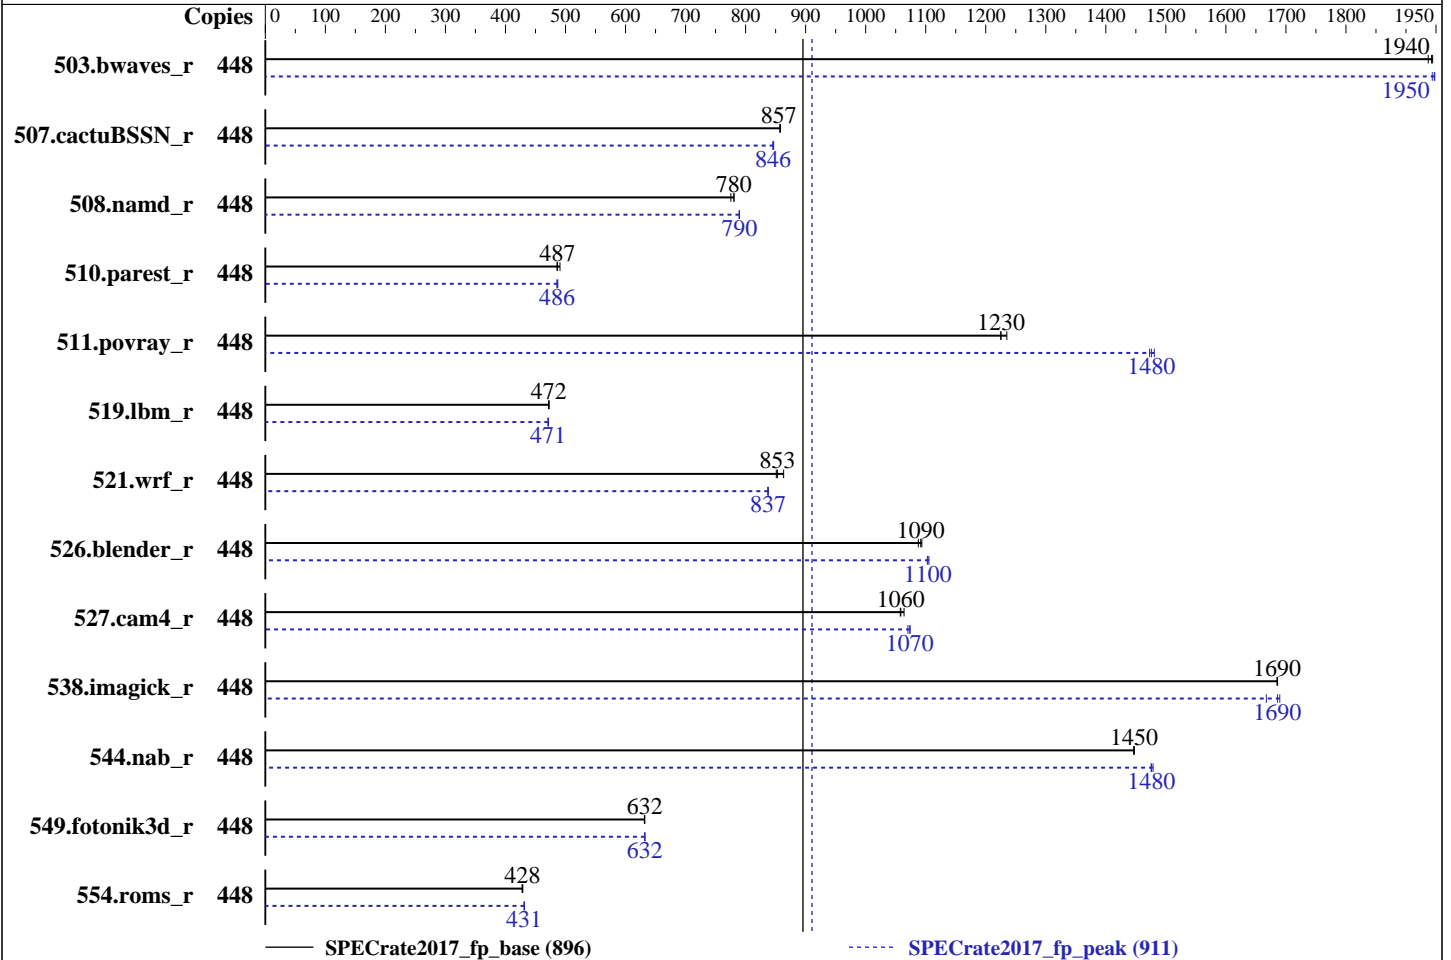

Hardware

CPU Name: Intel Xeon Platinum 8176M
 Max MHz.: 3800
 Nominal: 2100
 Enabled: 224 cores, 8 chips, 2 threads/core
 Orderable: 2,4,8 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2666V-R)
 Storage: 800 GB tmpfs
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86_64)
 Kernel 4.4.21-69-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
 Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran
 Compiler for Linux
 Parallel: No
 Firmware: Lenovo BIOS Version PSE105X 1.00 released Aug-2017
 File System: tmpfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_base = 896

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	448	2313	1940	2319	1940	2310	1940	448	2311	1940	2307	1950	2306	1950
507.cactuBSSN_r	448	662	857	661	858	661	857	448	671	845	670	847	671	846
508.namd_r	448	545	780	549	775	545	781	448	539	790	539	789	539	790
510.parest_r	448	2388	491	2408	487	2412	486	448	2411	486	2406	487	2413	486
511.povray_r	448	854	1220	854	1230	847	1240	448	709	1480	706	1480	710	1470
519.lbm_r	448	1001	472	999	472	999	473	448	1002	471	1002	471	1003	471
521.wrf_r	448	1162	863	1179	851	1177	853	448	1198	838	1199	837	1198	837
526.blender_r	448	627	1090	624	1090	625	1090	448	617	1110	618	1100	619	1100
527.cam4_r	448	740	1060	736	1060	741	1060	448	732	1070	730	1070	730	1070
538.imagick_r	448	661	1690	661	1690	661	1690	448	668	1670	661	1690	659	1690
544.nab_r	448	521	1450	521	1450	521	1450	448	510	1480	511	1480	511	1480
549.fotonik3d_r	448	2763	632	2765	631	2763	632	448	2761	632	2761	632	2764	632
554.roms_r	448	1660	429	1662	428	1664	428	448	1651	431	1651	431	1649	432

SPECrate2017_fp_base = **896**

SPECrate2017_fp_peak = **911**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Tmpfs filesystem can be set with:
mount -t tmpfs -o size=800g tmpfs /home
Process tuning setting:
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 896

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

General Notes (Continued)

Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

Platform Notes

BIOS configuration:
Choose Operating Mode set to Maximum Performance
SNC set to Enable
Hardware Prefetcher set to Disable
DCU Streamer Prefetcher set to Disable
MONITORMWAIT set to Enable
Execute Disable Bit set to Disable
Trusted Execution Technology set to Enable
Per Core Pstate set to Disable
XPT Prefetcher set to Enable
Stale AtoS set to Enable
LLC Deadline Alloc set to Enable
Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-boxi Wed Nov 29 20:18:01 2017

SUT (System Under Test) info as seen by some common utilities.
For more information on this section, see
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo
model name : Intel(R) Xeon(R) Platinum 8176M CPU @ 2.10GHz
8 "physical id"s (chips)
448 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_base = 896

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

```

28 29 30
physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

```

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 448
On-line CPU(s) list:   0-447
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              8
NUMA node(s):          16
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8176M CPU @ 2.10GHz
Stepping:               4
CPU MHz:                2095.082
BogoMIPS:               4190.16
Virtualization:        VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):     0-3,7-9,14-17,21-23,224-227,231-233,238-241,245-247
NUMA node1 CPU(s):     4-6,10-13,18-20,24-27,228-230,234-237,242-244,248-251
NUMA node2 CPU(s):     28-31,35-37,42-45,49-51,252-255,259-261,266-269,273-275
NUMA node3 CPU(s):     32-34,38-41,46-48,52-55,256-258,262-265,270-272,276-279
NUMA node4 CPU(s):     56-59,63-65,70-73,77-79,280-283,287-289,294-297,301-303
NUMA node5 CPU(s):     60-62,66-69,74-76,80-83,284-286,290-293,298-300,304-307
NUMA node6 CPU(s):     84-87,91-93,98-101,105-107,308-311,315-317,322-325,329-331
NUMA node7 CPU(s):     88-90,94-97,102-104,108-111,312-314,318-321,326-328,332-335
NUMA node8 CPU(s):     112-115,119-121,126-129,133-135,336-339,343-345,350-353,357-359
NUMA node9 CPU(s):     116-118,122-125,130-132,136-139,340-342,346-349,354-356,360-363
NUMA node10 CPU(s):    140-143,147-149,154-157,161-163,364-367,371-373,378-381,385-387
NUMA node11 CPU(s):    144-146,150-153,158-160,164-167,368-370,374-377,382-384,388-391
NUMA node12 CPU(s):

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 896

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

168-171,175-177,182-185,189-191,392-395,399-401,406-409,413-415

NUMA node13 CPU(s):

172-174,178-181,186-188,192-195,396-398,402-405,410-412,416-419

NUMA node14 CPU(s):

196-199,203-205,210-213,217-219,420-423,427-429,434-437,441-443

NUMA node15 CPU(s):

200-202,206-209,214-216,220-223,424-426,430-433,438-440,444-447

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 224 225 226 227 231 232 233 238 239 240 241 245 246 247

node 0 size: 192984 MB

node 0 free: 191867 MB

node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 228 229 230 234 235 236 237 242 243 244 248 249 250 251

node 1 size: 193528 MB

node 1 free: 192986 MB

node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 252 253 254 255 259 260 261 266 267 268 269 273 274 275

node 2 size: 193528 MB

node 2 free: 193019 MB

node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 256 257 258 262 263 264 265 270 271 272 276 277 278 279

node 3 size: 193528 MB

node 3 free: 188407 MB

node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 280 281 282 283 287 288 289 294 295 296 297 301 302 303

node 4 size: 193528 MB

node 4 free: 191555 MB

node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 284 285 286 290 291 292 293 298 299 300 304 305 306 307

node 5 size: 193528 MB

node 5 free: 193004 MB

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 896

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```

node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 308 309 310 311 315 316 317
322 323 324 325 329 330 331
node 6 size: 193528 MB
node 6 free: 193028 MB
node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 312 313 314 318 319 320
321 326 327 328 332 333 334 335
node 7 size: 193528 MB
node 7 free: 192998 MB
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135 336 337 338 339
343 344 345 350 351 352 353 357 358 359
node 8 size: 193528 MB
node 8 free: 193039 MB
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139 340 341 342 346
347 348 349 354 355 356 360 361 362 363
node 9 size: 193528 MB
node 9 free: 193036 MB
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163 364 365 366 367
371 372 373 378 379 380 381 385 386 387
node 10 size: 193528 MB
node 10 free: 193033 MB
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167 368 369 370 374
375 376 377 382 383 384 388 389 390 391
node 11 size: 193528 MB
node 11 free: 184539 MB
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191 392 393 394 395
399 400 401 406 407 408 409 413 414 415
node 12 size: 193528 MB
node 12 free: 192829 MB
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195 396 397 398 402
403 404 405 410 411 412 416 417 418 419
node 13 size: 193528 MB
node 13 free: 191302 MB
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219 420 421 422 423
427 428 429 434 435 436 437 441 442 443
node 14 size: 193528 MB
node 14 free: 193005 MB
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223 424 425 426 430
431 432 433 438 439 440 444 445 446 447
node 15 size: 193523 MB
node 15 free: 192985 MB
node distances:
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
0: 10 20 20 20 20 20 20 20 20 20 20 20 20 20 20 20
1: 20 10 20 20 20 20 20 20 20 20 20 20 20 20 20 20
2: 20 20 10 20 20 20 20 20 20 20 20 20 20 20 20 20
3: 20 20 20 10 20 20 20 20 20 20 20 20 20 20 20 20
4: 20 20 20 20 10 20 20 20 20 20 20 20 20 20 20 20

```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 896

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

5:	20	20	20	20	20	10	20	20	20	20	20	20	20	20	20	20
6:	20	20	20	20	20	20	10	20	20	20	20	20	20	20	20	20
7:	20	20	20	20	20	20	20	10	20	20	20	20	20	20	20	20
8:	20	20	20	20	20	20	20	20	10	20	20	20	20	20	20	20
9:	20	20	20	20	20	20	20	20	20	10	20	20	20	20	20	20
10:	20	20	20	20	20	20	20	20	20	20	10	20	20	20	20	20
11:	20	20	20	20	20	20	20	20	20	20	20	10	20	20	20	20
12:	20	20	20	20	20	20	20	20	20	20	20	20	10	20	20	20
13:	20	20	20	20	20	20	20	20	20	20	20	20	20	10	20	20
14:	20	20	20	20	20	20	20	20	20	20	20	20	20	20	10	20
15:	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	10

From /proc/meminfo

```
MemTotal:      3170207908 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.

os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

uname -a:

```
Linux linux-boxi 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Nov 29 19:52

SPEC is set to: /home/cpu2017.1.0.2.ic18.0

```
Filesystem      Type      Size  Used Avail Use% Mounted on
tmpfs           tmpfs    800G   11G  790G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_base = 896

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Platform Notes (Continued)

BIOS Lenovo -[PSE105X-1.00]- 08/17/2017

Memory:

96x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 896

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Compiler Version Notes (Continued)

CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactuBSSN_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 554.roms_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 521.wrf_r(base) 527.cam4_r(base)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_base = 896

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

CC 521.wrf_r(peak) 527.cam4_r(peak)

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 896

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Portability Flags (Continued)

521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_base = 896

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Other Flags (Continued)

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

SPECrate2017_fp_base = 896

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8176M)

SPECrate2017_fp_base = 896

SPECrate2017_fp_peak = 911

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-29 07:18:01-0500.

Report generated on 2018-10-31 14:21:25 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.