



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017


Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

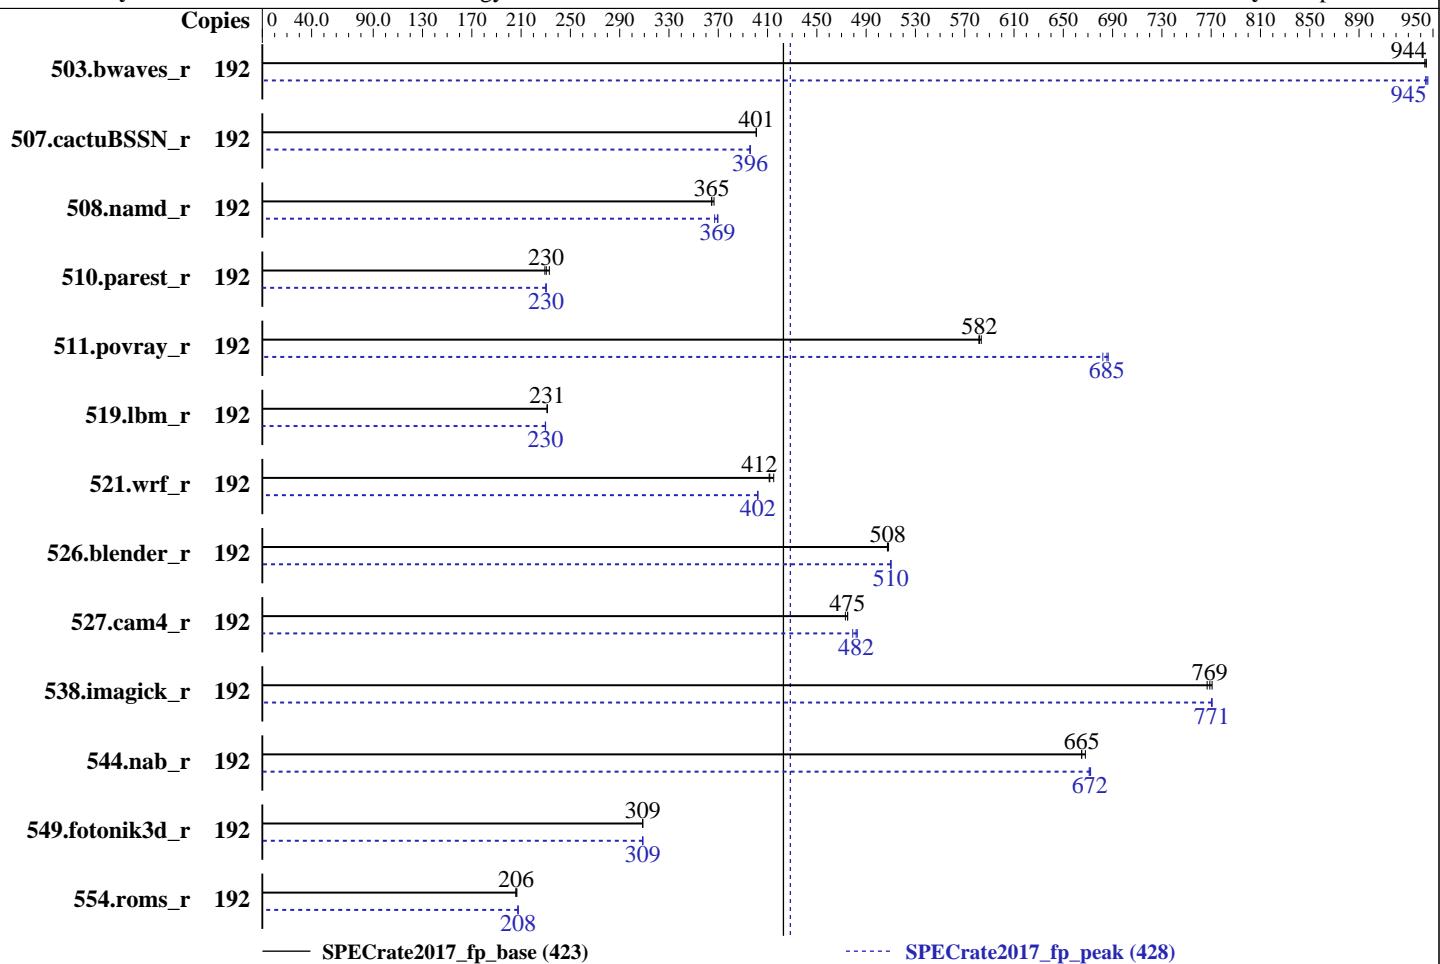

— SPECrate2017_fp_base (423)

- - - SPECrate2017_fp_peak (428)

Hardware

CPU Name: Intel Xeon Platinum 8160T
Max MHz.: 3700
Nominal: 2100
Enabled: 96 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)
Storage: 800 GB tmpfs
Other: None

OS:

SUSE Linux Enterprise Server 12 SP2 (x86_64)

Kernel 4.4.21-69-default

Compiler: C/C++: Version 18.0.0.128 of Intel C/C++

Compiler for Linux;

Fortran: Version 18.0.0.128 of Intel Fortran

Compiler for Linux

Parallel: No

Firmware: Lenovo BIOS Version PSE103K 1.00 released Jun-2017

File System: tmpfs

System State: Run level 3 (multi-user)

Base Pointers: 64-bit

Peak Pointers: 64-bit

Other: None

Software



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	192	2041	943	2038	945	2039	944	192	2036	946	2037	945	2040	944		
507.cactusBSSN_r	192	606	401	606	401	606	401	192	614	396	614	396	614	396		
508.namd_r	192	498	367	500	365	500	365	192	497	367	493	370	494	369		
510.parest_r	192	2156	233	2179	230	2190	229	192	2183	230	2182	230	2181	230		
511.povray_r	192	771	581	768	583	770	582	192	654	685	657	682	653	686		
519.lbm_r	192	875	231	875	231	875	231	192	881	230	881	230	881	230		
521.wrf_r	192	1036	415	1046	411	1044	412	192	1070	402	1070	402	1069	402		
526.blender_r	192	576	508	575	508	576	507	192	573	510	573	510	573	510		
527.cam4_r	192	707	475	710	473	707	475	192	696	483	701	479	697	482		
538.imagick_r	192	620	771	621	769	623	767	192	620	771	620	771	620	770		
544.nab_r	192	484	668	486	665	486	665	192	481	672	481	672	482	671		
549.fotonik3d_r	192	2424	309	2424	309	2424	309	192	2425	309	2424	309	2423	309		
554.roms_r	192	1477	207	1483	206	1481	206	192	1471	207	1470	208	1469	208		

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Tmpfs filesystem can be set with:

```
mount -t tmpfs -o size=800g tmpfs /home
```

Process tuning setting:

```
echo 50000 > /proc/sys/kernel/sched_cfs_bandwidth_slice_us
echo 240000000 > /proc/sys/kernel/sched_latency_ns
echo 5000000 > /proc/sys/kernel/sched_migration_cost_ns
echo 100000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 150000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
echo 0 > /proc/sys/kernel/numa_balancing
```

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017.1.0.2.ic18.0/lib/ia32:/home/cpu2017.1.0.2.ic18.0/lib/intel64"
```

```
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/cpu2017.1.0.2.ic18.0/je5.0.1-32:/home/cpu2017.1.0.2.ic18.0/je5.0.1-64"
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

General Notes (Continued)

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance

SNC set to Enable

Hardware Prefetcher set to Disable

MONITORWAIT set to Enable

Execute Disable Bit set to Disable

Intel Virtualization Technology set to Disable

DCA set to Enable

XPT Prefetcher set to Enable

Sysinfo program /home/cpu2017.1.0.2.ic18.0/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-uyxw Thu Nov 30 10:26:58 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8160T CPU @ 2.10GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 192

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8160T CPU @ 2.10GHz
Stepping: 4
CPU MHz: 2095.088
BogoMIPS: 4190.17
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143
NUMA node4 CPU(s): 48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164
NUMA node5 CPU(s): 51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167
NUMA node6 CPU(s): 72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188
NUMA node7 CPU(s): 75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc

/proc/cpuinfo cache data
cache size : 33792 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116
node 0 size: 192979 MB
node 0 free: 192353 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118 119
node 1 size: 193521 MB

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```
node 1 free: 192755 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
138 139 140
node 2 size: 193521 MB
node 2 free: 184493 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 193521 MB
node 3 free: 192928 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
162 163 164
node 4 size: 193521 MB
node 4 free: 192973 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
165 166 167
node 5 size: 193521 MB
node 5 free: 192935 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
186 187 188
node 6 size: 193521 MB
node 6 free: 187982 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
189 190 191
node 7 size: 193516 MB
node 7 free: 192925 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
  6: 21  21  21  21  21  21  10  11
  7: 21  21  21  21  21  21  11  10
```

From /proc/meminfo

```
MemTotal:      1584766288 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Platform Notes (Continued)

```
# Please check /etc/os-release for details about this release.  
os-release:  
  NAME="SLES"  
  VERSION="12-SP2"  
  VERSION_ID="12.2"  
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"  
  ID="sles"  
  ANSI_COLOR="0;32"  
  CPE_NAME="cpe:/o:suse:sles:12:sp2"  
  
uname -a:  
  Linux linux-uyxw 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67)  
  x86_64 x86_64 x86_64 GNU/Linux  
  
run-level 3 Nov 30 10:22  
  
SPEC is set to: /home/cpu2017.1.0.2.ic18.0  
Filesystem      Type   Size  Used Avail Use% Mounted on  
tmpfs          tmpfs   800G   11G   790G   2% /home  
  
Additional information from dmidecode follows.  WARNING: Use caution when you interpret  
this section. The 'dmidecode' program reads system data which is "intended to allow  
hardware to be accurately determined", but the intent may not be met, as there are  
frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
BIOS Lenovo -[PSE103K-1.00]- 06/19/2017  
Memory:  
  48x NO DIMM NO DIMM  
  48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666  
  
(End of data from sysinfo program)
```

Compiler Version Notes

```
=====  
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)  
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----  
=====  
CC 519.lbm_r(peak) 544.nab_r(peak)  
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Compiler Version Notes (Continued)

=====
CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(base) 526.blender_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CC 511.povray_r(peak) 526.blender_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactubSSN_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 507.cactubSSN_r(peak)

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Compiler Version Notes (Continued)

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

===== FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base) =====

----- ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

----- FC 554.roms_r(peak)

----- ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

===== CC 521.wrf_r(base) 527.cam4_r(base) =====

----- ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

===== CC 521.wrf_r(peak) 527.cam4_r(peak) =====

----- ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

iforticc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Base Portability Flags

503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11
```

Benchmarks using both C and C++:

```
-m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11
```

Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpcicc

Benchmarks using Fortran, C, and C++:

icpciccifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: -xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Nov-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

549.fotonik3d_r: Same as 503.bwaves_r

554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR950
(2.10 GHz, Intel Xeon Platinum 8160T)

SPECrate2017_fp_base = 423

SPECrate2017_fp_peak = 428

CPU2017 License: 9017

Test Date: Nov-2017

Test Sponsor: Lenovo Global Technology

Hardware Availability: Sep-2017

Tested by: Lenovo Global Technology

Software Availability: Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-SKL-A.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2017-11-29 21:26:57-0500.

Report generated on 2018-10-31 13:20:21 by CPU2017 PDF formatter v6067.

Originally published on 2017-12-26.