



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## M Computers s.r.o.


HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 4204  
Test Sponsor: M Computers s.r.o.  
Tested by: M Computers s.r.o.

Test Date: Dec-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

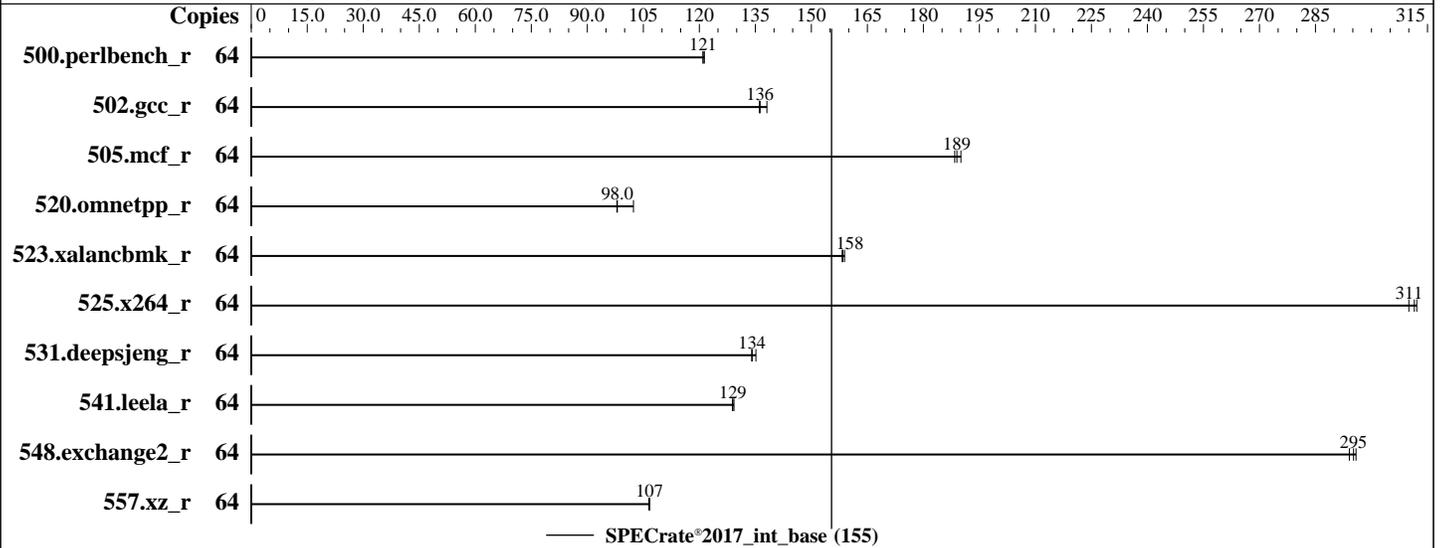

### Hardware

CPU Name: Intel Xeon Gold 6130  
Max MHz: 3700  
Nominal: 2100  
Enabled: 32 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 22 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2666V-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.21-69-default  
Compiler: C/C++: Version 18.0.1 of Intel C/C++ Compiler for Linux;  
Fortran: Version 18.0.1 of Intel Fortran Compiler for Linux  
Parallel: No  
Firmware: Intel Version SE5C620.86B.00.01.0009.101920170742 released Oct-2017  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: jemalloc: jemalloc memory allocator library V5.0.1;  
jemalloc: configured and built at default for 32bit (i686) and 64bit (x86\_64) targets;  
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;  
jemalloc: sources available from jemalloc.net or releases  
Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## M Computers s.r.o.

HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 4204  
Test Sponsor: M Computers s.r.o.  
Tested by: M Computers s.r.o.

Test Date: Dec-2017  
Hardware Availability: Oct-2017  
Software Availability: Sep-2017

### Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	64	840	121	842	121	<b>842</b>	<b>121</b>							
502.gcc_r	64	656	138	<b>665</b>	<b>136</b>	666	136							
505.mcf_r	64	544	190	<b>547</b>	<b>189</b>	549	188							
520.omnetpp_r	64	820	102	<b>856</b>	<b>98.0</b>	857	97.9							
523.xalancbmk_r	64	425	159	427	158	<b>427</b>	<b>158</b>							
525.x264_r	64	<b>360</b>	<b>311</b>	359	312	361	310							
531.deepsjeng_r	64	543	135	547	134	<b>547</b>	<b>134</b>							
541.leela_r	64	<b>822</b>	<b>129</b>	823	129	820	129							
548.exchange2_r	64	567	296	<b>568</b>	<b>295</b>	570	294							
557.xz_r	64	649	106	648	107	<b>648</b>	<b>107</b>							

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

### Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

### General Notes

```
Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "$/opt/intel/compilers_and_libraries/linux/lib/ia32_lin
:$/opt/intel/compilers_and_libraries/linux/lib/intel64_lin"
Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4
No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.
No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 4204  
**Test Sponsor:** M Computers s.r.o.  
**Tested by:** M Computers s.r.o.

**Test Date:** Dec-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## General Notes (Continued)

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS Configuration:  
Patrol Scrub=Disabled  
CPU and Power Performance Policy=Performance  
Set Fan Profile=Performance  
Sysinfo program /spec2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on taborlin2 Fri Dec 29 06:45:26 2017

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz  
2 "physical id"s (chips)  
64 "processors"  
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
cpu cores : 16  
siblings : 32  
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15

From lscpu:  
Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 64  
On-line CPU(s) list: 0-63

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## M Computers s.r.o.

HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 4204  
**Test Sponsor:** M Computers s.r.o.  
**Tested by:** M Computers s.r.o.

**Test Date:** Dec-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

### Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     16
Socket(s):               2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6130 CPU @ 2.10GHz
Stepping:               4
CPU MHz:                1000.000
CPU max MHz:            2101.0000
CPU min MHz:            1000.0000
BogoMIPS:               4190.16
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               22528K
NUMA node0 CPU(s):     0-3,8-11,32-35,40-43
NUMA node1 CPU(s):     4-7,12-15,36-39,44-47
NUMA node2 CPU(s):     16-19,24-27,48-51,56-59
NUMA node3 CPU(s):     20-23,28-31,52-55,60-63
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 cqm_llc cqm_occup_llc

```

```

/proc/cpuinfo cache data
cache size : 22528 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 8 9 10 11 32 33 34 35 40 41 42 43
node 0 size: 95174 MB
node 0 free: 87650 MB
node 1 cpus: 4 5 6 7 12 13 14 15 36 37 38 39 44 45 46 47
node 1 size: 96753 MB
node 1 free: 90963 MB
node 2 cpus: 16 17 18 19 24 25 26 27 48 49 50 51 56 57 58 59
node 2 size: 96753 MB
node 2 free: 91052 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 4204  
**Test Sponsor:** M Computers s.r.o.  
**Tested by:** M Computers s.r.o.

**Test Date:** Dec-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

```
node 3 cpus: 20 21 22 23 28 29 30 31 52 53 54 55 60 61 62 63
node 3 size: 96614 MB
node 3 free: 90989 MB
node distances:
node 0 1 2 3
0: 10 11 21 21
1: 11 10 21 21
2: 21 21 10 11
3: 21 21 11 10
```

```
From /proc/meminfo
MemTotal: 394542900 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux taborlin2 4.4.21-69-default #1 SMP Tue Oct 25 10:58:20 UTC 2016 (9464f67) x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 28 11:10
```

```
SPEC is set to: /spec2017
Filesystem Type Size Used Avail Use% Mounted on
/dev/sdal xfs 400G 67G 334G 17% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 4204  
**Test Sponsor:** M Computers s.r.o.  
**Tested by:** M Computers s.r.o.

**Test Date:** Dec-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
BIOS Intel Corporation SE5C620.86B.00.01.0009.101920170742 10/19/2017

Memory:  
24x Samsung M393A2K43BB1-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)

-----  
icc (ICC) 18.0.1 20171018  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbnk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

-----  
icpc (ICC) 18.0.1 20171018  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====  
Fortran | 548.exchange2\_r(base)

-----  
ifort (IFORT) 18.0.1 20171018  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 4204  
**Test Sponsor:** M Computers s.r.o.  
**Tested by:** M Computers s.r.o.

**Test Date:** Dec-2017  
**Hardware Availability:** Oct-2017  
**Software Availability:** Sep-2017

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

### C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

### Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Base Other Flags

### C benchmarks:

```
-m64 -std=c11
```

### C++ benchmarks:

```
-m64
```

### Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/MComputers-Platform-Settings-SKL-revA.html>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

**M Computers s.r.o.**

HPC S2600WFT  
(2.10 GHz, Intel Xeon Gold 6130)

SPECrate®2017\_int\_base = 155

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 4204

**Test Sponsor:** M Computers s.r.o.

**Tested by:** M Computers s.r.o.

**Test Date:** Dec-2017

**Hardware Availability:** Oct-2017

**Software Availability:** Sep-2017

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/MComputers-Platform-Settings-SKL-revA.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.2 on 2017-12-29 00:45:25-0500.

Report generated on 2020-02-04 11:55:44 by CPU2017 PDF formatter v6255.

Originally published on 2018-02-28.