



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

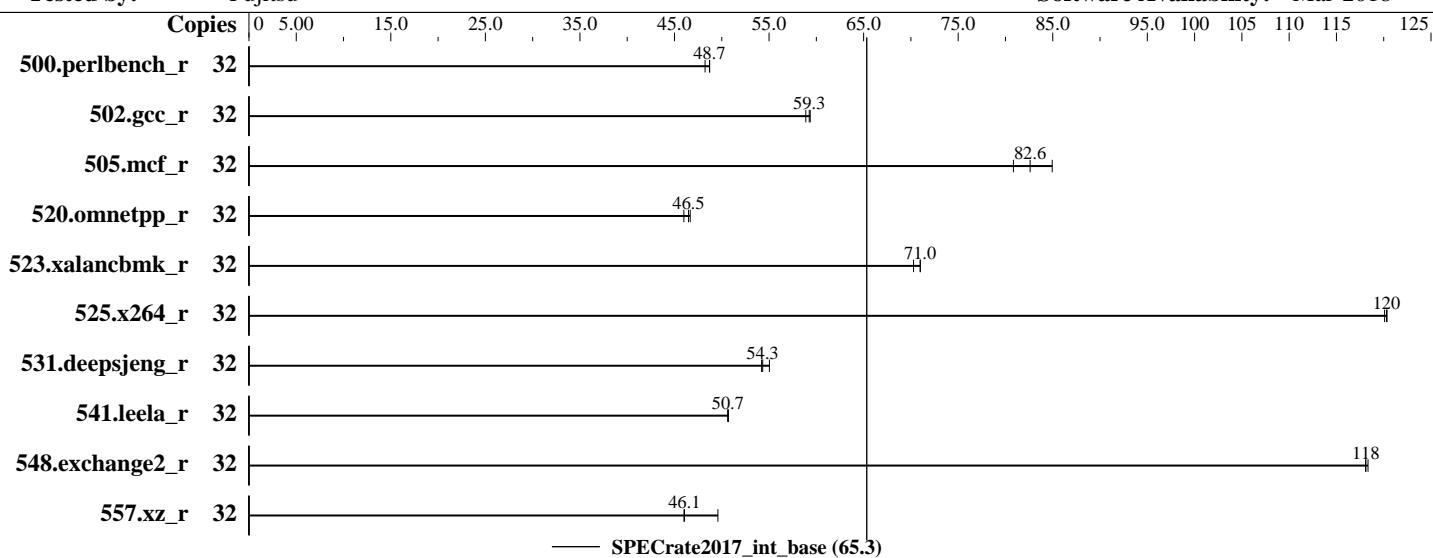

Hardware

CPU Name: Intel Xeon Silver 4108
Max MHz.: 3000
Nominal: 1800
Enabled: 16 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 11 MB I+D on chip per chip
Other: None
Memory: 192 GB (12 x 16 GB 2Rx4 PC4-2666V-R, running at 2400)
Storage: 1 x SATA SSD, 960 GB
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP2 4.4.114-92.64-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
Parallel: No
Firmware: Fujitsu BIOS Version V1.0.0.0 R1.27.0 for D3853-A1x. Released Mar-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	1056	48.2	1046	48.7	1046	48.7							
502.gcc_r	32	765	59.3	763	59.4	769	58.9							
505.mcf_r	32	609	84.9	640	80.8	626	82.6							
520.omnetpp_r	32	913	46.0	903	46.5	900	46.7							
523.xalancbmk_r	32	476	71.0	481	70.3	476	71.0							
525.x264_r	32	466	120	466	120	467	120							
531.deepsjeng_r	32	666	55.0	675	54.3	676	54.2							
541.leela_r	32	1047	50.6	1046	50.7	1045	50.7							
548.exchange2_r	32	710	118	710	118	708	118							
557.xz_r	32	697	49.6	751	46.0	750	46.1							

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-31
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Process tuning settings:
echo 0 > /proc/sys/kernel/numa_balancing
echo 10000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 15000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017/lib/ia32:/home/Benchmark/speccpu2017/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/Benchmark/speccpu2017/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

General Notes (Continued)

memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;

jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;

jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Intel Virtualization Technology = Disabled

Power Technology = Custom

HWPM Support = Disabled

Uncore Frequency Scaling = Disabled

Sub NUMA Clustering = Disabled

Stale AtoS = Enabled

LLC dead line alloc = Disabled

Sysinfo program /home/Benchmark/speccpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on CX2550M4 Tue Apr 17 17:06:56 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4108 CPU @ 1.80GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 7  
physical 1: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Byte Order:            Little Endian  
CPU(s):                32  
On-line CPU(s) list:  0-31  
Thread(s) per core:   2  
Core(s) per socket:    8  
Socket(s):             2  
NUMA node(s):          2  
Vendor ID:             GenuineIntel  
CPU family:            6  
Model:                 85  
Model name:            Intel(R) Xeon(R) Silver 4108 CPU @ 1.80GHz  
Stepping:               4  
CPU MHz:               1801.000  
CPU max MHz:          1801.0000  
CPU min MHz:          800.0000  
BogoMIPS:              3591.55  
Virtualization:        VT-x  
L1d cache:             32K  
L1i cache:             32K  
L2 cache:              1024K  
L3 cache:              11264K  
NUMA node0 CPU(s):    0-7,16-23  
NUMA node1 CPU(s):    8-15,24-31  
Flags:     fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc  
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg  
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes  
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts  
dtherm intel_pt rsb_ctxtsw spec_ctrl retrpline kaiser tpr_shadow vnmi flexpriority  
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx  
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt  
xsavec xgetbv1 cqmq_llc cqmq_occrap_llc
```

```
/proc/cpuinfo cache data  
cache size : 11264 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 16 17 18 19 20 21 22 23
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

Platform Notes (Continued)

```
node 0 size: 96321 MB
node 0 free: 95997 MB
node 1 cpus: 8 9 10 11 12 13 14 15 24 25 26 27 28 29 30 31
node 1 size: 96645 MB
node 1 free: 96361 MB
node distances:
node    0    1
 0:   10   21
 1:   21   10

From /proc/meminfo
  MemTotal:         197598076 kB
  HugePages_Total:          0
  Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 12 SP2

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"

uname -a:
  Linux CX2550M4 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 17 17:03

SPEC is set to: /home/Benchmark/speccpu2017
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda4        xfs   852G   17G  836G   2% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU V1.0.0.0 R1.27.0 for D3853-Alx 03/15/2018

Memory:

12x Hynix HMA42GR7BJR4N-VK 16 GB 2 rank 2666, configured at 2400
4x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)
557.xz_r(base)

=====
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
541.leela_r(base)

=====
icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====
FC 548.exchange2_r(base)

=====
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Apr-2018

Hardware Availability: Dec-2017

Software Availability: Mar-2018

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

C++ benchmarks:

```
-m64
```

Fortran benchmarks:

```
-m64
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY CX2550 M4, Intel Xeon Silver 4108,
1.80GHz

SPECrate2017_int_base = 65.3

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Apr-2018

Test Sponsor: Fujitsu

Hardware Availability: Dec-2017

Tested by: Fujitsu

Software Availability: Mar-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-04-17 04:06:55-0400.

Report generated on 2018-10-31 17:16:05 by CPU2017 PDF formatter v6067.

Originally published on 2018-05-29.