



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 593

### Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175


Test Date: Jun-2018

Test Sponsor: Huawei

Hardware Availability: Jul-2018

Tested by: Huawei

Software Availability: Mar-2018

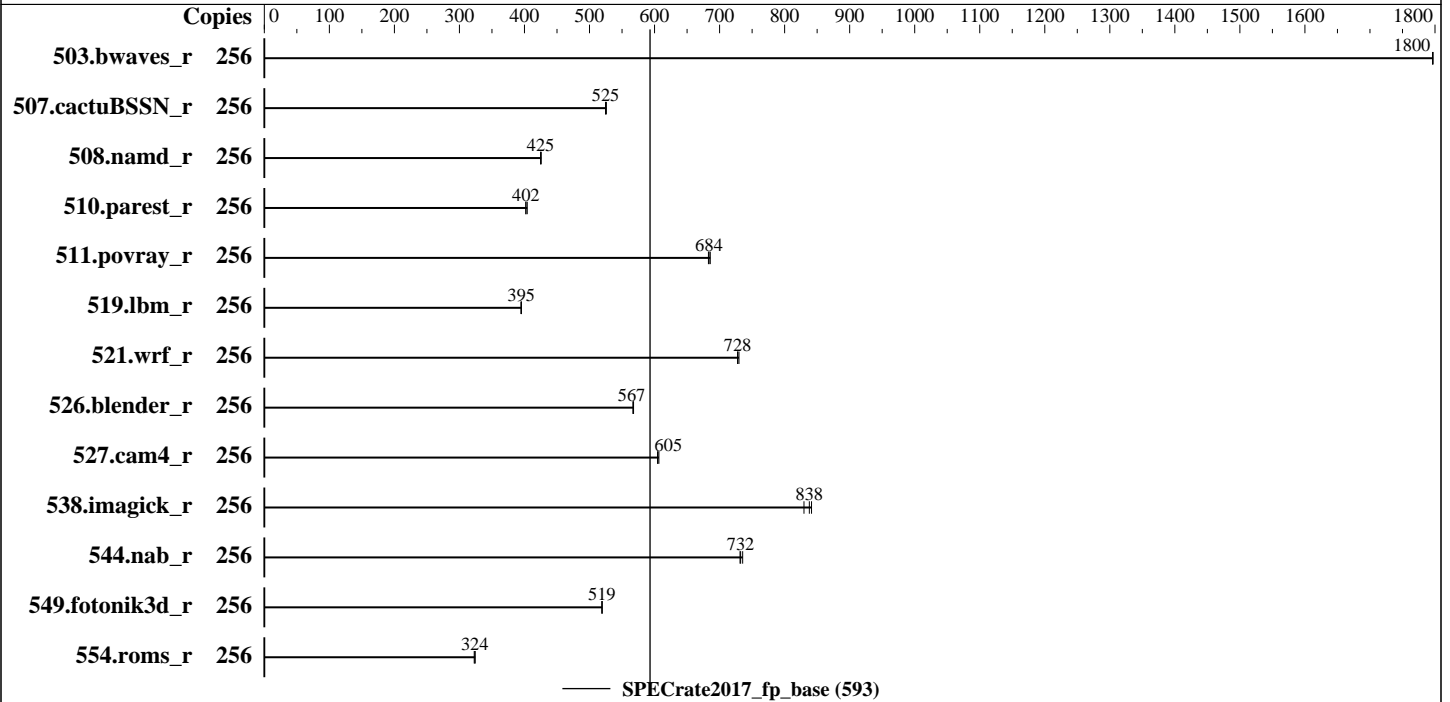

### Hardware

CPU Name: Intel Xeon Platinum 8153  
 Max MHz.: 2800  
 Nominal: 2000  
 Enabled: 128 cores, 8 chips, 2 threads/core  
 Orderable: 2,4,8 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 22 MB I+D on chip per chip  
 Other: None  
 Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-2666V-R)  
 Storage: 2 x 900 GB SAS HDD 10K RPM, RAID 0  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP2  
 4.4.120-92.70-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 0.80 released Feb-2018  
 File System: ext4  
 System State: Run level 5 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 593

Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: Mar-2018

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	256	1429	1800	1429	1800	<b><u>1429</u></b>	<b><u>1800</u></b>							
507.cactuBSSN_r	256	616	526	618	525	<b><u>618</u></b>	<b><u>525</u></b>							
508.namd_r	256	<b><u>572</u></b>	<b><u>425</u></b>	573	425	571	426							
510.parest_r	256	1657	404	1666	402	<b><u>1665</u></b>	<b><u>402</u></b>							
511.povray_r	256	875	683	<b><u>874</u></b>	<b><u>684</u></b>	872	686							
519.lbm_r	256	684	395	683	395	<b><u>683</u></b>	<b><u>395</u></b>							
521.wrf_r	256	786	730	788	728	<b><u>788</u></b>	<b><u>728</u></b>							
526.blender_r	256	688	567	<b><u>687</u></b>	<b><u>567</u></b>	687	568							
527.cam4_r	256	738	607	741	605	<b><u>740</u></b>	<b><u>605</u></b>							
538.imagick_r	256	<b><u>760</u></b>	<b><u>838</u></b>	767	830	757	841							
544.nab_r	256	586	735	<b><u>588</u></b>	<b><u>732</u></b>	589	731							
549.fotonik3d_r	256	1922	519	<b><u>1921</u></b>	<b><u>519</u></b>	1921	519							
554.roms_r	256	<b><u>1257</u></b>	<b><u>324</u></b>	1260	323	1255	324							

SPECrate2017\_fp\_base = 593

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Numa balancing was disabled using "echo 0 > /proc/sys/kernel/numa\_balancing"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM  
memory using Redhat Enterprise Linux 7.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 593

Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: Mar-2018

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS configuration:

Sub NUMA Cluster (SNC) set to enabled  
IMC (Integrated memory controller) Interleaving set to 1 way interleave  
Xtended Prediction Table (XPT) Prefetch set to Enable  
Memory Patrol Scrub set to Disable  
Last Level Cache (LLC) Prefetch set to Disable  
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-0mnb Thu Jun 7 19:47:20 2018

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
 8 "physical id"s (chips)
256 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 16
siblings  : 32
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 4: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 5: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 6: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
physical 7: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                256
On-line CPU(s) list:   0-255
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 593

### Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: Mar-2018

## Platform Notes (Continued)

```

Thread(s) per core:      2
Core(s) per socket:     16
Socket(s):               8
NUMA node(s):           16
Vendor ID:               GenuineIntel
CPU family:              6
Model:                   85
Model name:              Intel(R) Xeon(R) Platinum 8153 CPU @ 2.00GHz
Stepping:                4
CPU MHz:                 2000.009
BogoMIPS:                4000.01
Virtualization:         VT-x
L1d cache:               32K
L1i cache:               32K
L2 cache:                1024K
L3 cache:                22528K
NUMA node0 CPU(s):      0-3,8-11,128-131,136-139
NUMA node1 CPU(s):      4-7,12-15,132-135,140-143
NUMA node2 CPU(s):      16-19,24-27,144-147,152-155
NUMA node3 CPU(s):      20-23,28-31,148-151,156-159
NUMA node4 CPU(s):      32-35,40-43,160-163,168-171
NUMA node5 CPU(s):      36-39,44-47,164-167,172-175
NUMA node6 CPU(s):      48-51,56-59,176-179,184-187
NUMA node7 CPU(s):      52-55,60-63,180-183,188-191
NUMA node8 CPU(s):      64-67,72-75,192-195,200-203
NUMA node9 CPU(s):      68-71,76-79,196-199,204-207
NUMA node10 CPU(s):     80-83,88-91,208-211,216-219
NUMA node11 CPU(s):     84-87,92-95,212-215,220-223
NUMA node12 CPU(s):     96-99,104-107,224-227,232-235
NUMA node13 CPU(s):     100-103,108-111,228-231,236-239
NUMA node14 CPU(s):     112-115,120-123,240-243,248-251
NUMA node15 CPU(s):     116-119,124-127,244-247,252-255
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm
intel_pt rsb_ctxsw spec_ctrl stibp retpoline kaiser tpr_shadow vnmi flexpriority ept
vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f
avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec
xgetbv1 cqm_llc cqm_occup_llc

```

```
/proc/cpuinfo cache data
cache size : 22528 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 593

### Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** Mar-2018

## Platform Notes (Continued)

```

physical chip.
available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 8 9 10 11 128 129 130 131 136 137 138 139
node 0 size: 94993 MB
node 0 free: 94481 MB
node 1 cpus: 4 5 6 7 12 13 14 15 132 133 134 135 140 141 142 143
node 1 size: 96762 MB
node 1 free: 96565 MB
node 2 cpus: 16 17 18 19 24 25 26 27 144 145 146 147 152 153 154 155
node 2 size: 96762 MB
node 2 free: 96508 MB
node 3 cpus: 20 21 22 23 28 29 30 31 148 149 150 151 156 157 158 159
node 3 size: 96762 MB
node 3 free: 96581 MB
node 4 cpus: 32 33 34 35 40 41 42 43 160 161 162 163 168 169 170 171
node 4 size: 96762 MB
node 4 free: 96546 MB
node 5 cpus: 36 37 38 39 44 45 46 47 164 165 166 167 172 173 174 175
node 5 size: 96762 MB
node 5 free: 96576 MB
node 6 cpus: 48 49 50 51 56 57 58 59 176 177 178 179 184 185 186 187
node 6 size: 96762 MB
node 6 free: 96611 MB
node 7 cpus: 52 53 54 55 60 61 62 63 180 181 182 183 188 189 190 191
node 7 size: 96762 MB
node 7 free: 96626 MB
node 8 cpus: 64 65 66 67 72 73 74 75 192 193 194 195 200 201 202 203
node 8 size: 96762 MB
node 8 free: 96631 MB
node 9 cpus: 68 69 70 71 76 77 78 79 196 197 198 199 204 205 206 207
node 9 size: 96762 MB
node 9 free: 96631 MB
node 10 cpus: 80 81 82 83 88 89 90 91 208 209 210 211 216 217 218 219
node 10 size: 96762 MB
node 10 free: 96588 MB
node 11 cpus: 84 85 86 87 92 93 94 95 212 213 214 215 220 221 222 223
node 11 size: 96762 MB
node 11 free: 96622 MB
node 12 cpus: 96 97 98 99 104 105 106 107 224 225 226 227 232 233 234 235
node 12 size: 96762 MB
node 12 free: 96636 MB
node 13 cpus: 100 101 102 103 108 109 110 111 228 229 230 231 236 237 238 239
node 13 size: 96762 MB
node 13 free: 96441 MB
node 14 cpus: 112 113 114 115 120 121 122 123 240 241 242 243 248 249 250 251
node 14 size: 96762 MB
node 14 free: 96530 MB

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 593

Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: Mar-2018

### Platform Notes (Continued)

```

node 15 cpus: 116 117 118 119 124 125 126 127 244 245 246 247 252 253 254 255
node 15 size: 96605 MB
node 15 free: 96470 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9  10  11  12  13  14  15
  0:  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  1:  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20  20
  2:  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20  20
  3:  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20  20
  4:  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20  20
  5:  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20  20
  6:  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20  20
  7:  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20  20
  8:  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20  20
  9:  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20  20
 10:  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20  20
 11:  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20  20
 12:  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20  20
 13:  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20  20
 14:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10  20
 15:  20  20  20  20  20  20  20  20  20  20  20  20  20  20  20  10

```

```

From /proc/meminfo
MemTotal:      1583378172 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP2

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 2
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP2"
VERSION_ID="12.2"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp2"

```

uname -a:

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 593

### Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** Mar-2018

## Platform Notes (Continued)

Linux linux-0mnb 4.4.120-92.70-default #1 SMP Wed Mar 14 15:59:43 UTC 2018 (52a83de)  
x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 5 Jun 7 19:14

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	btrfs	1.5T	14G	1.5T	1%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS INSYDE Corp. 0.80 02/24/2018

Memory:

48x NO DIMM NO DIMM

48x Samsung M393A4K40BB2-CTD 32 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====  
CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)  
-----

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CXXC 508.namd\_r(base) 510.parest\_r(base)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====  
CC 511.povray\_r(base) 526.blender\_r(base)  
-----

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Huawei

SPECrate2017\_fp\_base = 593

Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

**CPU2017 License:** 3175  
**Test Sponsor:** Huawei  
**Tested by:** Huawei

**Test Date:** Jun-2018  
**Hardware Availability:** Jul-2018  
**Software Availability:** Mar-2018

### Compiler Version Notes (Continued)

FC 507.cactuBSSN\_r(base)

-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====

FC 503.bwaves\_r(base) 549.fotonik3d\_r(base) 554.roms\_r(base)  
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

=====

CC 521.wrf\_r(base) 527.cam4\_r(base)  
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.  
-----

### Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
ifort icc

Benchmarks using both C and C++:  
icpc icc

Benchmarks using Fortran, C, and C++:  
icpc icc ifort





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 593

Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175  
Test Sponsor: Huawei  
Tested by: Huawei

Test Date: Jun-2018  
Hardware Availability: Jul-2018  
Software Availability: Mar-2018

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

### C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

### Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

### Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte

### Benchmarks using both C and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3

### Benchmarks using Fortran, C, and C++:

-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Huawei

SPECrate2017\_fp\_base = 593

Huawei 8100 V5 (Intel Xeon Platinum 8153)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 3175

Test Sponsor: Huawei

Tested by: Huawei

Test Date: Jun-2018

Hardware Availability: Jul-2018

Software Availability: Mar-2018

## Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Huawei-Platform-Settings-SKL-V1.7.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-06-07 07:47:19-0400.

Report generated on 2018-10-31 17:37:34 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.