



SPEC® CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

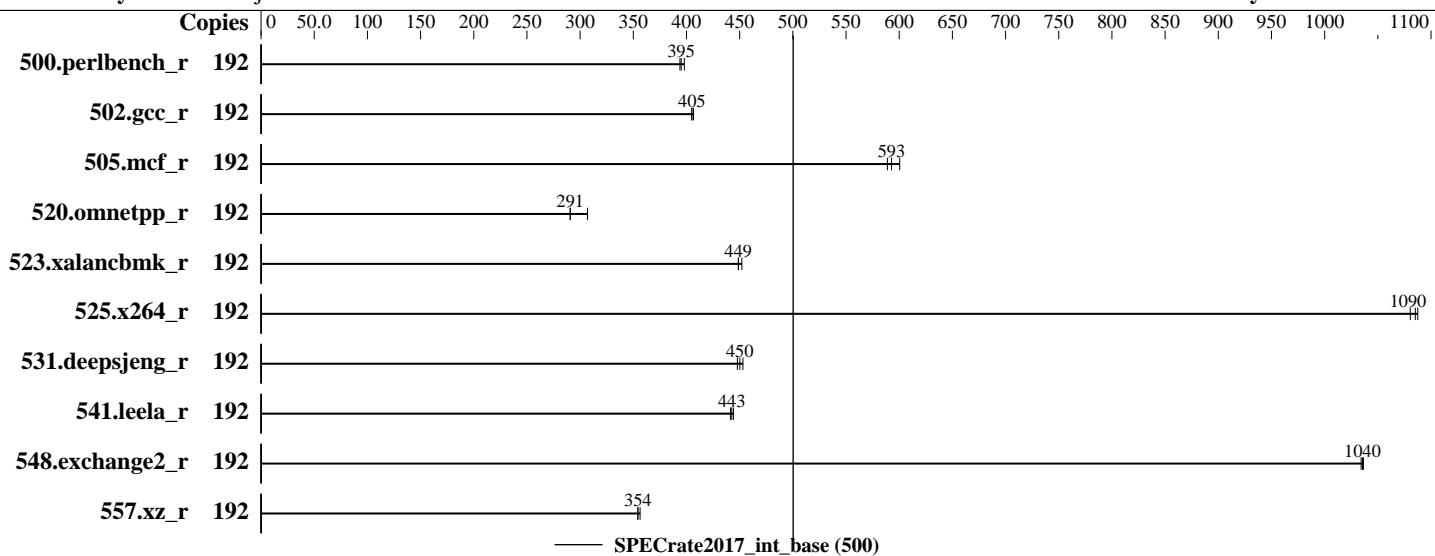

— SPECrate2017_int_base (500)

Hardware

CPU Name: Intel Xeon Platinum 8168
Max MHz.: 3700
Nominal: 2700
Enabled: 96 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 768 GB (48 x 16 GB 2Rx4 PC4-2666V-R)
Storage: 384 GB tmpfs
Other: 1 x SAS HDD, 1.2 TB, 10500 RPM, used for swap

Software

OS: SUSE Linux Enterprise Server 12 SP2
4.4.114-92.64-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Fujitsu BIOS Version V5.0.0.12 R1.9.0 for D3753-A1x. Released Mar-2018
File System: tmpfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator library V5.0.1



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	192	768	398	774	395	776	394									
502.gcc_r	192	671	405	669	407	671	405									
505.mcf_r	192	517	600	523	593	527	589									
520.omnetpp_r	192	821	307	866	291	867	291									
523.xalancbmk_r	192	448	452	452	449	452	449									
525.x264_r	192	309	1090	311	1080	310	1090									
531.deepsjeng_r	192	486	453	489	450	491	448									
541.leela_r	192	718	443	716	444	720	441									
548.exchange2_r	192	486	1030	486	1040	485	1040									
557.xz_r	192	582	356	585	354	585	354									

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Set Kernel Boot Parameter: nohz_full=1-191
Set CPU frequency governor to maximum performance with:
cpupower -c all frequency-set -g performance
Set tmpfs filesystem with:
mkdir /home/memory
mount -t tmpfs -o size=384g,rw tmpfs /home/memory
cpu idle state set with:
cpupower idle-set -d 1
cpupower idle-set -d 2
```

General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/memory/speccpu/lib/ia32:/home/memory/speccpu/lib/intel64"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/je5.0.1-32"
LD_LIBRARY_PATH = "$LD_LIBRARY_PATH:/home/memory/speccpu/je5.0.1-64"
```

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: May-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Mar-2018

General Notes (Continued)

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc: configured and built at default for 32bit (i686) and 64bit (x86_64) targets;
jemalloc: built with the RedHat Enterprise 7.4, and the system compiler gcc 4.8.5;
jemalloc: sources available via jemalloc.net

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

Intel Virtualization Technology = Disabled

HWPM Support = Disabled

Package C State limit = C0

LLC Dead Line Alloc = Disabled

Stale AtoS = Enabled

Patrol Scrub = Disabled

IMC Interleaving = 1-way

Sub NUMA Clustering = Enabled

Fan Control = Full

Sysinfo program /home/memory/speccpu/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on RX4770M4 Wed May 30 04:53:14 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz

4 "physical id"s (chips)

192 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: May-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Mar-2018

Platform Notes (Continued)

```
siblings : 48
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 192
On-line CPU(s) list: 0-191
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 8
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
Stepping: 4
CPU MHz: 2701.000
CPU max MHz: 2701.0000
CPU min MHz: 1200.0000
BogoMIPS: 5387.30
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0-2,6-8,12-14,18-20,96-98,102-104,108-110,114-116
NUMA node1 CPU(s): 3-5,9-11,15-17,21-23,99-101,105-107,111-113,117-119
NUMA node2 CPU(s): 24-26,30-32,36-38,42-44,120-122,126-128,132-134,138-140
NUMA node3 CPU(s): 27-29,33-35,39-41,45-47,123-125,129-131,135-137,141-143
NUMA node4 CPU(s): 48-50,54-56,60-62,66-68,144-146,150-152,156-158,162-164
NUMA node5 CPU(s): 51-53,57-59,63-65,69-71,147-149,153-155,159-161,165-167
NUMA node6 CPU(s): 72-74,78-80,84-86,90-92,168-170,174-176,180-182,186-188
NUMA node7 CPU(s): 75-77,81-83,87-89,93-95,171-173,177-179,183-185,189-191
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: May-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Mar-2018

Platform Notes (Continued)

```
xsaverc xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 33792 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)
node 0 cpus: 0 1 2 6 7 8 12 13 14 18 19 20 96 97 98 102 103 104 108 109 110 114 115 116
node 0 size: 95018 MB
node 0 free: 86506 MB
node 1 cpus: 3 4 5 9 10 11 15 16 17 21 22 23 99 100 101 105 106 107 111 112 113 117 118
119
node 1 size: 96760 MB
node 1 free: 96527 MB
node 2 cpus: 24 25 26 30 31 32 36 37 38 42 43 44 120 121 122 126 127 128 132 133 134
138 139 140
node 2 size: 96760 MB
node 2 free: 96318 MB
node 3 cpus: 27 28 29 33 34 35 39 40 41 45 46 47 123 124 125 129 130 131 135 136 137
141 142 143
node 3 size: 96760 MB
node 3 free: 96520 MB
node 4 cpus: 48 49 50 54 55 56 60 61 62 66 67 68 144 145 146 150 151 152 156 157 158
162 163 164
node 4 size: 96760 MB
node 4 free: 96536 MB
node 5 cpus: 51 52 53 57 58 59 63 64 65 69 70 71 147 148 149 153 154 155 159 160 161
165 166 167
node 5 size: 96760 MB
node 5 free: 96523 MB
node 6 cpus: 72 73 74 78 79 80 84 85 86 90 91 92 168 169 170 174 175 176 180 181 182
186 187 188
node 6 size: 96760 MB
node 6 free: 96540 MB
node 7 cpus: 75 76 77 81 82 83 87 88 89 93 94 95 171 172 173 177 178 179 183 184 185
189 190 191
node 7 size: 96609 MB
node 7 free: 95392 MB
node distances:
node   0    1    2    3    4    5    6    7
  0: 10  11  21  21  21  21  21  21
  1: 11  10  21  21  21  21  21  21
  2: 21  21  10  11  21  21  21  21
  3: 21  21  11  10  21  21  21  21
  4: 21  21  21  21  10  11  21  21
  5: 21  21  21  21  11  10  21  21
```

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Date: May-2018

Test Sponsor: Fujitsu

Hardware Availability: Jul-2017

Tested by: Fujitsu

Software Availability: Mar-2018

Platform Notes (Continued)

```
6: 21 21 21 21 21 21 10 11  
7: 21 21 21 21 21 21 11 10
```

```
From /proc/meminfo  
MemTotal: 790723368 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

```
/usr/bin/lsb_release -d  
SUSE Linux Enterprise Server 12 SP2
```

```
From /etc/*release* /etc/*version*  
SuSE-release:  
SUSE Linux Enterprise Server 12 (x86_64)  
VERSION = 12  
PATCHLEVEL = 2  
# This file is deprecated and will be removed in a future service pack or release.  
# Please check /etc/os-release for details about this release.  
os-release:  
NAME="SLES"  
VERSION="12-SP2"  
VERSION_ID="12.2"  
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"  
ID="sles"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:  
Linux RX4770M4 4.4.114-92.64-default #1 SMP Thu Feb 1 19:18:19 UTC 2018 (c6ce5db)  
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 May 29 22:34
```

```
SPEC is set to: /home/memory/speccpu  
Filesystem Type Size Used Avail Use% Mounted on  
tmpfs tmpfs 384G 8.8G 376G 3% /home/memory
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS FUJITSU // American Megatrends Inc. V5.0.0.12 R1.9.0 for D3753-A1x
03/29/2018

Memory:
48x Samsung M393A2G40EB2-CTD 16 GB 2 rank 2666

(End of data from sysinfo program)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

Compiler Version Notes

```
=====  
CC 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base)  
557.xz_r(base)
```

```
-----  
icc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====  
CXXC 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)  
541.leela_r(base)
```

```
-----  
icpc (ICC) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

```
=====  
FC 548.exchange2_r(base)
```

```
-----  
ifort (IFORT) 18.0.0 20170811  
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
```

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64

(Continued on next page)



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu PRIMERGY RX4770 M4, Intel Xeon Platinum 8168, 2.70GHz	SPECrate2017_int_base =	500
	SPECrate2017_int_peak =	Not Run
CPU2017 License: 19	Test Date:	May-2018
Test Sponsor: Fujitsu	Hardware Availability:	Jul-2017
Tested by: Fujitsu	Software Availability:	Mar-2018

Base Portability Flags (Continued)

541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=3 -L/usr/local/ie5.0.1-64/lib -liemalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Base Other Flags

C benchmarks;

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

The flags files that were used to format this result can be browsed at [this location](#).

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-SKL-RevE.xml>



SPEC CPU2017 Integer Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX4770 M4, Intel Xeon Platinum 8168,
2.70GHz

SPECrate2017_int_base = 500

SPECrate2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: May-2018

Hardware Availability: Jul-2017

Software Availability: Mar-2018

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-05-30 04:53:13-0400.

Report generated on 2018-10-31 17:25:18 by CPU2017 PDF formatter v6067.

Originally published on 2018-06-26.