



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSspeed2017_fp_base = 173

SPECSspeed2017_fp_peak = 174

CPU2017 License: 55


Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

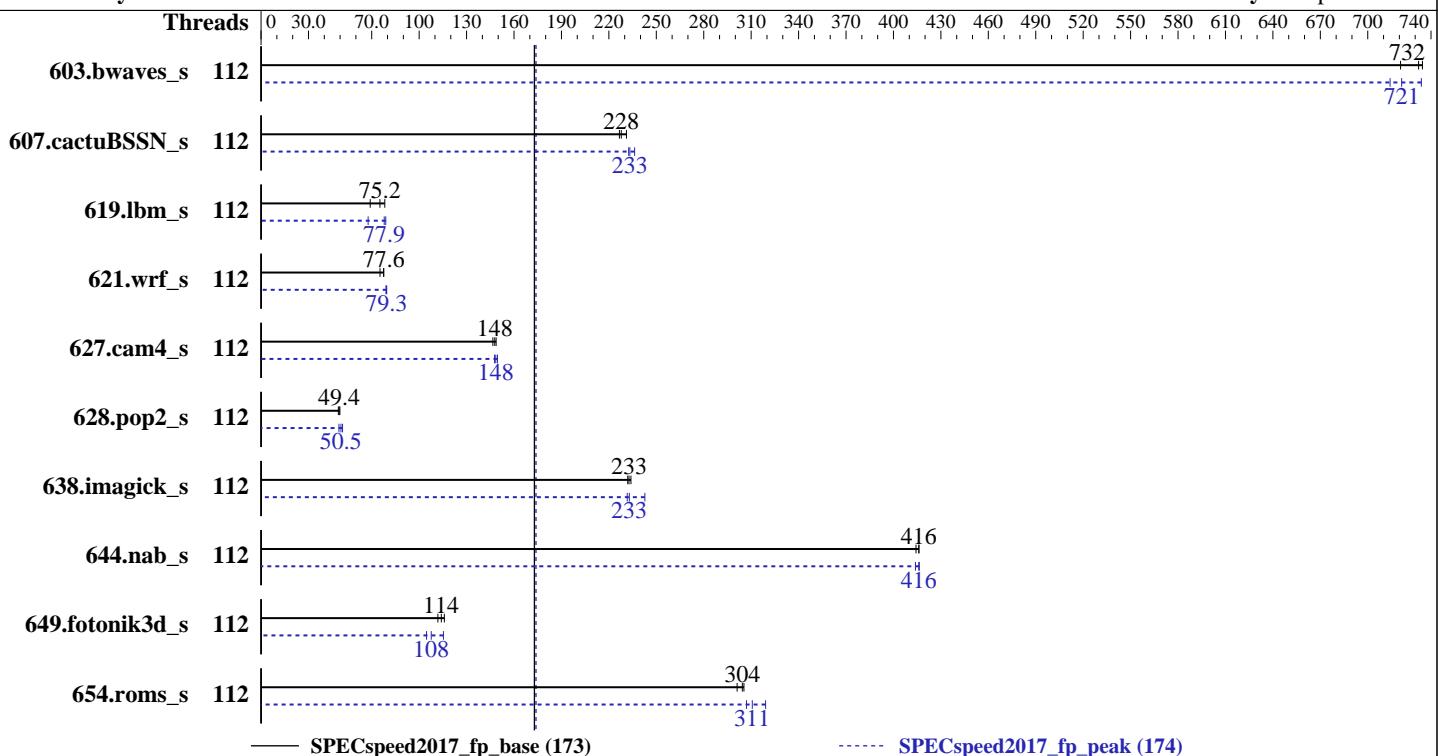

Hardware

CPU Name: Intel Xeon Platinum 8176
 Max MHz.: 3800
 Nominal: 2100
 Enabled: 112 cores, 4 chips
 Orderable: 1,2 chips
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 768 GB (24 x 32 GB 2Rx8 PC4-2666V-R)
 Storage: 960 GB SAS SSD
 Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3 4.4.114-94.11-default
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++ Compiler for Linux;
 Fortran: Version 18.0.0.128 of Intel Fortran Compiler for Linux
 Parallel: Yes
 Firmware: Version 0.4.0 released Mar-2018
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other: None



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSspeed2017_fp_base = 173

SPECSspeed2017_fp_peak = 174

CPU2017 License: 55

Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	112	80.3	735	80.6	732	81.9	721	112	81.8	721	82.6	714	80.4	734
607.cactuBSSN_s	112	73.5	227	72.1	231	73.2	228	112	71.5	233	70.5	236	71.7	233
619.lbm_s	112	66.9	78.3	69.7	75.2	75.9	69.0	112	66.4	78.9	77.3	67.7	67.2	77.9
621.wrf_s	112	176	75.2	171	77.6	170	77.6	112	166	79.5	167	79.0	167	79.3
627.cam4_s	112	59.6	149	60.0	148	60.4	147	112	60.0	148	59.7	148	59.3	150
628.pop2_s	112	238	49.9	243	48.9	240	49.4	112	241	49.3	230	51.5	235	50.5
638.imagick_s	112	62.0	233	62.2	232	61.7	234	112	61.9	233	59.4	243	62.3	232
644.nab_s	112	42.2	414	42.0	416	42.0	416	112	42.2	414	42.0	416	42.0	416
649.fotonik3d_s	112	79.9	114	78.6	116	81.5	112	112	84.7	108	79.0	115	87.1	105
654.roms_s	112	51.7	304	52.3	301	51.5	305	112	51.3	307	50.7	311	49.3	319
SPECSspeed2017_fp_base = 173							SPECSspeed2017_fp_peak = 174							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM
memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)
is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Platform Notes

BIOS settings:

Sub NUMA Cluster Disabled

Virtualization Technology Disabled

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSspeed2017_fp_base = 173

SPECSspeed2017_fp_peak = 174

CPU2017 License: 55

Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E Disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub Disabled

Logical Processor Disabled

CPU Interconnect Bus Link Power Management Disabled

PCI ASPM L1 Link Power Management Disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f
running on linux-5y3r Tue Apr 17 12:58:27 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
        4 "physical id"s (chips)
        112 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 28
siblings : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 112
On-line CPU(s) list:   0-111
Thread(s) per core:    1
Core(s) per socket:    28
Socket(s):              4
NUMA node(s):           4
Vendor ID:              GenuineIntel
CPU family:             6
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSpeed2017_fp_base = 173

SPECSpeed2017_fp_peak = 174

CPU2017 License: 55

Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```

Model: 85
Model name: Intel(R) Xeon(R) Platinum 8176 CPU @ 2.10GHz
Stepping: 4
CPU MHz: 2095.064
BogoMIPS: 4190.12
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 39424K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts
dtherm intel_pt rsb_ctxsw spec_ctrl retrpoline kaiser tpr_shadow vnmi flexpriority
ept vpid fsgsbase tsc_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx
avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt
xsavec xgetbv1 cqm_llc cqm_occup_llc pku ospke

```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
100 104 108
node 0 size: 192127 MB
node 0 free: 189189 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
101 105 109
node 1 size: 193524 MB
node 1 free: 190471 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
102 106 110
node 2 size: 193524 MB
node 2 free: 192222 MB

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSspeed2017_fp_base = 173

SPECSspeed2017_fp_peak = 174

CPU2017 License: 55

Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

```
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
103 107 111
node 3 size: 193522 MB
node 3 free: 192004 MB
node distances:
node   0   1   2   3
 0: 10 21 21 21
 1: 21 10 21 21
 2: 21 21 10 21
 3: 21 21 21 10

From /proc/meminfo
MemTotal:      791244576 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 3
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
os-release:
NAME="SLES"
VERSION="12-SP3"
VERSION_ID="12.3"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-5y3r 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 17 08:06

SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        xfs   882G   23G  860G   3% /
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSspeed2017_fp_base = 173

SPECSspeed2017_fp_peak = 174

CPU2017 License: 55

Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Platform Notes (Continued)

hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.4.0 03/28/2018

Memory:

12x 00AD00B300AD HMA84GR7AFR4N-VK 32 GB 2 rank 2666

12x 00AD063200AD HMA84GR7AFR4N-VK 32 GB 2 rank 2666

24x Not Specified Not Specified

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 619.lbm_s(base) 638.imagick_s(base, peak) 644.nab_s(base, peak)

=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 619.lbm_s(peak)

=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 607.cactubSSN_s(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 607.cactubSSN_s(peak)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSspeed2017_fp_base = 173

SPECSspeed2017_fp_peak = 174

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Compiler Version Notes (Continued)

```
=====
FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
FC 603.bwaves_s(peak) 649.fotonik3d_s(peak) 654.roms_s(peak)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
CC 621.wrf_s(base) 627.cam4_s(base, peak) 628.pop2_s(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
CC 621.wrf_s(peak) 628.pop2_s(peak)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

Base Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECspeed2017_fp_base = 173

SPECspeed2017_fp_peak = 174

CPU2017 License: 55

Test Date: Apr-2018

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubssn_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs -align array32byte
```



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSPEED2017_fp_base = 173

SPECSPEED2017_fp_peak = 174

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Base Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

619.lbm_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSPEED2017_fp_base = 173

SPECSPEED2017_fp_peak = 174

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

Peak Optimization Flags (Continued)

638.imagick_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP

644.nab_s: Same as 638.imagick_s

Fortran benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -DSPEC_SUPPRESS_OPENMP
-DSPEC_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3 -qopenmp
-nostandard-realloc-lhs -align array32byte

Benchmarks using both Fortran and C:

621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div
-qopt-mem-layout-trans=3 -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -qopenmp
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte

628.pop2_s: Same as 621.wrf_s

Benchmarks using Fortran, C, and C++:

-prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512 -qopt-prefetch
-ipo -O3 -ffinite-math-only -no-prec-div -qopt-mem-layout-trans=3
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP -nostandard-realloc-lhs
-align array32byte

Peak Other Flags

C benchmarks:

-m64 -std=c11

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX840c (Intel Xeon Platinum 8176 CPU,
2.10GHz)

SPECSspeed2017_fp_base = 173

SPECSspeed2017_fp_peak = 174

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2018

Hardware Availability: Sep-2017

Software Availability: Sep-2017

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-04-17 00:58:26-0400.

Report generated on 2018-10-31 18:21:32 by CPU2017 PDF formatter v6067.

Originally published on 2018-09-04.