



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Cisco Systems

### Cisco UCS C125 (AMD EPYC 7401)

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

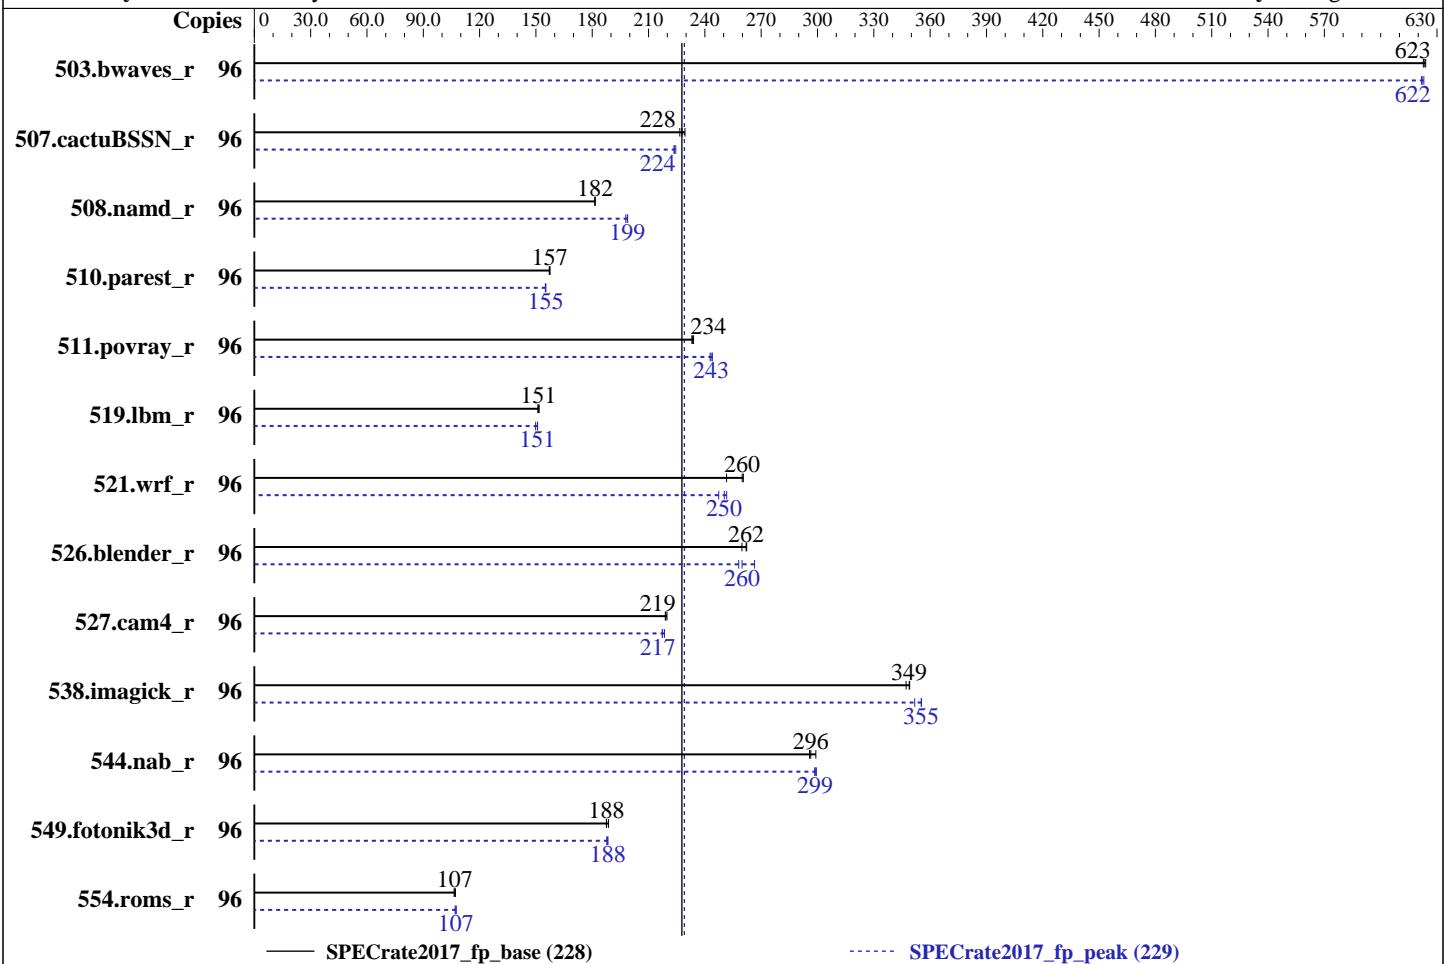

— SPECrate2017\_fp\_base (228)

----- SPECrate2017\_fp\_peak (229)

#### Hardware

CPU Name: AMD EPYC 7401  
 Max MHz.: 3000  
 Nominal: 2000  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 3 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2667V-R)  
 Storage: 600 GB SAS HDD, 15K RPM  
 Other: None

#### Software

OS: SUSE Linux Enterprise Server 12 SP3 x86\_64 kernel 4.4.143-94.47-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Cisco Systems, Inc. BIOS Version C125.4.0.0.16.0511180518 released May-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc general purpose malloc implementation v4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

**Cisco Systems**

**Cisco UCS C125 (AMD EPYC 7401)**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**SPECrate2017\_fp\_base = 228**

**SPECrate2017\_fp\_peak = 229**

**Test Date:** Jun-2018

**Hardware Availability:** Aug-2018

**Software Availability:** Aug-2018

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1546	623	<b>1545</b>	<b>623</b>	1543	624	96	<b>1547</b>	<b>622</b>	1545	623	1548	622		
507.cactusBSSN_r	96	536	227	530	229	<b>533</b>	<b>228</b>	96	544	224	<b>543</b>	<b>224</b>	541	225		
508.namd_r	96	502	182	503	181	<b>502</b>	<b>182</b>	96	461	198	<b>459</b>	<b>199</b>	459	199		
510.parest_r	96	<b>1595</b>	<b>157</b>	1599	157	1595	157	96	1620	155	1618	155	<b>1618</b>	<b>155</b>		
511.povray_r	96	958	234	<b>960</b>	<b>234</b>	962	233	96	923	243	919	244	<b>921</b>	<b>243</b>		
519.lbm_r	96	<b>668</b>	<b>151</b>	670	151	667	152	96	<b>671</b>	<b>151</b>	670	151	675	150		
521.wrf_r	96	<b>827</b>	<b>260</b>	825	260	855	252	96	855	252	<b>859</b>	<b>250</b>	869	247		
526.blender_r	96	563	260	<b>558</b>	<b>262</b>	557	262	96	567	258	<b>563</b>	<b>260</b>	549	266		
527.cam4_r	96	767	219	764	220	<b>766</b>	<b>219</b>	96	773	217	768	219	<b>772</b>	<b>217</b>		
538.imagick_r	96	<b>684</b>	<b>349</b>	684	349	688	347	96	<b>672</b>	<b>355</b>	679	352	672	355		
544.nab_r	96	546	296	<b>545</b>	<b>296</b>	540	299	96	541	299	<b>541</b>	<b>299</b>	540	299		
549.fotonik3d_r	96	1995	188	1983	189	<b>1993</b>	<b>188</b>	96	1986	188	1993	188	<b>1988</b>	<b>188</b>		
554.roms_r	96	1424	107	<b>1429</b>	<b>107</b>	1434	106	96	1419	108	1426	107	<b>1420</b>	<b>107</b>		

**SPECrate2017\_fp\_base = 228**

**SPECrate2017\_fp\_peak = 229**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

'numactl' was used to bind copies to the cores.

See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Set dirty\_ratio=8 to limit dirty cache to 8% of memory

Set swappiness=1 to swap only if necessary

Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Cisco Systems

### Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_base = 228

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2017/amd1704-rate-libs-revC/64;/opt/cpu2017/amd1704-rate-libs-revC/32;"  
MALLOC\_CONF = "lg\_chunk:28"

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4

jemalloc, a general purpose malloc implementation, was obtained at  
<https://github.com/jemalloc/jemalloc/releases/download/4.5.0/jemalloc-4.5.0.tar.bz2>

jemalloc was built with GCC v4.8.5 in RHEL v7.2 under default conditions.

jemalloc uses environment variable MALLOC\_CONF with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use for automatic multiplexing  
of threads and arenas.

lg\_chunk: set the virtual memory chunk size (log base 2). For example,  
lg\_chunk:21 sets the default chunk size to  $2^{21} = 2\text{MiB}$ .

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers  
with gfortran. It is available here:

<http://developer.amd.com/amd-aocc/>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

## Platform Notes

BIOS Settings:

Performance Determinism set to Power Deterministic  
Sysinfo program /opt/cpu2017/bin/sysinfo  
Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f  
running on linux-7bdx Fri Sep 7 10:58:11 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
model name : AMD EPYC 7401 24-Core Processor  
2 "physical id"s (chips)  
96 "processors"

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Cisco Systems

### Cisco UCS C125 (AMD EPYC 7401)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate2017\_fp\_base = 228

SPECrate2017\_fp\_peak = 229

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
siblings   : 48
physical 0: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
physical 1: cores 0 1 2 4 5 6 8 9 10 12 13 14 16 17 18 20 21 22 24 25 26 28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   2
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          8
Vendor ID:             AuthenticAMD
CPU family:            23
Model:                 1
Model name:            AMD EPYC 7401 24-Core Processor
Stepping:               2
CPU MHz:               2000.000
CPU max MHz:           2000.0000
CPU min MHz:           1200.0000
BogoMIPS:              3992.55
Virtualization:        AMD-V
L1d cache:             32K
L1i cache:             64K
L2 cache:              512K
L3 cache:              8192K
NUMA node0 CPU(s):    0-5,48-53
NUMA node1 CPU(s):    6-11,54-59
NUMA node2 CPU(s):    12-17,60-65
NUMA node3 CPU(s):    18-23,66-71
NUMA node4 CPU(s):    24-29,72-77
NUMA node5 CPU(s):    30-35,78-83
NUMA node6 CPU(s):    36-41,84-89
NUMA node7 CPU(s):    42-47,90-95
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                      constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmpfperf eagerfpu dni
                      pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
                      rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                      osvw skininit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat
                      hw_pstate ssbd ibpb retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale
                      vmcb_clean flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_fp\_base = 228

Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## Platform Notes (Continued)

```
bmi1 avx2 smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero  
irperf overflow_recov succor smca
```

```
/proc/cpuinfo cache data  
cache size : 512 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 4 5 48 49 50 51 52 53  
node 0 size: 128831 MB  
node 0 free: 128599 MB  
node 1 cpus: 6 7 8 9 10 11 54 55 56 57 58 59  
node 1 size: 129020 MB  
node 1 free: 128869 MB  
node 2 cpus: 12 13 14 15 16 17 60 61 62 63 64 65  
node 2 size: 129020 MB  
node 2 free: 128821 MB  
node 3 cpus: 18 19 20 21 22 23 66 67 68 69 70 71  
node 3 size: 129020 MB  
node 3 free: 128873 MB  
node 4 cpus: 24 25 26 27 28 29 72 73 74 75 76 77  
node 4 size: 129020 MB  
node 4 free: 128895 MB  
node 5 cpus: 30 31 32 33 34 35 78 79 80 81 82 83  
node 5 size: 129020 MB  
node 5 free: 128878 MB  
node 6 cpus: 36 37 38 39 40 41 84 85 86 87 88 89  
node 6 size: 129020 MB  
node 6 free: 128893 MB  
node 7 cpus: 42 43 44 45 46 47 90 91 92 93 94 95  
node 7 size: 116923 MB  
node 7 free: 116795 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 16 16 16 32 32 32 32  
1: 16 10 16 16 32 32 32 32  
2: 16 16 10 16 32 32 32 32  
3: 16 16 16 10 32 32 32 32  
4: 32 32 32 32 10 16 16 16  
5: 32 32 32 32 16 10 16 16  
6: 32 32 32 32 16 16 10 16  
7: 32 32 32 32 16 16 16 10
```

From /proc/meminfo

```
MemTotal: 1044357860 kB
```

```
HugePages_Total: 0
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Cisco Systems

### Cisco UCS C125 (AMD EPYC 7401)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECrate2017\_fp\_base = 228

SPECrate2017\_fp\_peak = 229

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

## Platform Notes (Continued)

Hugepagesize: 2048 kB

```
From /etc/*release* /etc/*version*
SuSE-release:
    SUSE Linux Enterprise Server 12 (x86_64)
    VERSION = 12
    PATCHLEVEL = 3
    # This file is deprecated and will be removed in a future service pack or release.
    # Please check /etc/os-release for details about this release.
os-release:
    NAME="SLES"
    VERSION="12-SP3"
    VERSION_ID="12.3"
    PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
    ID="sles"
    ANSI_COLOR="0;32"
    CPE_NAME="cpe:/o:suse:sles:12:sp3"
```

uname -a:

```
Linux linux-7bdx 4.4.143-94.47-default #1 SMP Thu Aug 9 12:47:15 UTC 2018 (6bff971)
x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Dec 31 16:02

SPEC is set to: /opt/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	450G	20G	431G	5%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Cisco Systems, Inc. C125.4.0.0.16.0511180518 05/11/2018

Memory:

16x 0xCE00 M386A8K40BM2-CTD 64 GB 4 rank 2667

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
CC 519.lbm_r(base, peak) 538.imagick_r(base, peak) 544.nab_r(base, peak)
-----
AOCC.LLVM.4.0.0.B35.2017_04_26 clang version 4.0.0 (CLANG:) (based on LLVM
    AOCC.LLVM.4.0.0.B35.2017_04_26)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_fp\_base = 228

Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

=====  
FC 507.cactuBSSN\_r(base, peak)

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_fp\_base = 228

Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## Compiler Version Notes (Continued)

For more information about these matters, see the file named COPYING

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base,  
peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====  
CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_fp\_base = 228

Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## Base Compiler Invocation (Continued)

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
526.blender_r: -funsigned-char -D__BOOL_DEFINED -DSPEC_LP64
527.cam4_r: -DSPEC_CASE_FLAG -DSPEC_LP64
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -z muldefs -ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -march=znver1 -mllvm -unroll-threshold=100
-finline-aggressive -fremap-arrays -inline-threshold=1000 -z muldefs
-ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -mavx -madx -funroll-loops -ffast-math
-z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

SPECrate2017\_fp\_base = 228

Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Date: Jun-2018

Test Sponsor: Cisco Systems

Hardware Availability: Aug-2018

Tested by: Cisco Systems

Software Availability: Aug-2018

## Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -max -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc -lgfortran -lamdlibm
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop
-disable-vect-cmp -O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-inline-threshold=1000 -finline-aggressive -max -madx -funroll-loops
-z muldefs -fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option="
-disable-vect-cmp" -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_base = 228

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-ljemalloc
```

C++ benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -finline-aggressive -mllvm -unroll-threshold=100  
-fremap-arrays -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -O3  
-mavx2 -madx -funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -O3 -mavx -ffast-math -funroll-loops  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl, -plugin-opt= -merge-constant  
-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays  
-inline-threshold=1000 -O3 -mavx2 -madx -funroll-loops  
-ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=" -inline-threshold:1000" -ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lsr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -ljemalloc
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS C125 (AMD EPYC 7401)

SPECrate2017\_fp\_base = 228

SPECrate2017\_fp\_peak = 229

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Jun-2018

Hardware Availability: Aug-2018

Software Availability: Aug-2018

## Peak Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++:

```
-flto -Wl, -plugin-opt= -merge-constant -lslr-in-nested-loop -Ofast  
-march=znver1 -fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -unroll-threshold=100 -fremap-arrays -inline-threshold=1000  
-finline-aggressive -O3 -mavx2 -madx -funroll-loops -ffast-math  
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=  
-inline-threshold:1000" -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-V1-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-V1-revA.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2018-09-07 13:58:10-0400.

Report generated on 2018-10-31 19:14:49 by CPU2017 PDF formatter v6067.

Originally published on 2018-10-02.