



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55


Test Date: Nov-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

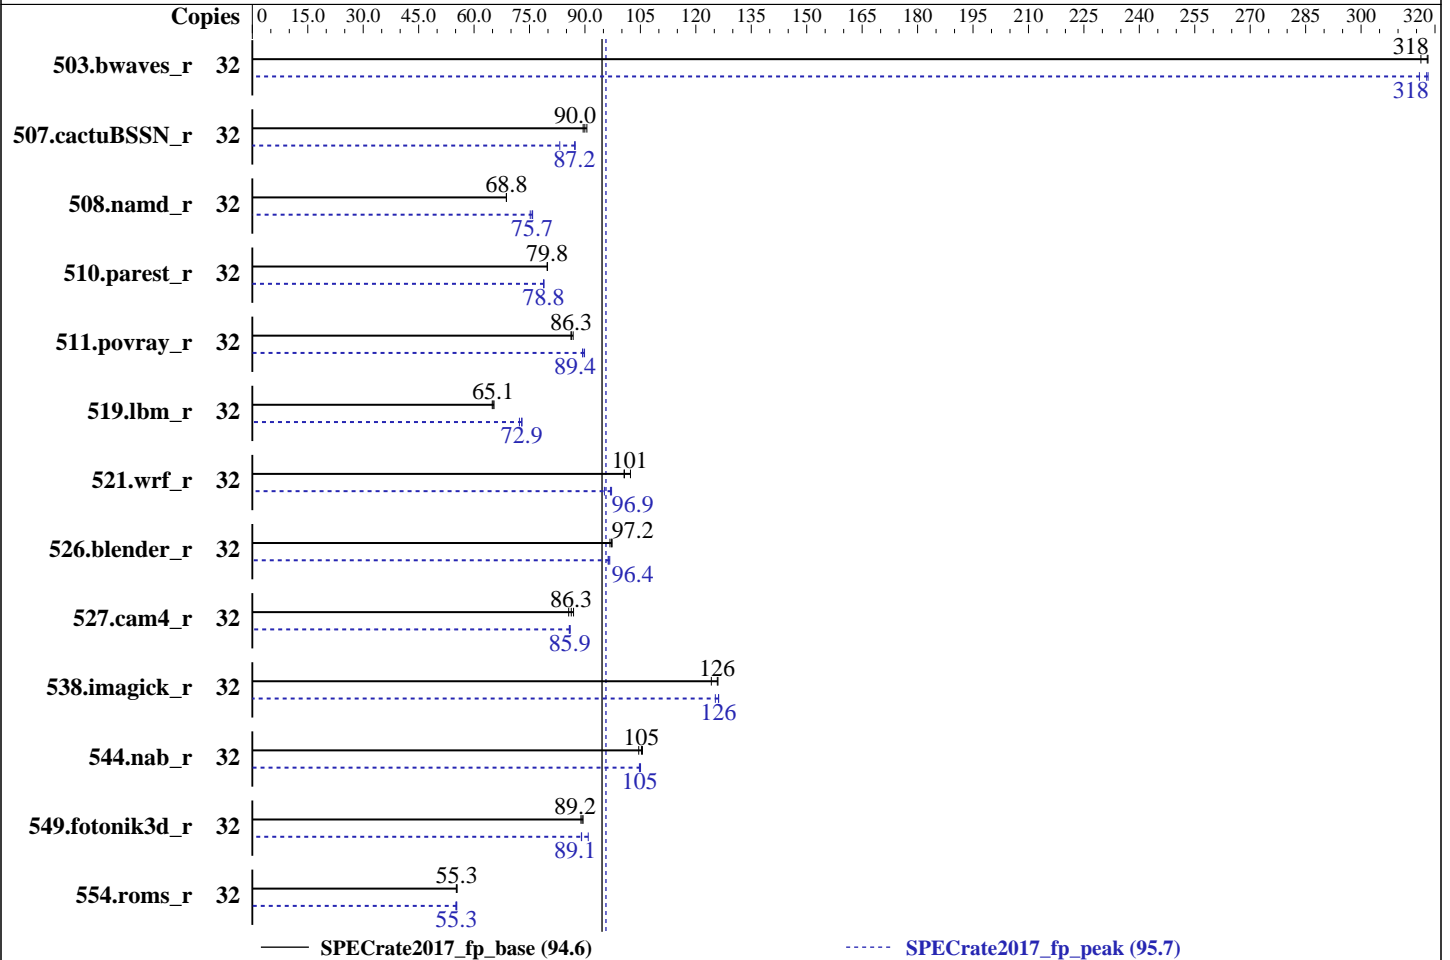

### Hardware

CPU Name: AMD EPYC 7351P  
 Max MHz.: 2900  
 Nominal: 2400  
 Enabled: 16 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip  
 Cache L1: 64 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 64 MB I+D on chip per chip, 8 MB shared / 2 cores  
 Other: None  
 Memory: 512 GB (8 x 64 GB 4DRx4 PC4-2667V-L)  
 Storage: 1 x 1.92 TB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 12 SP3  
 kernel 4.4.126-94.22-default  
 Compiler: C/C++: Version 1.0.0 of AOCC  
 Fortran: Version 4.8.2 of GCC  
 Parallel: No  
 Firmware: Version 1.6.4 released Oct-2018  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator library V4.5.0



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Nov-2018  
Hardware Availability: Dec-2018  
Software Availability: Apr-2018

## Results Table

| Benchmark       | Base   |            |             |             |             |             |             | Peak   |            |             |             |             |             |             |
|-----------------|--------|------------|-------------|-------------|-------------|-------------|-------------|--------|------------|-------------|-------------|-------------|-------------|-------------|
|                 | Copies | Seconds    | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Copies | Seconds    | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 503.bwaves_r    | 32     | 1015       | 316         | 1009        | 318         | <b>1009</b> | <b>318</b>  | 32     | 1016       | 316         | <b>1010</b> | <b>318</b>  | 1009        | 318         |
| 507.cactuBSSN_r | 32     | 453        | 89.5        | 448         | 90.5        | <b>450</b>  | <b>90.0</b> | 32     | <b>465</b> | <b>87.2</b> | 487         | 83.2        | 464         | 87.4        |
| 508.namd_r      | 32     | 442        | 68.7        | 442         | 68.8        | <b>442</b>  | <b>68.8</b> | 32     | <b>402</b> | <b>75.7</b> | 401         | 75.8        | 404         | 75.2        |
| 510.parest_r    | 32     | 1048       | 79.9        | <b>1049</b> | <b>79.8</b> | 1049        | 79.8        | 32     | 1061       | 78.9        | 1062        | 78.8        | <b>1062</b> | <b>78.8</b> |
| 511.povray_r    | 32     | <b>866</b> | <b>86.3</b> | 866         | 86.3        | 861         | 86.8        | 32     | 836        | 89.4        | <b>835</b>  | <b>89.4</b> | 831         | 89.9        |
| 519.lbm_r       | 32     | <b>518</b> | <b>65.1</b> | 520         | 64.9        | 516         | 65.4        | 32     | <b>463</b> | <b>72.9</b> | 462         | 73.0        | 467         | 72.3        |
| 521.wrf_r       | 32     | 713        | 101         | <b>712</b>  | <b>101</b>  | 701         | 102         | 32     | 737        | 97.2        | <b>740</b>  | <b>96.9</b> | 752         | 95.3        |
| 526.blender_r   | 32     | <b>502</b> | <b>97.2</b> | 504         | 96.8        | 501         | 97.4        | 32     | 504        | 96.7        | <b>505</b>  | <b>96.4</b> | 506         | 96.3        |
| 527.cam4_r      | 32     | 654        | 85.6        | <b>648</b>  | <b>86.3</b> | 644         | 86.9        | 32     | 653        | 85.8        | 651         | 86.0        | <b>652</b>  | <b>85.9</b> |
| 538.imagick_r   | 32     | 632        | 126         | <b>633</b>  | <b>126</b>  | 641         | 124         | 32     | 631        | 126         | 635         | 125         | <b>631</b>  | <b>126</b>  |
| 544.nab_r       | 32     | 515        | 105         | <b>511</b>  | <b>105</b>  | 510         | 106         | 32     | 514        | 105         | 513         | 105         | <b>513</b>  | <b>105</b>  |
| 549.fotonik3d_r | 32     | 1393       | 89.5        | 1403        | 88.9        | <b>1398</b> | <b>89.2</b> | 32     | 1372       | 90.9        | <b>1400</b> | <b>89.1</b> | 1401        | 89.0        |
| 554.roms_r      | 32     | <b>919</b> | <b>55.3</b> | 918         | 55.4        | 921         | 55.2        | 32     | 919        | 55.3        | <b>920</b>  | <b>55.3</b> | 923         | 55.1        |

SPECrate2017\_fp\_base = 94.6

SPECrate2017\_fp\_peak = 95.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at <http://developer.amd.com/amd-aocc/>

The AOCC Gold Linker plugin was installed and used for the link stage.

The AOCC Fortran Plugin version 1.0 was used to leverage AOCC optimizers with gfortran. It is available here: <http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Operating System Notes (Continued)

Set dirty\_ratio=8 to limit dirty cache to 8% of memory  
Set swappiness=1 to swap only if necessary  
Set zone\_reclaim\_mode=1 to free local node memory and avoid remote memory  
sync then drop\_caches=3 to reset caches before invoking runcpu

dirty\_ratio, swappiness, zone\_reclaim\_mode and drop\_caches were  
all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages were enabled for this run (OS default)

## General Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017-1.0.5/amd1704-rate-libs-revD/64:/home/cpu2017-1.0.5/amd1704-rate-libs-revD/32:"  
MALLOC_CONF = "lg_chunk:28"
```

Binaries were compiled on a system with 2x AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.4  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5  
in RHEL v7.2 under default conditions.  
jemalloc: sources available from jemalloc.net or  
<https://github.com/jemalloc/jemalloc/releases>  
jemalloc uses environment variable MALLOC\_CONF  
with values narenas and lg\_chunk:  
narenas: sets the maximum number of arenas to use  
for automatic multiplexing  
of threads and arenas.  
lg\_chunk: set the virtual memory chunk size (log  
base 2). For example,  
lg\_chunk:21 sets the default chunk size to 2<sup>21</sup> =  
2MiB.

## Platform Notes

BIOS settings:  
Memory Interleaving set to Channel Interleaving  
Virtualization Technology disabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Platform Notes (Continued)

Turbo Boost enabled  
 C States set to Autonomous  
 Memory Patrol Scrub disabled  
 Memory Refresh Rate set to 1x  
 PCI ASPM L1 Link Power Management disabled  
 Determinism Slider set to Power Determinism  
 Sysinfo program /home/cpu2017-1.0.5/bin/sysinfo  
 Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9  
 running on linux-fl85 Thu Nov 29 12:31:27 2018

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo  
 model name : AMD EPYC 7351P 16-Core Processor  
 1 "physical id"s (chips)  
 32 "processors"  
 cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)  
 cpu cores : 16  
 siblings : 32  
 physical 0: cores 0 1 8 9 12 13 16 17 20 21 24 25 28 29

From lscpu:  
 Architecture: x86\_64  
 CPU op-mode(s): 32-bit, 64-bit  
 Byte Order: Little Endian  
 CPU(s): 32  
 On-line CPU(s) list: 0-31  
 Thread(s) per core: 2  
 Core(s) per socket: 16  
 Socket(s): 1  
 NUMA node(s): 4  
 Vendor ID: AuthenticAMD  
 CPU family: 23  
 Model: 1  
 Model name: AMD EPYC 7351P 16-Core Processor  
 Stepping: 2  
 CPU MHz: 2395.444  
 BogoMIPS: 4790.88  
 Virtualization: AMD-V  
 L1d cache: 32K  
 L1i cache: 64K  
 L2 cache: 512K  
 L3 cache: 8192K  
 NUMA node0 CPU(s): 0,4,8,12,16,20,24,28

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Date: Nov-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Platform Notes (Continued)

```

NUMA node1 CPU(s):      1,5,9,13,17,21,25,29
NUMA node2 CPU(s):      2,6,10,14,18,22,26,30
NUMA node3 CPU(s):      3,7,11,15,19,23,27,31
Flags:                   fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc extd_apicid amd_dcm aperfmperf eagerfpu pni
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx arat cpb
hw_pstate retpoline retpoline_amd npt lbrv svm_lock nrip_save tsc_scale vmcb_clean
flushbyasid decodeassists pausefilter pfthreshold vmmcall avic fsgsbase bmi1 avx2
smep bmi2 rdseed adx smap clflushopt sha_ni xsaveopt xsavec xgetbv1 clzero irperf
ibpb overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28
node 0 size: 128621 MB
node 0 free: 128461 MB
node 1 cpus: 1 5 9 13 17 21 25 29
node 1 size: 129018 MB
node 1 free: 128873 MB
node 2 cpus: 2 6 10 14 18 22 26 30
node 2 size: 129018 MB
node 2 free: 128849 MB
node 3 cpus: 3 7 11 15 19 23 27 31
node 3 size: 129017 MB
node 3 free: 128859 MB
node distances:
node  0  1  2  3
0:   10  16  16  16
1:   16  10  16  16
2:   16  16  10  16
3:   16  16  16  10

```

```

From /proc/meminfo
MemTotal:      528052376 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Platform Notes (Continued)

From /etc/\*release\* /etc/\*version\*

SuSE-release:

SUSE Linux Enterprise Server 12 (x86\_64)

VERSION = 12

PATCHLEVEL = 3

# This file is deprecated and will be removed in a future service pack or release.

# Please check /etc/os-release for details about this release.

os-release:

NAME="SLES"

VERSION="12-SP3"

VERSION\_ID="12.3"

PRETTY\_NAME="SUSE Linux Enterprise Server 12 SP3"

ID="sles"

ANSI\_COLOR="0;32"

CPE\_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:

Linux linux-fl85 4.4.126-94.22-default #1 SMP Wed Apr 11 07:45:03 UTC 2018 (9649989)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retpoline + IBPB

run-level 3 Nov 29 03:07 last=5

SPEC is set to: /home/cpu2017-1.0.5

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|------------|------|------|------|-------|------|------------|
| /dev/sda4  | xfs  | 1.8T | 9.5G | 1.8T  | 1%   | /home      |

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.6.4 10/04/2018

Memory:

8x 80CE863280CE M386A8K40BM2-CTD 64 GB 4 rank 2666

8x Not Specified Not Specified

(End of data from sysinfo program)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Compiler Version Notes

=====  
CC 519.lbm\_r(base, peak) 538.imagick\_r(base, peak) 544.nab\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
CXXC 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
CC 511.povray\_r(base, peak) 526.blender\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
=====

=====  
FC 507.cactuBSSN\_r(base, peak)  
=====

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM  
AOCC.LLVM.4.0.0.B35.2017\_04\_26)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====  
FC 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak) 554.roms\_r(base, peak)  
-----

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====  
CC 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)  
-----

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.4.0.0.B35.2017\_04\_26 clang version 4.0.0 (CLANG:) (based on LLVM

AOCC.LLVM.4.0.0.B35.2017\_04\_26)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/AOCC-1.0-Compiler/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

(Continued on next page)





# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Base Compiler Invocation (Continued)

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_CASE\_FLAG -fconvert=big-endian -DSPEC\_LP64

526.blender\_r: -funsigned-char -D\_\_BOOL\_DEFINED -DSPEC\_LP64

527.cam4\_r: -DSPEC\_CASE\_FLAG -DSPEC\_LP64

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vec-cmp

-O3 -ffast-math -march=znver1 -fstruct-layout=2

-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2

-mllvm -inline-threshold=1000 -mllvm -disable-vec-cmp -z muldefs

-ljemalloc

C++ benchmarks:

-flto -Wl,-plugin-opt=-merge-constant

-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vec-cmp

-O3 -march=znver1 -mllvm -unroll-threshold=100 -finline-aggressive

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Date: Nov-2018

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2018

Tested by: Dell Inc.

Software Availability: Apr-2018

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-fremap-arrays -mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-z muldefs -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -mavx -madox -funroll-loops -ffast-math -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp -mavx -madox
-funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
-lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-finline-aggressive -z muldefs -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop -Wl,-plugin-opt=-disable-vect-cmp
-O3 -ffast-math -march=znver1 -fstruct-layout=2
-mllvm -unroll-threshold=100 -fremap-arrays -mno-avx2
-mllvm -inline-threshold=1000 -mllvm -disable-vect-cmp
-finline-aggressive -mavx -madox -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-disable-vect-cmp -ljemalloc
```



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

Benchmarks using both C and C++:

clang++ clang

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -ljemalloc
```

C++ benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-finline-aggressive -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -ljemalloc
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx2 -madx -funroll-loops  
-ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2018

Hardware Availability: Dec-2018

Software Availability: Apr-2018

## Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -ljemalloc  
-lgfortran -lamdlibm
```

Benchmarks using both Fortran and C:

```
521.wrf_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -O3 -mavx -ffast-math  
-funroll-loops -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000  
-ljemalloc -lgfortran -lamdlibm
```

```
527.cam4_r: -flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively  
-mno-avx2 -mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -O3 -mavx2 -madox  
-funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000  
-ljemalloc -lgfortran -lamdlibm
```

Benchmarks using both C and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -finline-aggressive -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-flto -Wl,-plugin-opt=-merge-constant  
-Wl,-plugin-opt=-lsr-in-nested-loop -Ofast -march=znver1  
-fstruct-layout=3 -mllvm -vectorize-memory-aggressively -mno-avx2  
-mllvm -unroll-threshold=100 -fremap-arrays  
-mllvm -inline-threshold=1000 -finline-aggressive -O3 -mavx2 -madox  
-funroll-loops -ffast-math -fplugin=dragonegg.so  
-fplugin-arg-dragonegg-llvm-option=-merge-constant  
-fplugin-arg-dragonegg-llvm-option=-inline-threshold:1000 -ljemalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aoccl100-flags-revC-I.2018-11-13.html>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.html>



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 94.6

PowerEdge R7415 (AMD EPYC 7351P, 2.40GHz)

SPECrate2017\_fp\_peak = 95.7

**CPU2017 License:** 55

**Test Date:** Nov-2018

**Test Sponsor:** Dell Inc.

**Hardware Availability:** Dec-2018

**Tested by:** Dell Inc.

**Software Availability:** Apr-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc100-flags-revC-I.2018-11-13.xml>

<http://www.spec.org/cpu2017/flags/gcc.2018-02-16.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.5 on 2018-11-29 13:31:26-0500.

Report generated on 2018-12-26 13:01:50 by CPU2017 PDF formatter v6067.

Originally published on 2018-12-25.