



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19


Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

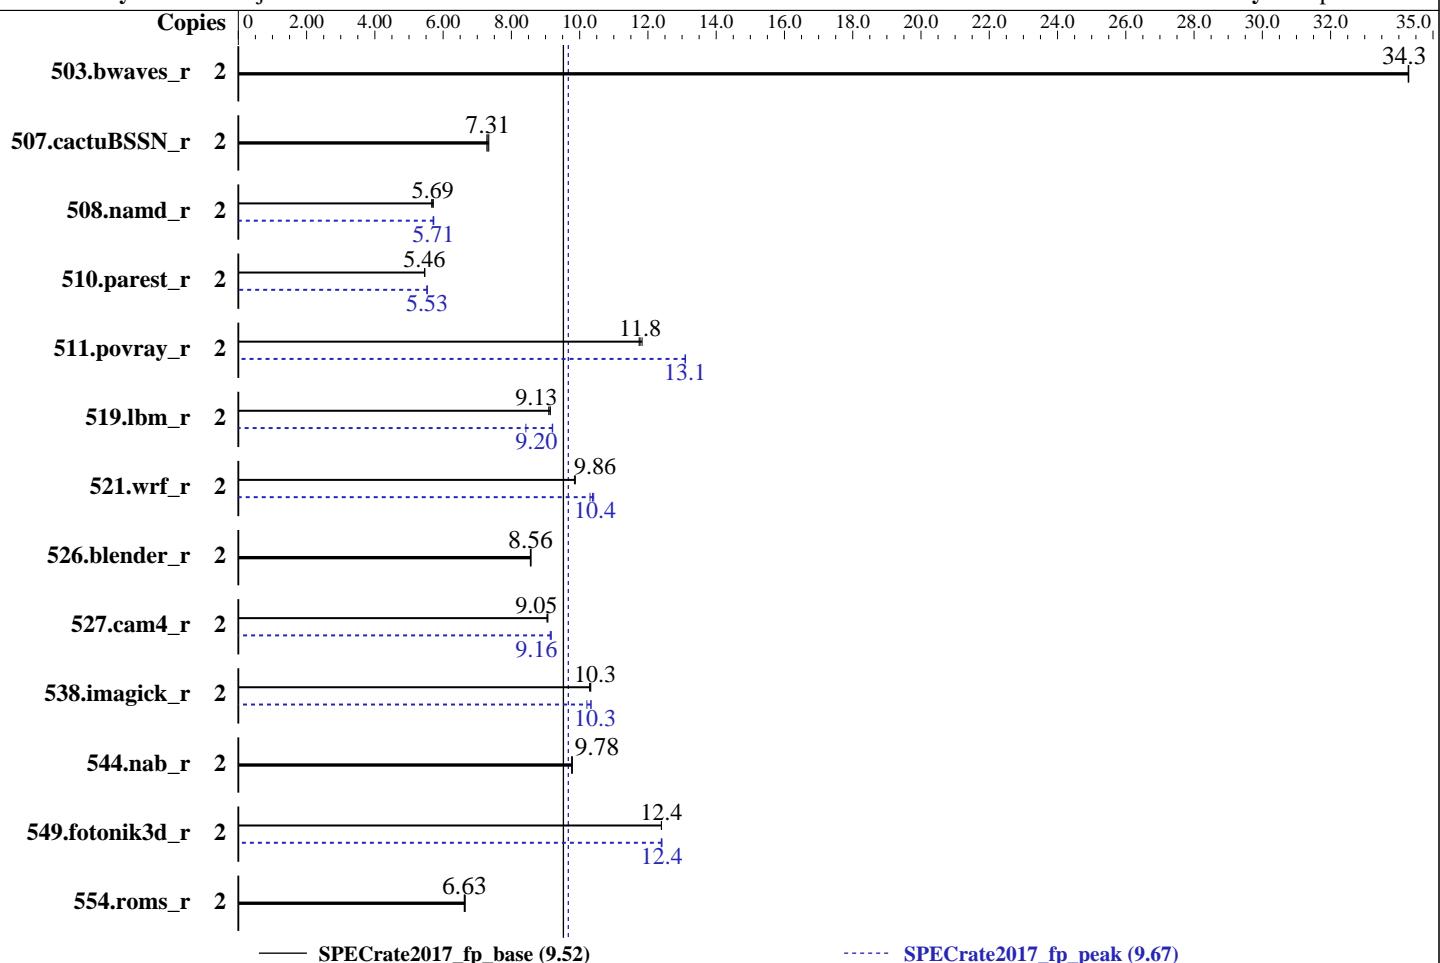

Hardware		Software	
CPU Name:	Intel Pentium G3930	OS:	SUSE Linux Enterprise Server 15
Max MHz.:	2900		4.12.14-23-default
Nominal:	2900	Compiler:	C/C++: Version 19.0.0.117 of Intel C/C++ Compiler for Linux;
Enabled:	2 cores, 1 chip		Fortran: Version 19.0.0.117 of Intel Fortran Compiler for Linux
Orderable:	1 chip	Parallel:	No
Cache L1:	32 KB I + 32 KB D on chip per core	Firmware:	Fujitsu BIOS Version V5.0.0.11 R1.21.0 for D3375-B1x. Released Nov-2018
L2:	256 KB I+D on chip per core	File System:	xfs
L3:	2 MB I+D on chip per chip	System State:	Run level 3 (multi-user)
Other:	None	Base Pointers:	64-bit
Memory:	64 GB (4 x 16 GB 2Rx8 PC4-2400T-E, running at 2133)	Peak Pointers:	64-bit
Storage:	1 x SSD SATA 6G 128GB DOM N H-P	Other:	None
Other:	None		



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	2	585	34.3	585	34.3	585	34.3	2	585	34.3	585	34.3	585	34.3
507.cactuBSSN_r	2	346	7.31	348	7.28	345	7.34	2	346	7.31	348	7.28	345	7.34
508.namd_r	2	333	5.71	334	5.69	335	5.66	2	332	5.71	332	5.73	333	5.71
510.parest_r	2	959	5.46	959	5.45	957	5.46	2	946	5.53	946	5.53	946	5.53
511.povray_r	2	395	11.8	397	11.8	398	11.7	2	356	13.1	357	13.1	357	13.1
519.lbm_r	2	232	9.09	231	9.14	231	9.13	2	250	8.43	229	9.20	229	9.21
521.wrf_r	2	454	9.86	454	9.87	455	9.85	2	432	10.4	430	10.4	435	10.3
526.blender_r	2	356	8.56	356	8.56	355	8.58	2	356	8.56	356	8.56	355	8.58
527.cam4_r	2	387	9.05	387	9.05	386	9.07	2	383	9.14	382	9.16	382	9.16
538.imagick_r	2	483	10.3	482	10.3	482	10.3	2	487	10.2	482	10.3	481	10.3
544.nab_r	2	344	9.78	345	9.77	344	9.78	2	344	9.78	345	9.77	344	9.78
549.fotonik3d_r	2	629	12.4	629	12.4	629	12.4	2	628	12.4	628	12.4	629	12.4
554.roms_r	2	478	6.65	480	6.63	480	6.62	2	478	6.65	480	6.63	480	6.62

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
echo always > /sys/kernel/mm/transparent_hugepage/enabled
echo 1 > /proc/sys/vm/drop_caches
echo 1000000000 > /proc/sys/kernel/sched_min_granularity_ns
echo 1500000000 > /proc/sys/kernel/sched_wakeup_granularity_ns
```

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/Benchmark/speccpu2017-1.0.5/icc19-lib/intel64"

Binaries compiled on a system with 2x Intel Xeon Silver 4108 CPU + 384GB RAM
memory using SUSE Linux Enterprise Server 12 SP2

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Fan Control = Full

Sysinfo program /home/Benchmark/speccpu2017-1.0.5/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on RX1330M3 Fri Dec 21 11:53:10 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Pentium(R) CPU G3930 @ 2.90GHz
  1 "physical id"s (chips)
  2 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 2
  siblings : 2
  physical 0: cores 0 1
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                2
On-line CPU(s) list:  0,1
Thread(s) per core:   1
Core(s) per socket:   2
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 158
Model name:            Intel(R) Pentium(R) CPU G3930 @ 2.90GHz
Stepping:               9
CPU MHz:               2900.000
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

Platform Notes (Continued)

CPU max MHz: 2900.0000

CPU min MHz: 800.0000

BogoMIPS: 5808.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 256K

L3 cache: 2048K

NUMA node0 CPU(s): 0,1

Flags: fpu vme de pse tsc msr pae cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx est tm2 ssse3 sdbg cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pt i tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust smep erms invpcid mpx rdseed smap clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves ibpb ibrs stibp dtherm arat pln pts hwp hwp_notify hwp_act_window hwp_epp ssbd

/proc/cpuinfo cache data
cache size : 2048 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)
node 0 cpus: 0 1
node 0 size: 64038 MB
node 0 free: 63596 MB
node distances:
node 0
0: 10

From /proc/meminfo
MemTotal: 65575280 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="SLES"
VERSION="15"
VERSION_ID="15"
PRETTY_NAME="SUSE Linux Enterprise Server 15"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15"

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

Platform Notes (Continued)

```
uname -a:  
Linux RX1330M3 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b) x86_64  
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation,  
IBPB, IBRS_FW
```

run-level 3 Dec 21 04:52

```
SPEC is set to: /home/Benchmark/speccpu2017-1.0.5  
Filesystem      Type  Size  Used  Avail Use% Mounted on  
/dev/sda4        xfs   80G   16G   65G  20% /home
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS FUJITSU // American Megatrends Inc. V5.0.0.11 R1.21.0 for D3375-B1x  
11/20/2018
```

Memory:
4x Samsung M391A2K43BB1-CRC 16 GB 2 rank 2400, configured at 2133

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)  
-----
```

```
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

```
=====  
CC 519.lbm_r(peak) 544.nab_r(peak)  
-----
```

```
icc (ICC) 19.0.0.117 20180804  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.  
-----
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

Compiler Version Notes (Continued)

CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(peak) 510.parest_r(peak)

=====

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(base) 526.blender_r(base)

=====

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 511.povray_r(peak) 526.blender_r(peak)

=====

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN_r(base)

=====

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

ifort (IFORT) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 507.cactubSSN_r(peak)

=====

icpc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

Compiler Version Notes (Continued)

icc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

ifort (IFORT) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

=====

ifort (IFORT) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

FC 554.roms_r(peak)

=====

ifort (IFORT) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

=====

ifort (IFORT) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

=====

ifort (IFORT) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

icc (ICC) 19.0.0.117 20180804

Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactuBSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-xsse4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xsse4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xsse4.2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2018

Hardware Availability: May-2017

Software Availability: Sep-2018

Peak Optimization Flags (Continued)

519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xsse4.2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

538.imagick_r: -xsse4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3

544.nab_r: basepeak = yes

C++ benchmarks:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xsse4.2 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3

Fortran benchmarks:

503.bwaves_r: basepeak = yes

549.fotonik3d_r: -xsse4.2 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

554.roms_r: basepeak = yes

Benchmarks using both Fortran and C:

-prof-gen(pass 1) -prof-use(pass 2) -ipo -xsse4.2 -O3 -no-prec-div
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=3
-nostandard-realloc-lhs -align array32byte

Benchmarks using both C and C++:

511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xsse4.2 -O3
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-mem-layout-trans=3

526.blender_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.html>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.html>



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY RX1330 M3, Intel Pentium G3930,
2.90GHz

SPECrate2017_fp_base = 9.52

SPECrate2017_fp_peak = 9.67

CPU2017 License: 19

Test Date: Dec-2018

Test Sponsor: Fujitsu

Hardware Availability: May-2017

Tested by: Fujitsu

Software Availability: Sep-2018

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-12-21.xml>

<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.2-BDW-RevF.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2018-12-20 21:53:09-0500.

Report generated on 2019-01-08 16:44:15 by CPU2017 PDF formatter v6067.

Originally published on 2019-01-08.