



SPEC® CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.35 GHz, AMD EPYC 7452)

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3


Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: Aug-2019

Tested by: HPE

Software Availability: Jun-2019

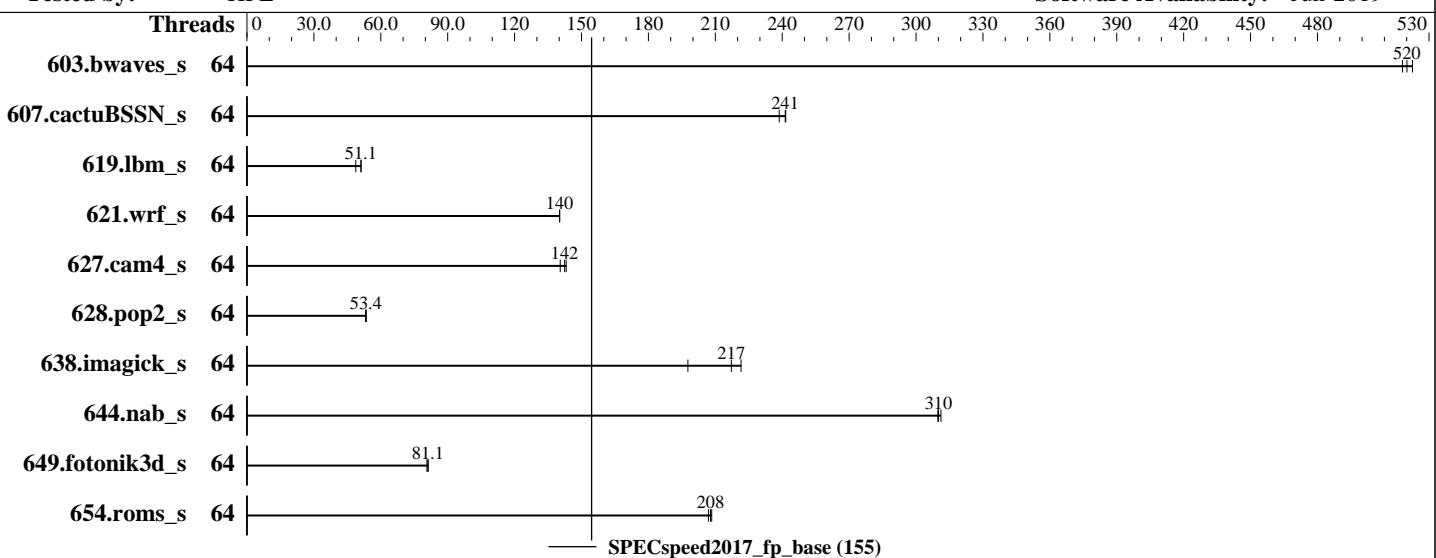

Hardware

CPU Name: AMD EPYC 7452
 Max MHz.: 3350
 Nominal: 2350
 Enabled: 64 cores, 2 chips
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 512 KB I+D on chip per core
 L3: 128 MB I+D on chip per chip, 16 MB shared / 4 cores
 Other: None
 Memory: 1 TB (16 x 64 GB 4Rx4 PC4-2933Y-L)
 Storage: 1 x 400 GB SAS SSD, RAID 0
 Other: None

Software

OS: SUSE Linux Enterprise Server 15 (x86_64) SP1
 Compiler: Kernel 4.12.14-195-default
 C/C++: Version 1.3.0 of AOCC
 Fortran: Version 4.8.2 of GCC
 Parallel: Yes
 Firmware: HPE BIOS Version A40 07/11/2019 released Aug-2019
 File System: xfs
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: Not Applicable
 Other: jemalloc: jemalloc memory allocator library V5.1.0;



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.35 GHz, AMD EPYC 7452)

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Jun-2019

Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads
603.bwaves_s	64	113	523	<u>113</u>	<u>520</u>	114	518									
607.cactuBSSN_s	64	69.0	242	<u>69.1</u>	<u>241</u>	69.8	239									
619.lbm_s	64	107	48.8	<u>102</u>	<u>51.1</u>	102	51.2									
621.wrf_s	64	94.4	140	94.3	140	<u>94.4</u>	<u>140</u>									
627.cam4_s	64	63.1	140	<u>62.2</u>	<u>142</u>	61.9	143									
628.pop2_s	64	222	53.5	223	53.2	<u>222</u>	<u>53.4</u>									
638.imagick_s	64	73.0	198	<u>66.4</u>	<u>217</u>	65.1	222									
644.nab_s	64	56.2	311	<u>56.3</u>	<u>310</u>	56.4	310									
649.fotonik3d_s	64	<u>112</u>	<u>81.1</u>	112	81.2	113	80.7									
654.roms_s	64	75.6	208	<u>75.8</u>	<u>208</u>	76.1	207									
SPECspeed2017_fp_base = 155																
SPECspeed2017_fp_peak = Not Run																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

The AOCC Fortran Plugin version 1.3.0 was used to leverage AOCC optimizers with gfortran. It is available here:
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

Set dirty_ratio=8 to limit dirty cache to 8% of memory
 Set swappiness=1 to swap only if necessary
 Set zone_reclaim_mode=1 to free local node memory and avoid remote memory sync then drop_caches=3 to reset caches before invoking runcpu

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL385 Gen10 (2.35 GHz, AMD EPYC 7452)	SPECspeed2017_fp_base = 155
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3	Test Date: Jul-2019
Test Sponsor: HPE	Hardware Availability: Aug-2019
Tested by: HPE	Software Availability: Jun-2019

Operating System Notes (Continued)

dirty_ratio, swappiness, zone_reclaim_mode and drop_caches were all set using privileged echo (e.g. echo 1 > /proc/sys/vm/swappiness).

Transparent huge pages set to 'always' for this run (OS default)

General Notes

Environment variables set by runcpu before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2017/amd_speed_aocc130_naples_A/lib/64;
"/home/cpu2017/amd_speed_aocc130_naples_A/lib/32:
OMP_DYNAMIC = "false"
OMP_PLACES = "cores"
OMP_PROC_BIND = "close"
OMP_SCHEDULE = "static"
OMP_STACKSIZE = "192M"
OMP_WAIT_POLICY = "active"

Binaries were compiled on a system with 2p AMD EPYC 7601 CPU + 512GB Memory using RHEL 7.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.5 in RHEL v7.2 under default conditions.
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

Platform Notes

BIOS Configuration
Thermal Configuration set to Maximum Cooling
AMD SMT Option set to Disabled
Determinism Control set to Manual
Performance Determinism set to Power Deterministic
Minimum Processor Idle Power Core C-State set to C6 State
Memory Patrol Scrubbing set to Disabled
Workload Profile set to General Peak Frequency Compute
NUMA memory domains per socket set to One memory domains per socket
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9
running on dl385gen10-rome-32c Thu Jul 18 05:08:36 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL385 Gen10 (2.35 GHz, AMD EPYC 7452)	SPECspeed2017_fp_base = 155
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3	Test Date: Jul-2019
Test Sponsor: HPE	Hardware Availability: Aug-2019
Tested by: HPE	Software Availability: Jun-2019

Platform Notes (Continued)

From /proc/cpuinfo

```

model name : AMD EPYC 7452 32-Core Processor
  2 "physical id"s (chips)
  64 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings : 32
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31

```

From lscpu:

```

Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
Address sizes:          48 bits physical, 48 bits virtual
CPU(s):                 64
On-line CPU(s) list:   0-63
Thread(s) per core:    1
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):           2
Vendor ID:              AuthenticAMD
CPU family:             23
Model:                  49
Model name:             AMD EPYC 7452 32-Core Processor
Stepping:                0
CPU MHz:                 2350.000
CPU max MHz:            2350.0000
CPU min MHz:            1500.0000
BogoMIPS:                4691.36
Virtualization:         AMD-V
L1d cache:               32K
L1i cache:               32K
L2 cache:                 512K
L3 cache:                 16384K
NUMA node0 CPU(s):      0-31
NUMA node1 CPU(s):      32-63
Flags:      fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl xtopology nonstop_tsc cpuid extd_apicid aperfmpfperf pnpi
pclmulqdq monitor ssse3 fma cx16 sse4_1 sse4_2 movbe popcnt aes xsave avx f16c
rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_l2 mwaitx cpb

```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.35 GHz, AMD EPYC 7452)

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Jun-2019

Platform Notes (Continued)

```
cat_13 cdp_13 hw_pstate ssbd ibrs ibpb stibp vmmcall fsgsbase bmi1 avx2 smep bmi2
cqm rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves
cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local clzero irperf xsaveerptr arat npt
lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmlload vgif umip rdpid overflow_recov succor smca
```

```
/proc/cpuinfo cache data
cache size : 512 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31
node 0 size: 515755 MB
node 0 free: 515122 MB
node 1 cpus: 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56
57 58 59 60 61 62 63
node 1 size: 515878 MB
node 1 free: 515542 MB
node distances:
node 0 1
0: 10 32
1: 32 10
```

From /proc/meminfo

```
MemTotal: 1056393464 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux dl385gen10-rome-32c 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019
(8fba516) x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.35 GHz, AMD EPYC 7452)

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: Aug-2019

Tested by: HPE

Software Availability: Jun-2019

Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling

run-level 3 Jul 18 05:07

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	btrfs	371G	59G	311G	16%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE A40 07/11/2019

Memory:

16x HPE P03054-091 64 GB 4 rank 2933

16x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Compiler Version Notes

```
=====
CC 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
-----

=====
FC 607.cactubSSN_s(base)
-----
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin
AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins
AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)
Target: x86_64-unknown-linux-gnu
Thread model: posix
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.35 GHz, AMD EPYC 7452)

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jul-2019

Hardware Availability: Aug-2019

Software Availability: Jun-2019

Compiler Version Notes (Continued)

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====

FC 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)

=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

=====

CC 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)

=====

GNU Fortran (GCC) 4.8.2

Copyright (C) 2013 Free Software Foundation, Inc.

GNU Fortran comes with NO WARRANTY, to the extent permitted by law.

You may redistribute copies of GNU Fortran

under the terms of the GNU General Public License.

For more information about these matters, see the file named COPYING

AOCC.LLVM.1.3.0.B34.2018_10_22 clang version 7.0.0 (CLANG: Jenkins

AOCC_1_3_0_Release-Build#34) (based on LLVM AOCC.LLVM.1.3.0.B34.2018_10_22)

Target: x86_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /root/work/compilers/aocc1.3.0/AOCC-1.3.0-Compiler/bin

Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

clang gfortran

Benchmarks using both Fortran and C:

clang gfortran

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL385 Gen10 (2.35 GHz, AMD EPYC 7452)	SPECspeed2017_fp_base = 155
	SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Jul-2019 Hardware Availability: Aug-2019 Software Availability: Jun-2019

Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang gfortran

Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactusBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
627.cam4_s: -DSPEC_CASE_FLAG -DSPEC_LP64
628.pop2_s: -DSPEC_CASE_FLAG -fconvert=big-endian -DSPEC_LP64
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -z muldefs -DSPEC_OPENMP -fopenmp
-fopenmp=libomp -lomp -lpthread -ldl -ljemalloc -lamdlibm
```

Fortran benchmarks:

```
-flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt=-lsr-in-nested-loop
-Wl,-plugin-opt=-enable-vectorize-compare=false -O3 -mavx -madx
-funroll-loops -ffast-math -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compare=false
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lamdlibm -lgfortran
```

Benchmarks using both Fortran and C:

```
-flto -Wl,-plugin-opt=-merge-constant
```

(Continued on next page)



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise (Test Sponsor: HPE) ProLiant DL385 Gen10 (2.35 GHz, AMD EPYC 7452)	SPECspeed2017_fp_base = 155 SPECspeed2017_fp_peak = Not Run
CPU2017 License: 3 Test Sponsor: HPE Tested by: HPE	Test Date: Jul-2019 Hardware Availability: Aug-2019 Software Availability: Jun-2019

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-Wl,-plugin-opt==lsr-in-nested-loop
-Wl,-plugin-opt==enable-vectorize-compare=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mavx -madx -funroll-loops -z muldefs
-fplugin=dragonegg.so -fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compare=false
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lamdlibm -lgfortran
```

Benchmarks using Fortran, C, and C++:

```
-std=c++98 -flto -Wl,-plugin-opt=-merge-constant
-Wl,-plugin-opt==lsr-in-nested-loop
-Wl,-plugin-opt==enable-vectorize-compare=false -O3 -ffast-math
-march=znver1 -mno-avx2 -fstruct-layout=3 -mllvm -unroll-threshold=50
-freemap-arrays -mllvm -inline-threshold=1000
-flv-function-specialization -mllvm -enable-gvn-hoist
-mllvm -function-specialize -mllvm -unroll-threshold=100
-finline-aggressive -mllvm -enable-vectorize-compare=false -mavx
-madx -funroll-loops -z muldefs -fplugin=dragonegg.so
-fplugin-arg-dragonegg-llvm-option=-merge-constant
-fplugin-arg-dragonegg-llvm-option=-enable-vectorize-compare=false
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lpthread -ldl
-ljemalloc -lamdlibm
```

Base Other Flags

C benchmarks:

```
-Wno-return-type -DUSE_OPENMP
```

Fortran benchmarks:

```
-DUSE_OPENMP -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-DUSE_OPENMP -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -DUSE_OPENMP
```



SPEC CPU2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL385 Gen10

(2.35 GHz, AMD EPYC 7452)

SPECspeed2017_fp_base = 155

SPECspeed2017_fp_peak = Not Run

CPU2017 License: 3

Test Date: Jul-2019

Test Sponsor: HPE

Hardware Availability: Aug-2019

Tested by: HPE

Software Availability: Jun-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA-I.html>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc130-flags-revA-I.xml>

<http://www.spec.org/cpu2017/flags/gcc.2017-11-20.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-V1.2-EPYC-revE.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.5 on 2019-07-18 05:08:36-0400.

Report generated on 2019-08-07 19:27:05 by CPU2017 PDF formatter v6067.

Originally published on 2019-08-07.