



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066


Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

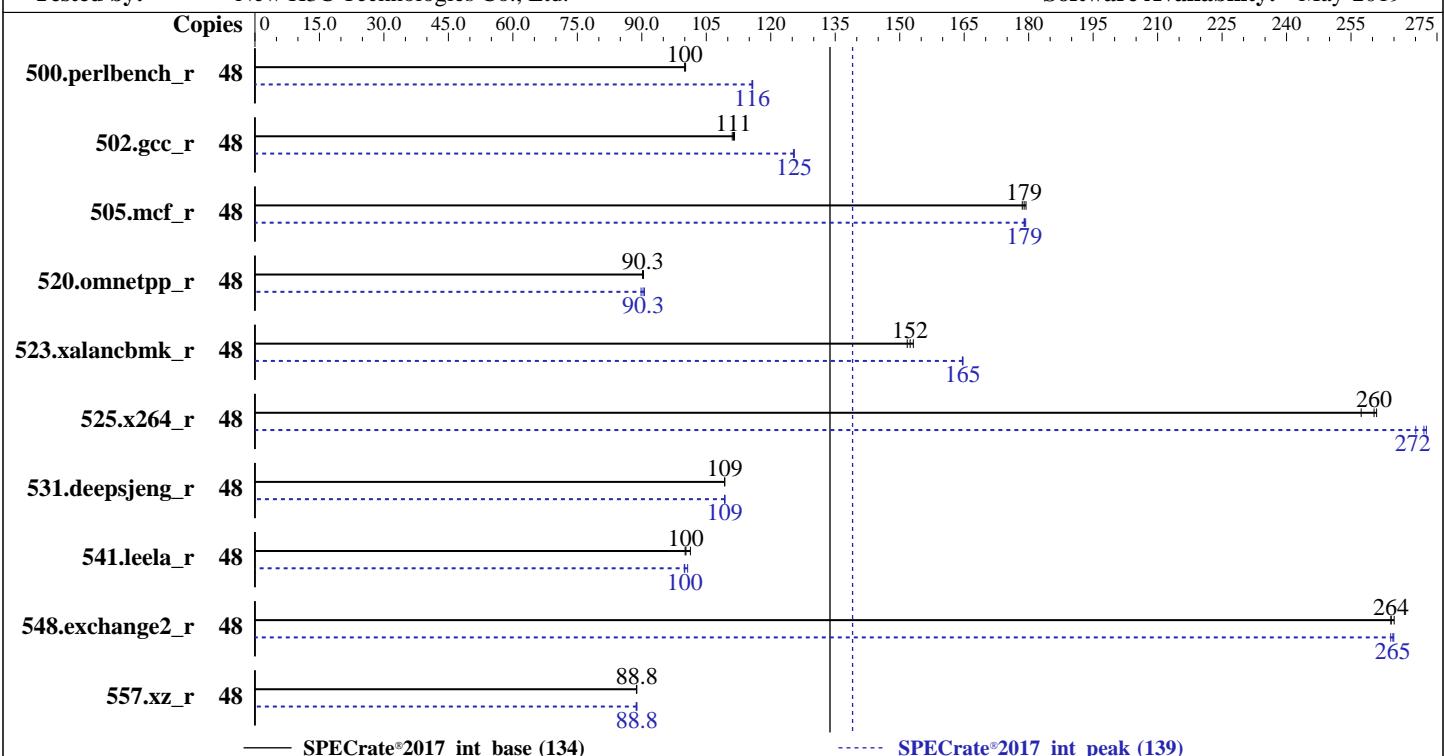

Hardware	
CPU Name:	Intel Xeon Silver 4214
Max MHz:	3200
Nominal:	2200
Enabled:	24 cores, 2 chips, 2 threads/core
Orderable:	1,2 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	1 MB I+D on chip per core
L3:	16.5 MB I+D on chip per chip
Other:	None
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2666V-R, running at 2400)
Storage:	1 x 480 GB SATA SSD
Other:	None

Software	
OS:	SUSE Linux Enterprise Server 12 SP4 4.12.14-94.41-default
Compiler:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
	Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel:	No
Firmware:	Version 2.00.32 released Aug-2019 BIOS
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other:	jemalloc memory allocator V5.0.1
Power Management:	--



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	763	100	<b>764</b>	<b>100</b>	764	100	48	660	116	661	116	<b>661</b>	<b>116</b>
502.gcc_r	48	612	111	609	112	<b>610</b>	<b>111</b>	48	<b>542</b>	<b>125</b>	543	125	<b>542</b>	125
505.mcf_r	48	432	179	<b>433</b>	<b>179</b>	435	179	48	<b>433</b>	<b>179</b>	433	179	<b>433</b>	179
520.omnetpp_r	48	<b>698</b>	<b>90.3</b>	697	90.4	698	90.2	48	701	89.8	695	90.6	<b>697</b>	<b>90.3</b>
523.xalancbmk_r	48	331	153	<b>333</b>	<b>152</b>	334	152	48	<b>308</b>	<b>165</b>	308	165	<b>308</b>	165
525.x264_r	48	322	261	<b>323</b>	<b>260</b>	327	257	48	<b>309</b>	<b>272</b>	311	270	<b>308</b>	273
531.deepsjeng_r	48	<b>503</b>	<b>109</b>	503	109	503	109	48	503	109	503	109	<b>503</b>	<b>109</b>
541.leela_r	48	<b>793</b>	<b>100</b>	794	100	785	101	48	<b>795</b>	<b>100</b>	790	101	<b>796</b>	99.9
548.exchange2_r	48	476	264	475	265	<b>476</b>	<b>264</b>	48	475	265	476	264	<b>475</b>	<b>265</b>
557.xz_r	48	584	88.8	584	88.8	<b>584</b>	<b>88.8</b>	48	583	88.9	<b>584</b>	<b>88.8</b>	<b>585</b>	88.7

SPECrate®2017\_int\_base = 134

SPECrate®2017\_int\_peak = 139

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/speccpu/lib/intel64:/home/speccpu/lib/ia32:/home/speccpu/je5.0.1-32"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## General Notes (Continued)

jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from [jemalloc.net](https://github.com/jemalloc/jemalloc/releases) or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Set LLC Prefetch to Disabled

Set XPT Prefetch to Auto

Sysinfo program /home/speccpu/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-jtlb Thu Aug 22 14:41:47 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Silver 4214 CPU @ 2.20GHz

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

From lscpu:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 2

Core(s) per socket: 12

Socket(s): 2

NUMA node(s): 2

Vendor ID: GenuineIntel

CPU family: 6

Model: 85

Model name: Intel(R) Xeon(R) Silver 4214 CPU @ 2.20GHz

Stepping: 7

CPU MHz: 2200.000

CPU max MHz: 3200.0000

CPU min MHz: 1000.0000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Platform Notes (Continued)

BogoMIPS: 4400.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 16896K  
NUMA node0 CPU(s): 0-11,24-35  
NUMA node1 CPU(s): 12-23,36-47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrandlahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqmq mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 16896 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35  
node 0 size: 191978 MB  
node 0 free: 178332 MB  
node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47  
node 1 size: 193322 MB  
node 1 free: 183052 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 394547528 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d  
SUSE Linux Enterprise Server 12 SP4

From /etc/\*release\* /etc/\*version\*

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Platform Notes (Continued)

SuSE-release:

```
SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 4
# This file is deprecated and will be removed in a future service pack or release.
# Please check /etc/os-release for details about this release.
```

os-release:

```
NAME="SLES"
VERSION="12-SP4"
VERSION_ID="12.4"
PRETTY_NAME="SUSE Linux Enterprise Server 12 SP4"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12:sp4"
```

uname -a:

```
Linux linux-jtlb 4.12.14-94.41-default #1 SMP Wed Oct 31 12:25:04 UTC 2018 (3090901)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS\_FW

run-level 3 Aug 22 11:24 last=5

SPEC is set to: /home/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfs	405G	28G	378G	7%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. 2.00.32P03 08/14/2019

Memory:

24x Hynix HMA82GR7AFR8N-VK 16 GB 2 rank 2666, configured at 2400

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk\_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Compiler Version Notes (Continued)

=====

C++ | 523.xalancbmk\_r(peak)

-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

-----

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

=====

Fortran | 548.exchange2\_r(base, peak)

-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

-----

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -DSPEC\_LP64

505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Base Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fno-optimize-sibling-calls  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fno-optimize-sibling-calls  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-fno-optimize-sibling-calls  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -D\_FILE\_OFFSET\_BITS=64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

502.gcc\_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/je5.0.1-32/lib -ljemalloc

505.mcf\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

525.x264\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

New H3C Technologies Co., Ltd.

SPECrate®2017\_int\_base = 134

H3C UniServer R4300 G3 (Intel Xeon Silver 4214)

SPECrate®2017\_int\_peak = 139

CPU2017 License: 9066

Test Date: Aug-2019

Test Sponsor: New H3C Technologies Co., Ltd.

Hardware Availability: Apr-2019

Tested by: New H3C Technologies Co., Ltd.

Software Availability: May-2019

## Peak Optimization Flags (Continued)

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.html](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>

[http://www.spec.org/cpu2017/flags/New\\_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.xml](http://www.spec.org/cpu2017/flags/New_H3C-Platform-Settings-V1.3-SKL-RevD.2019-09-03.xml)

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-22 02:41:46-0400.

Report generated on 2019-09-17 16:04:07 by CPU2017 PDF formatter v6255.

Originally published on 2019-09-17.