



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

**SPECrate®2017\_int\_base = 54.2**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

**Test Date:** Aug-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Aug-2019

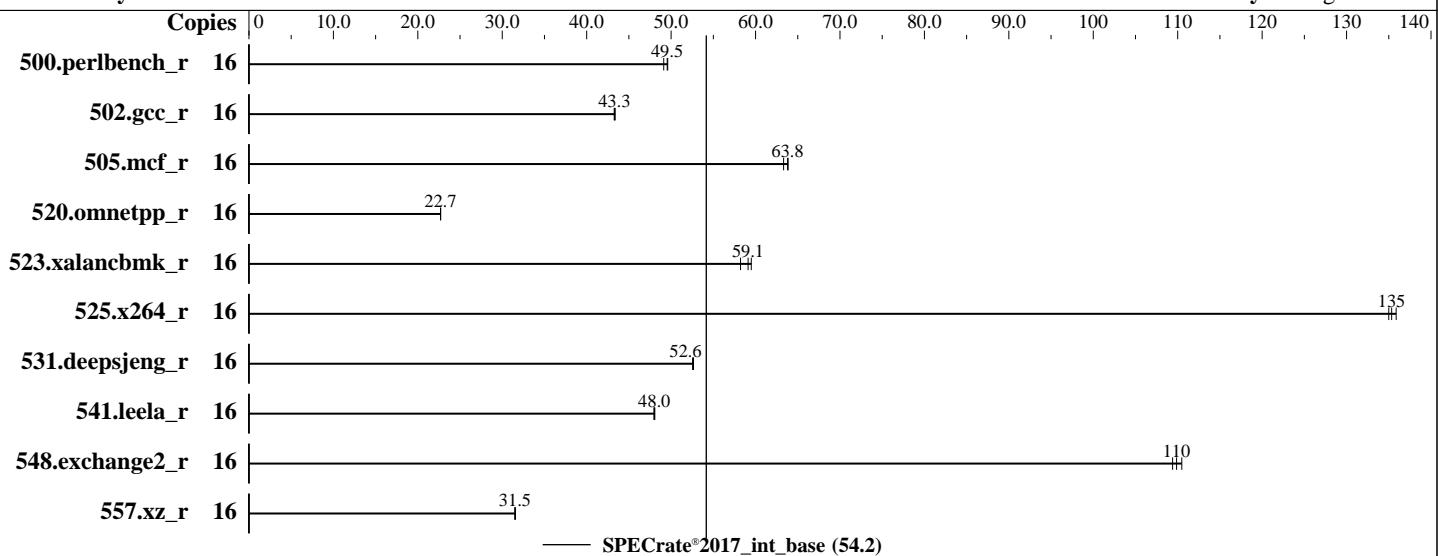

## Hardware

CPU Name: Intel Xeon E-2278G  
 Max MHz: 5000  
 Nominal: 3400  
 Enabled: 8 cores, 1 chip, 2 threads/core  
 Orderable: 1 chip(s)  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 16 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-U)  
 Storage: 1 x 400 GB SATA SSD, RAID 0  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 (x86\_64) SP1  
 Compiler: Kernel 4.12.14-195-default  
 C/C++: Version 19.0.1.144 of Intel C/C++ Compiler Build 20181018 for Linux;  
 Fortran: Version 19.0.1.144 of Intel Fortran Compiler Build 20181018 for Linux  
 Parallel: No  
 Firmware: HPE BIOS Version U43 08/16/2019 released Aug-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

**SPECrate®2017\_int\_base = 54.2**

**SPECrate®2017\_int\_peak = Not Run**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Aug-2019

**Hardware Availability:** Aug-2019

**Software Availability:** Aug-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	16	<b>514</b>	<b>49.5</b>	514	49.6	518	49.1							
502.gcc_r	16	522	43.4	<b>523</b>	<b>43.3</b>	524	43.3							
505.mcf_r	16	405	63.9	<b>405</b>	<b>63.8</b>	408	63.3							
520.omnetpp_r	16	925	22.7	925	22.7	<b>925</b>	<b>22.7</b>							
523.xalancbmk_r	16	284	59.5	290	58.2	<b>286</b>	<b>59.1</b>							
525.x264_r	16	<b>207</b>	<b>135</b>	208	135	206	136							
531.deepsjeng_r	16	348	52.7	<b>348</b>	<b>52.6</b>	349	52.5							
541.leela_r	16	552	48.0	<b>552</b>	<b>48.0</b>	551	48.1							
548.exchange2_r	16	<b>382</b>	<b>110</b>	383	109	379	110							
557.xz_r	16	547	31.6	<b>548</b>	<b>31.5</b>	549	31.5							

**SPECrate®2017\_int\_base = 54.2**

**SPECrate®2017\_int\_peak = Not Run**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The taskset mechanism was used to bind copies to processors. The config file option 'submit' was used to generate taskset commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/ia32:/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-32:/home/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECrate®2017\_int\_base = 54.2

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## General Notes (Continued)

is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

Thermal Configuration set to Maximum Cooling

LLC prefetch set to Enabled

Workload Profile set to General Throughput Compute

Minimum Processor Idle Power Core C-State set to C1E

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on linux-vb4y Tue Aug 27 05:28:55 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2278G CPU @ 3.40GHz
  1 "physical id"s (chips)
  16 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 1 2 3 4 5 6 7
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         39 bits physical, 48 bits virtual
CPU(s):                16
On-line CPU(s) list:  0-15
Thread(s) per core:   2
Core(s) per socket:   8
Socket(s):             1
NUMA node(s):          1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 158
Model name:            Intel(R) Xeon(R) E-2278G CPU @ 3.40GHz
Stepping:               13
CPU MHz:                3400.000
BogoMIPS:              6816.00
Virtualization:        VT-x
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECrate®2017\_int\_base = 54.2

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

L1d cache: 32K  
L1i cache: 32K  
L2 cache: 256K  
L3 cache: 16384K  
NUMA node0 CPU(s): 0-15  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpf perf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cxl16 xtpr pdcm pcid sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb invpcid\_single ssbd ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel\_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts md\_clear flush\_l1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 16384 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 1 nodes (0)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
node 0 size: 64020 MB  
node 0 free: 63396 MB  
node distances:  
node 0  
0: 10

From /proc/meminfo  
MemTotal: 65556772 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="SLES"  
VERSION="15-SP1"  
VERSION\_ID="15.1"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP1"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:15:sp1"

uname -a:  
Linux linux-vb4y 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECrate®2017\_int\_base = 54.2

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Platform Notes (Continued)

x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2017-5754 (Meltdown): Not affected

CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Aug 27 05:08

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	270G	50G	220G	19%	/home

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HPE U43 08/16/2019

Memory:

4x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base)  
| 525.x264\_r(base) 557.xz\_r(base)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

=====

C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base)  
| 541.leela\_r(base)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

=====

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECrate®2017\_int\_base = 54.2

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Compiler Version Notes (Continued)

Fortran | 548.exchange2\_r(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.1.144 Build 20181018  
Copyright (C) 1985-2018 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-fopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers\_and\_libraries\_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL20 Gen10

(3.40 GHz, Intel Xeon E-2278G)

SPECrate®2017\_int\_base = 54.2

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Aug-2019

Hardware Availability: Aug-2019

Software Availability: Aug-2019

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.1.144/linux/compiler/lib/intel64  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-V1.2-CLX-revB.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.0.5 on 2019-08-27 05:28:55-0400.

Report generated on 2019-11-08 14:22:04 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-08.