



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55


Test Date: Oct-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

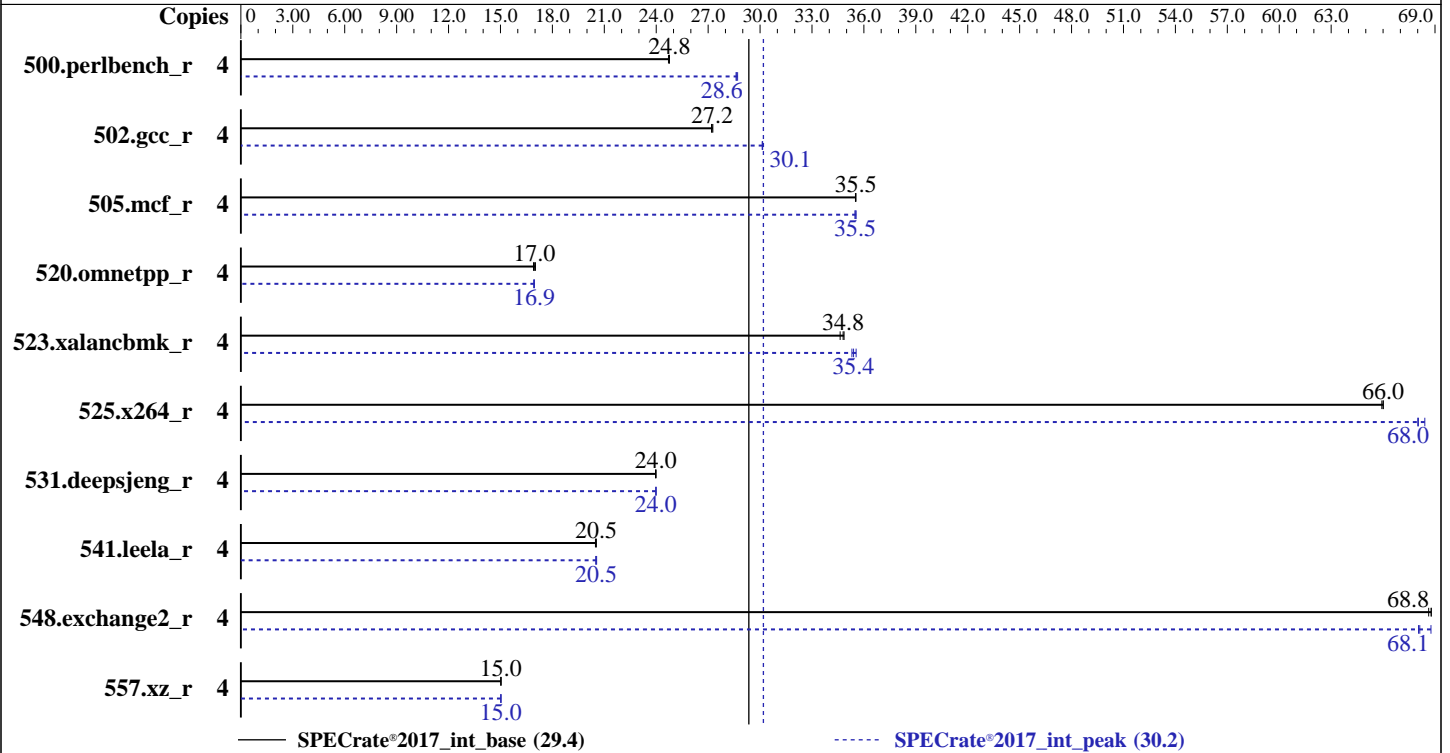

### Hardware

CPU Name: Intel Xeon E-2224G  
 Max MHz: 4700  
 Nominal: 3500  
 Enabled: 4 cores, 1 chip  
 Orderable: 1 chip  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 256 KB I+D on chip per core  
 L3: 8 MB I+D on chip per chip  
 Other: None  
 Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP1  
 kernel 4.12.14-195-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler Build 20190416 for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler Build 20190416 for Linux  
 Parallel: No  
 Firmware: Version 2.1.3 released Nov-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 jemalloc memory allocator V5.0.1  
 Power Management: --



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2019  
Hardware Availability: Dec-2019  
Software Availability: Jun-2019

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	4	257	24.8	258	24.7	<b>257</b>	<b>24.8</b>	4	222	28.7	<b>222</b>	<b>28.6</b>	222	28.6
502.gcc_r	4	208	27.3	<b>208</b>	<b>27.2</b>	208	27.2	4	188	30.2	188	30.1	<b>188</b>	<b>30.1</b>
505.mcf_r	4	<b>182</b>	<b>35.5</b>	182	35.5	182	35.5	4	<b>182</b>	<b>35.5</b>	182	35.5	182	35.6
520.omnetpp_r	4	<b>309</b>	<b>17.0</b>	310	16.9	308	17.0	4	309	17.0	<b>310</b>	<b>16.9</b>	310	16.9
523.xalancbmk_r	4	122	34.6	121	34.9	<b>121</b>	<b>34.8</b>	4	119	35.6	120	35.3	<b>119</b>	<b>35.4</b>
525.x264_r	4	106	65.9	106	66.0	<b>106</b>	<b>66.0</b>	4	<b>103</b>	<b>68.0</b>	102	68.4	103	68.0
531.deepsjeng_r	4	<b>191</b>	<b>24.0</b>	191	24.0	191	24.0	4	<b>191</b>	<b>24.0</b>	191	24.0	191	24.0
541.leela_r	4	<b>323</b>	<b>20.5</b>	323	20.5	323	20.5	4	323	20.5	322	20.6	<b>323</b>	<b>20.5</b>
548.exchange2_r	4	<b>152</b>	<b>68.8</b>	153	68.6	152	68.8	4	154	68.0	<b>154</b>	<b>68.1</b>	152	68.8
557.xz_r	4	<b>287</b>	<b>15.0</b>	287	15.0	288	15.0	4	287	15.0	<b>288</b>	<b>15.0</b>	288	15.0

SPECrate®2017\_int\_base = 29.4

SPECrate®2017\_int\_peak = 30.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
"/home/cpu2017/ODM-SPECcpu2017-194/cpu2017/lib/intel64:/home/cpu2017/ODM-SPECcpu2017-194/cpu2017/lib/ia32:/home/cpu2017/ODM-SPECcpu2017-194/cpu2017/je5.0.1-32"
```

## General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## General Notes (Continued)

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

CPU Interconnect Bus Link Power Management enabled

PCI ASPM L1 Link Power Management enabled

Sysinfo program /home/cpu2017/ODM-SPECcpu2017-194/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on linux-g3ob Mon Oct 28 08:27:06 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2224G CPU @ 3.50GHz
```

```
1 "physical id"s (chips)
```

```
4 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 4
```

```
siblings : 4
```

```
physical 0: cores 0 1 2 3
```

From lscpu:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Platform Notes (Continued)

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
Address sizes:         39 bits physical, 48 bits virtual
CPU(s):                4
On-line CPU(s) list:  0-3
Thread(s) per core:   1
Core(s) per socket:   4
Socket(s):             1
NUMA node(s):         1
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 158
Model name:            Intel(R) Xeon(R) E-2224G CPU @ 3.50GHz
Stepping:              10
CPU MHz:               3500.000
BogoMIPS:              7008.00
Virtualization:       VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              256K
L3 cache:              8192K
NUMA node0 CPU(s):    0-3
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3
sdbg fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer
aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single
pti ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust
bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt
xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts md_clear flush_lld

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3
node 0 size: 64259 MB
node 0 free: 63701 MB
node distances:
node 0
0: 10

```

```

From /proc/meminfo

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Platform Notes (Continued)

MemTotal: 65801564 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP1"
VERSION_ID="15.1"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP1"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp1"
```

uname -a:

```
Linux linux-g3ob 4.12.14-195-default #1 SMP Tue May 7 10:55:11 UTC 2019 (8fba516)
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault): Mitigation: PTE Inversion; VMX: conditional cache flushes, SMT disabled  
Microarchitectural Data Sampling: Mitigation: Clear CPU buffers; SMT disabled  
CVE-2017-5754 (Meltdown): Mitigation: PTI  
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
CVE-2017-5753 (Spectre variant 1): Mitigation: \_\_user pointer sanitization  
CVE-2017-5715 (Spectre variant 2): Mitigation: Indirect Branch Restricted Speculation, IBPB: conditional, IBRS\_FW, STIBP: disabled, RSB filling

run-level 3 Oct 28 06:54 last=5

SPEC is set to: /home/cpu2017/ODM-SPECcpu2017-194/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda2 xfs 440G 28G 413G 7% /

From /sys/devices/virtual/dmi/id  
BIOS: Dell Inc. 2.1.3 09/27/2018  
Vendor: Dell Inc.  
Product: PowerEdge T140  
Product Family: PowerEdge

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Oct-2019  
Hardware Availability: Dec-2019  
Software Availability: Jun-2019

## Platform Notes (Continued)

frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x 00AD00000A02 HMA82GU7CJR8N-VK 16 GB 2 rank 2666

2x 00AD00000A07 HMA82GU7CJR8N-VK 16 GB 2 rank 2666

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 502.gcc\_r(peak)  
-----

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version  
19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
525.x264\_r(base, peak) 557.xz\_r(base, peak)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 523.xalanbmk\_r(peak)  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55

Test Date: Oct-2019

Test Sponsor: Dell Inc.

Hardware Availability: Dec-2019

Tested by: Dell Inc.

Software Availability: Jun-2019

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C++      | 523.xalancbmk_r(peak)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
C++      | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)  
         | 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)  
-----
```

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

```
=====  
Fortran  | 548.exchange2_r(base, peak)  
-----
```

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.0.4.227 Build 20190416  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

```
502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin
```

Fortran benchmarks:

```
ifort -m64
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
```

```
502.gcc_r: -D_FILE_OFFSET_BITS=64
```

```
505.mcf_r: -DSPEC_LP64
```

```
520.omnetpp_r: -DSPEC_LP64
```

```
523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX
```

```
525.x264_r: -DSPEC_LP64
```

```
531.deepsjeng_r: -DSPEC_LP64
```

```
541.leela_r: -DSPEC_LP64
```

```
548.exchange2_r: -DSPEC_LP64
```

```
557.xz_r: -DSPEC_LP64
```

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-fno-strict-overflow
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
```

```
-lqkmalloc
```

```
502.gcc_r: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
```

```
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Oct-2019

Hardware Availability: Dec-2019

Software Availability: Jun-2019

## Peak Optimization Flags (Continued)

505.mcf\_r (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmallocc
```

525.x264\_r: -Wl, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4 -fno-alias
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmallocc
```

557.xz\_r: Same as 505.mcf\_r

C++ benchmarks:

520.omnetpp\_r: -Wl, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div

```
-qopt-mem-layout-trans=4
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmallocc
```

523.xalancbmk\_r: -Wl, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo

```
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
```

```
-L/usr/local/je5.0.1-32/lib -ljemallocc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-Wl, -z, muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
```

```
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
```

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmallocc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE6.xml>



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 29.4

PowerEdge T140 (Intel Xeon E-2224G, 3.50 GHz)

SPECrate®2017\_int\_peak = 30.2

**CPU2017 License:** 55

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Oct-2019

**Hardware Availability:** Dec-2019

**Software Availability:** Jun-2019

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-28 08:27:05-0400.

Report generated on 2019-11-26 12:52:29 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-26.