



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation


SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

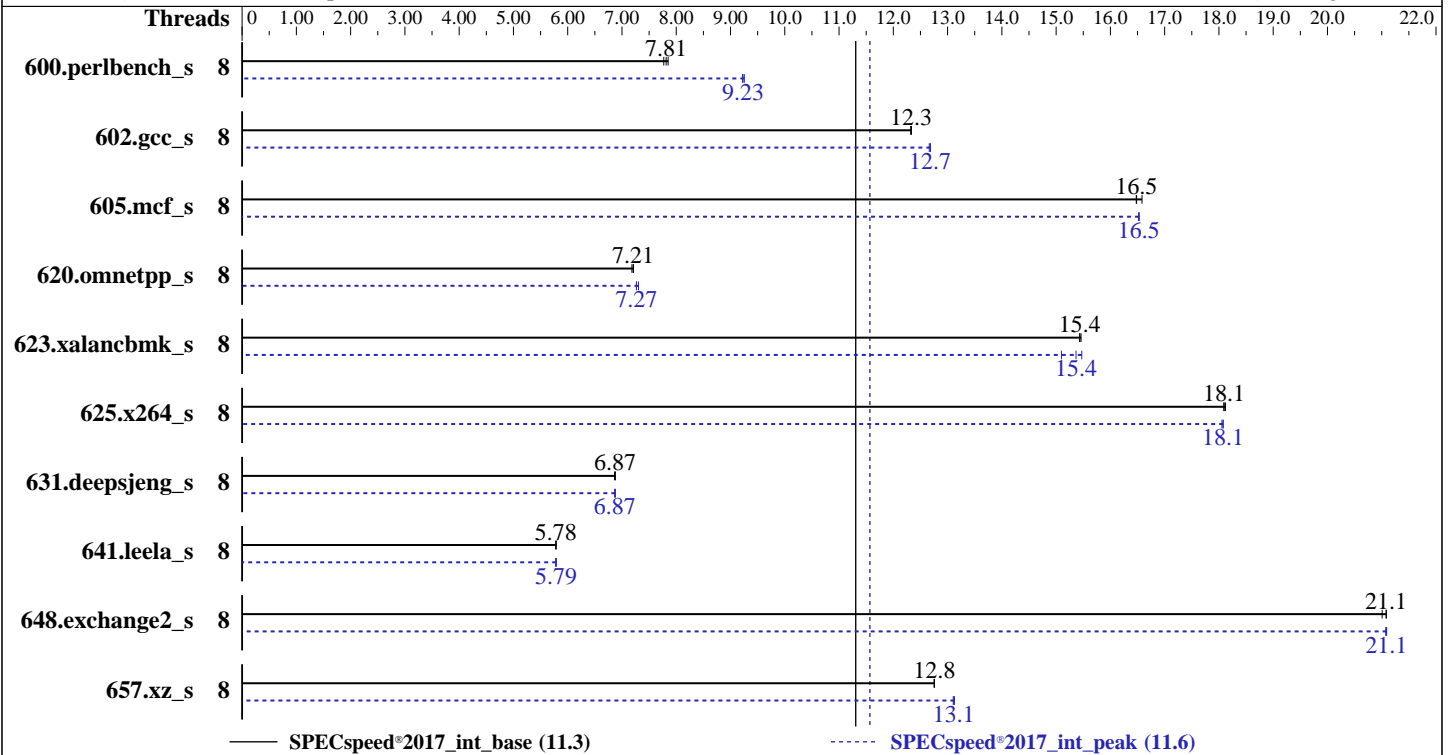

Hardware

CPU Name: Intel Xeon E-2234
Max MHz: 4800
Nominal: 3600
Enabled: 4 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 256 KB I+D on chip per core
L3: 8 MB I+D on chip per chip
Other: None
Memory: 64 GB (4 x 16 GB 2Rx8 PC4-2666V-E)
Storage: 1 x 1 TB SATA, 7200 RPM
Other: None

Software

OS: Red Hat Enterprise Linux Server release 7.7 (Maipo)
Kernel 3.10.0-1062.el7.x86_64
Compiler: C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Parallel: Yes
Firmware: NEC BIOS Version F01 08/21/2019 released Nov-2019
File System: ext4
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: jemalloc memory allocator V5.0.1
Power Management: --



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	8	228	7.77	<u>227</u>	<u>7.81</u>	226	7.85	8	192	9.25	<u>192</u>	<u>9.23</u>	193	9.22
602.gcc_s	8	323	12.3	323	12.3	<u>323</u>	<u>12.3</u>	8	315	12.7	<u>314</u>	<u>12.7</u>	314	12.7
605.mcf_s	8	287	16.5	<u>286</u>	<u>16.5</u>	285	16.6	8	286	16.5	286	16.5	<u>286</u>	<u>16.5</u>
620.omnetpp_s	8	<u>226</u>	<u>7.21</u>	226	7.21	227	7.18	8	223	7.30	<u>224</u>	<u>7.27</u>	224	7.27
623.xalancbmk_s	8	91.7	15.5	91.8	15.4	<u>91.8</u>	<u>15.4</u>	8	<u>92.2</u>	<u>15.4</u>	91.6	15.5	93.9	15.1
625.x264_s	8	<u>97.5</u>	<u>18.1</u>	97.3	18.1	97.5	18.1	8	97.6	18.1	97.7	18.1	<u>97.6</u>	<u>18.1</u>
631.deepsjeng_s	8	209	6.86	<u>208</u>	<u>6.87</u>	208	6.88	8	208	6.88	<u>209</u>	<u>6.87</u>	209	6.87
641.leela_s	8	<u>295</u>	<u>5.78</u>	295	5.78	295	5.79	8	<u>295</u>	<u>5.79</u>	295	5.78	295	5.79
648.exchange2_s	8	139	21.1	140	21.0	<u>139</u>	<u>21.1</u>	8	140	21.1	<u>139</u>	<u>21.1</u>	139	21.1
657.xz_s	8	485	12.8	485	12.8	<u>485</u>	<u>12.8</u>	8	471	13.1	472	13.1	<u>471</u>	<u>13.1</u>

SPECspeed®2017_int_base = **11.3**

SPECspeed®2017_int_peak = **11.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"
OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5
Transparent Huge Pages enabled by default
Prior to runcpu invocation
Filesystem page cache synced and cleared with:
sync; echo 3 > /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

VT-x: Disabled

Energy Efficient P-state: Disabled

Energy Efficient Turbo: Disabled

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011

running on t110js Thu Nov 14 11:16:45 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) E-2234 CPU @ 3.60GHz

1 "physical id"s (chips)

8 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 4

siblings : 8

physical 0: cores 0 1 2 3

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

CPU(s): 8

On-line CPU(s) list: 0-7

Thread(s) per core: 2

Core(s) per socket: 4

Socket(s): 1

NUMA node(s): 1

Vendor ID: GenuineIntel

CPU family: 6

Model: 158

Model name: Intel(R) Xeon(R) E-2234 CPU @ 3.60GHz

Stepping: 10

CPU MHz: 4619.311

CPU max MHz: 4800.0000

CPU min MHz: 800.0000

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```

BogoMIPS:          7200.00
Virtualization:    VT-x
L1d cache:         32K
L1i cache:         32K
L2 cache:          256K
L3 cache:          8192K
NUMA node0 CPU(s): 0-7
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
aperfmpperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
xsave avx fl6c rdrand lahf_lm abm 3dnowprefetch intel_pt ssbd ibrs ibpb stibp
tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
erms invpcid rtm mpx rdseed adx smap clflushopt xsaveopt xsavec xgetbv1 dtherm ida
arat pln pts hwp hwp_notify hwp_act_window hwp_epp md_clear spec_ctrl intel_stibp
flush_llid

```

```

/proc/cpuinfo cache data
cache size : 8192 KB

```

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a
physical chip.

```

```

available: 1 nodes (0)
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 65283 MB
node 0 free: 63390 MB
node distances:
node    0
0:     10

```

```

From /proc/meminfo
MemTotal:        65718344 kB
HugePages_Total: 0
Hugepagesize:    2048 kB

```

```

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server
```

```
uname -a:
Linux t110js 3.10.0-1062.el7.x86_64 #1 SMP Thu Jul 18 20:25:13 UTC 2019 x86_64 x86_64
x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	Mitigation: PTE Inversion
Microarchitectural Data Sampling:	Mitigation: Clear CPU buffers; SMT vulnerable
CVE-2017-5754 (Meltdown):	Mitigation: PTI
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: Load fences, __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full retpoline, IBPB

```
run-level 3 Nov 14 11:11
```

```
SPEC is set to: /home/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda3        ext4  908G   79G  783G  10% /
```

```
From /sys/devices/virtual/dmi/id
BIOS:      American Megatrends Inc. F01 08/21/2019
Vendor:    NEC
Product:   Express5800/T110j-S [N8100-2801Y]
Serial:    0000002
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:
4x Samsung M391A2K43BB1-CTD 16 GB 2 rank 2667

(End of data from sysinfo program)

Compiler Version Notes

```
=====  
C      | 600.perlbench_s(base, peak) 602.gcc_s(base, peak) 605.mcf_s(base,  
      | peak) 625.x264_s(base, peak) 657.xz_s(base, peak)  
=====
```

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006
Test Sponsor: NEC Corporation
Tested by: NEC Corporation

Test Date: Nov-2019
Hardware Availability: Nov-2019
Software Availability: Aug-2019

Compiler Version Notes (Continued)

Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
C++ | 620.omnetpp_s(base, peak) 623.xalancbmk_s(base, peak)
| 631.deepsjeng_s(base, peak) 641.leela_s(base, peak)
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base, peak)
=====

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icc -m64 -std=c11

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Base Portability Flags

600.perlbenc_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Base Portability Flags (Continued)

657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Peak Optimization Flags

C benchmarks:

```
600.perlbench_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -fno-strict-overflow
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
602.gcc_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
605.mcf_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
625.x264_s: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

```
657.xz_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -O2
-xCORE-AVX2 -qopt-mem-layout-trans=4 -ipo -O3
-no-prec-div -DSPEC_SUPPRESS_OPENMP -qopenmp
-DSPEC_OPENMP -L/usr/local/je5.0.1-64/lib -ljemalloc
```

C++ benchmarks:

```
620.omnetpp_s: -w1,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo
-xCORE-AVX2 -O3 -no-prec-div -qopt-mem-layout-trans=4
-DSPEC_SUPPRESS_OPENMP
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

```
623.xalancbmk_s: -w1,-z,muldefs -xCORE-AVX2 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc
```

631.deepsjeng_s: Same as 623.xalancbmk_s

641.leela_s: Same as 623.xalancbmk_s

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-mem-layout-trans=4
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

NEC Corporation

SPECspeed®2017_int_base = 11.3

Express5800/T110j-S (Intel Xeon E-2234)

SPECspeed®2017_int_peak = 11.6

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Nov-2019

Hardware Availability: Nov-2019

Software Availability: Aug-2019

Peak Optimization Flags (Continued)

Fortran benchmarks (continued):

-nostandard-realloc-lhs

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevF.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0u1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-T110j-RevF.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2019-11-13 21:16:45-0500.

Report generated on 2019-12-10 14:58:27 by CPU2017 PDF formatter v6255.

Originally published on 2019-12-10.