



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55


Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jan-2020

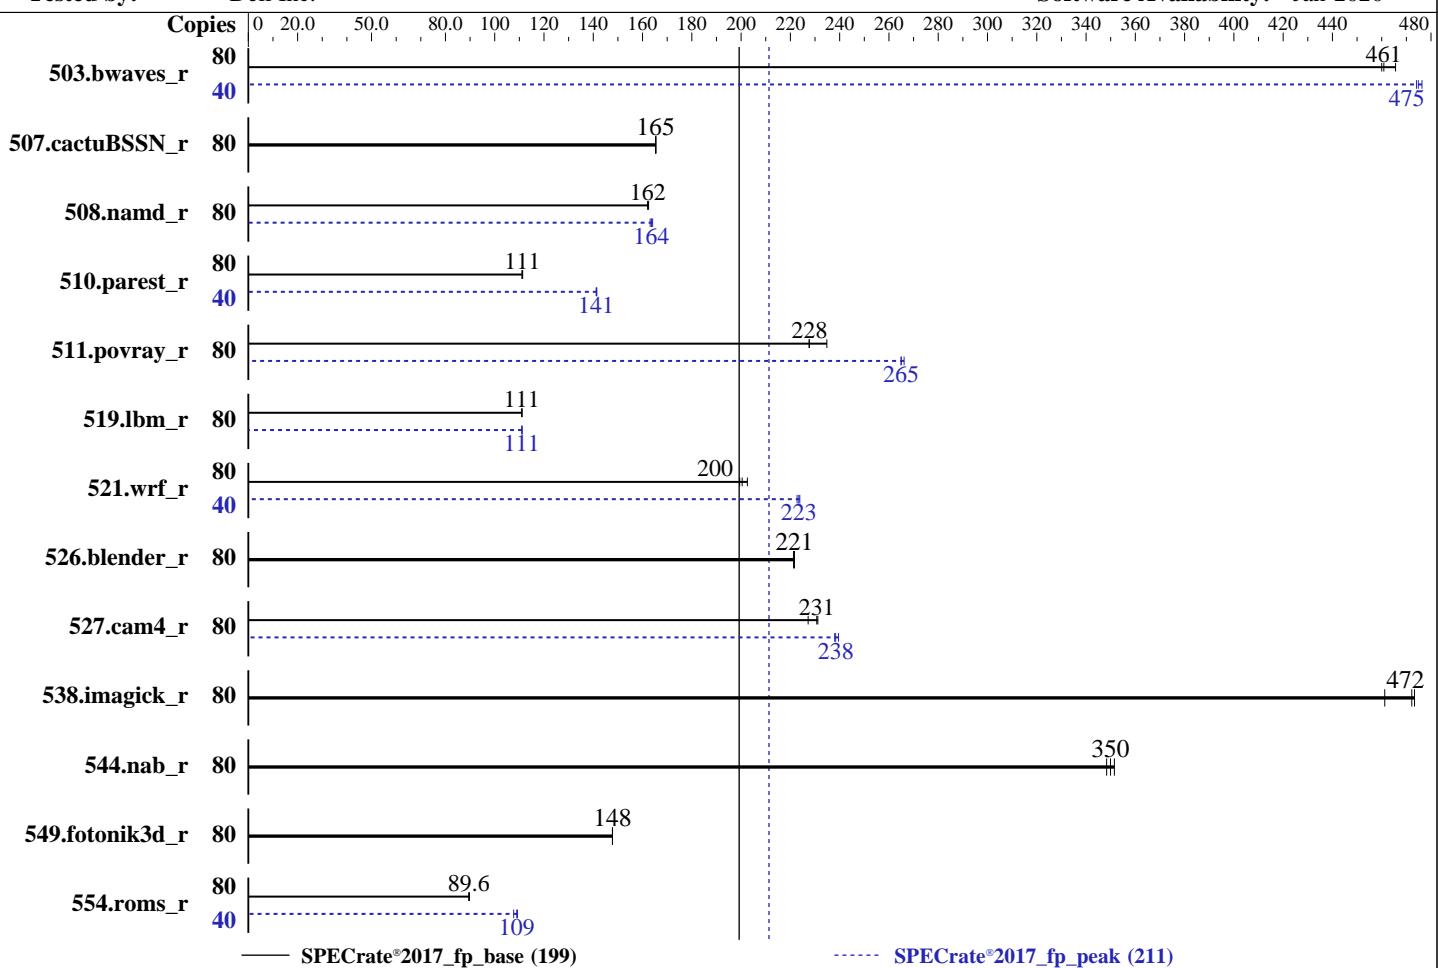

— SPECrate®2017\_fp\_base (199)

····· SPECrate®2017\_fp\_peak (211)

## Hardware

CPU Name: Intel Xeon Gold 5218R  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 40 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 27.5 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx8 PC4-2933V-R,  
 running at 2666)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

OS:  
 Compiler:  
 Parallel:  
 Firmware:  
 File System:  
 System State:  
 Base Pointers:  
 Peak Pointers:  
 Other:  
 Power Management:

CentOS Linux release 8.1.1911  
 kernel 4.18.0-147.el8.x86\_64  
 C/C++: Version 19.0.5.281 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.5.281 of Intel Fortran  
 Compiler for Linux  
 No  
 Version 2.7.3 released Mar-2020  
 ext4  
 Run level 3 (multi-user)  
 64-bit  
 64-bit  
 None  
 BIOS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2020  
Hardware Availability: Feb-2020  
Software Availability: Jan-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	80	1744	460	1723	466	<b>1741</b>	<b>461</b>	40	842	476	<b>845</b>	<b>475</b>	846	474
507.cactuBSSN_r	80	<b>613</b>	<b>165</b>	612	165	613	165	80	<b>613</b>	<b>165</b>	612	165	613	165
508.namd_r	80	468	162	<b>469</b>	<b>162</b>	469	162	80	<b>465</b>	<b>164</b>	466	163	463	164
510.parest_r	80	1879	111	<b>1881</b>	<b>111</b>	1885	111	40	<b>741</b>	<b>141</b>	740	141	741	141
511.povray_r	80	821	228	796	235	<b>820</b>	<b>228</b>	80	705	265	<b>705</b>	<b>265</b>	702	266
519.lbm_r	80	760	111	759	111	<b>760</b>	<b>111</b>	80	<b>759</b>	<b>111</b>	759	111	759	111
521.wrf_r	80	<b>894</b>	<b>200</b>	899	199	885	203	40	<b>401</b>	<b>223</b>	402	223	400	224
526.blender_r	80	551	221	<b>550</b>	<b>221</b>	550	222	80	<b>551</b>	<b>221</b>	<b>550</b>	<b>221</b>	550	222
527.cam4_r	80	<b>606</b>	<b>231</b>	616	227	605	231	80	<b>588</b>	<b>238</b>	584	240	<b>587</b>	<b>238</b>
538.imagick_r	80	420	473	<b>421</b>	<b>472</b>	431	461	80	420	473	<b>421</b>	<b>472</b>	431	461
544.nab_r	80	386	348	<b>385</b>	<b>350</b>	383	351	80	386	348	<b>385</b>	<b>350</b>	383	351
549.fotonik3d_r	80	<b>2109</b>	<b>148</b>	2109	148	2110	148	80	<b>2109</b>	<b>148</b>	2109	148	2110	148
554.roms_r	80	<b>1419</b>	<b>89.6</b>	1417	89.7	1420	89.5	40	<b>584</b>	<b>109</b>	582	109	590	108

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 211

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH = "/root/cpu2017/lib/intel64"  
MALLOC\_CONF = "retain:true"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2020  
Hardware Availability: Feb-2020  
Software Availability: Jan-2020

## General Notes (Continued)

is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

## Platform Notes

BIOS settings:

Sub NUMA Cluster enabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub set to standard

Logical Processor enabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

```
Sysinfo program /root/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Fri Apr 10 06:30:22 2020
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz
  2 "physical id"s (chips)
  80 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 20
siblings   : 40
physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2020  
Hardware Availability: Feb-2020  
Software Availability: Jan-2020

## Platform Notes (Continued)

Architecture: x86\_64  
CPU op-mode(s): 32-bit, 64-bit  
Byte Order: Little Endian  
CPU(s): 80  
On-line CPU(s) list: 0-79  
Thread(s) per core: 2  
Core(s) per socket: 20  
Socket(s): 2  
NUMA node(s): 4  
Vendor ID: GenuineIntel  
CPU family: 6  
Model: 85  
Model name: Intel(R) Xeon(R) Gold 5218R CPU @ 2.10GHz  
Stepping: 7  
CPU MHz: 3104.230  
CPU max MHz: 4000.0000  
CPU min MHz: 800.0000  
BogoMIPS: 4200.00  
Virtualization: VT-x  
L1d cache: 32K  
L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 28160K  
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76  
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77  
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78  
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtTopology nonstop\_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpq rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occu\_llc cqm\_mbm\_total cqm\_mbm\_local dtherm ida arat pln pts pku ospke avx512\_vnni md\_clear flush\_ll1d arch\_capabilities

/proc/cpuinfo cache data  
cache size : 28160 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)  
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2020  
Hardware Availability: Feb-2020  
Software Availability: Jan-2020

## Platform Notes (Continued)

```
node 0 size: 95305 MB
node 0 free: 82782 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77
node 1 size: 96738 MB
node 1 free: 74453 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78
node 2 size: 96763 MB
node 2 free: 88654 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79
node 3 size: 96763 MB
node 3 free: 88578 MB
node distances:
node    0    1    2    3
  0: 10 21 11 21
  1: 21 10 21 11
  2: 11 21 10 21
  3: 21 11 21 10

From /proc/meminfo
MemTotal:           394824712 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.1.1911 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.1 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="8 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8 (Core)"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.1.1911 (Core)
system-release: CentOS Linux release 8.1.1911 (Core)
system-release-cpe: cpe:/o:centos:centos:8

uname -a:
Linux localhost.localdomain 4.18.0-147.el8.x86_64 #1 SMP Wed Dec 4 21:51:45 UTC 2019
x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):      Not affected
Microarchitectural Data Sampling:        Not affected
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jan-2020

## Platform Notes (Continued)

CVE-2017-5754 (Meltdown): Not affected

CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled via prctl and seccomp

CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

run-level 3 Apr 9 17:41 last=5

SPEC is set to: /root/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	439G	50G	368G	12%	/

From /sys/devices/virtual/dmi/id  
BIOS: Dell Inc. 2.7.3 03/25/2020  
Vendor: Dell Inc.  
Product: PowerEdge C6420  
Product Family: PowerEdge  
Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

8x 00AD00B300AD HMA84GR7CJR4N-WM	32 GB	2 rank	2933
1x 00AD063200AD HMA84GR7CJR4N-WM	32 GB	2 rank	2933
3x 00AD069D00AD HMA84GR7CJR4N-WM	32 GB	2 rank	2933
4x Not Specified	Not Specified		

(End of data from sysinfo program)

## Compiler Version Notes

=====

C	519.lbm_r(base, peak) 538.imagick_r(base, peak)
	544.nab_r(base, peak)

=====

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815  
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.  
-----

=====

C++	508.namd_r(base, peak) 510.parest_r(base, peak)
-----	---

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jan-2020

## Compiler Version Notes (Continued)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C | 511.povray\_r(base, peak) 526.blender\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)  
| 554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

Fortran, C | 521.wrf\_r(base, peak) 527.cam4\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jan-2020

## Compiler Version Notes (Continued)

Version 19.0.5.281 Build 20190815

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using both C and C++:

icpc -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jan-2020

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64 -std=c11
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using both C and C++:

```
icpc -m64 icc -m64 -std=c11
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jan-2020

## Peak Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

```
icpc -m64icc -m64 -std=c11 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

```
508.namd_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
510.parest_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -auto  
-nostandard-realloc-lhs
```

549.fotonik3d\_r: basepeak = yes

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 199

PowerEdge C6420 (Intel Xeon Gold 5218R, 2.10 GHz)

SPECrate®2017\_fp\_peak = 211

CPU2017 License: 55

Test Date: Apr-2020

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2020

Tested by: Dell Inc.

Software Availability: Jan-2020

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C (continued):

```
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4 -auto -nostandard-realloc-lhs
```

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=4
```

```
526.blender_r: basepeak = yes
```

Benchmarks using Fortran, C, and C++:

```
507.cactuBSSN_r: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-revE9.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2020-04-10 06:30:22-0400.

Report generated on 2020-05-12 14:55:34 by CPU2017 PDF formatter v6255.

Originally published on 2020-05-12.