



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

CPU2017 License: 9006


Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

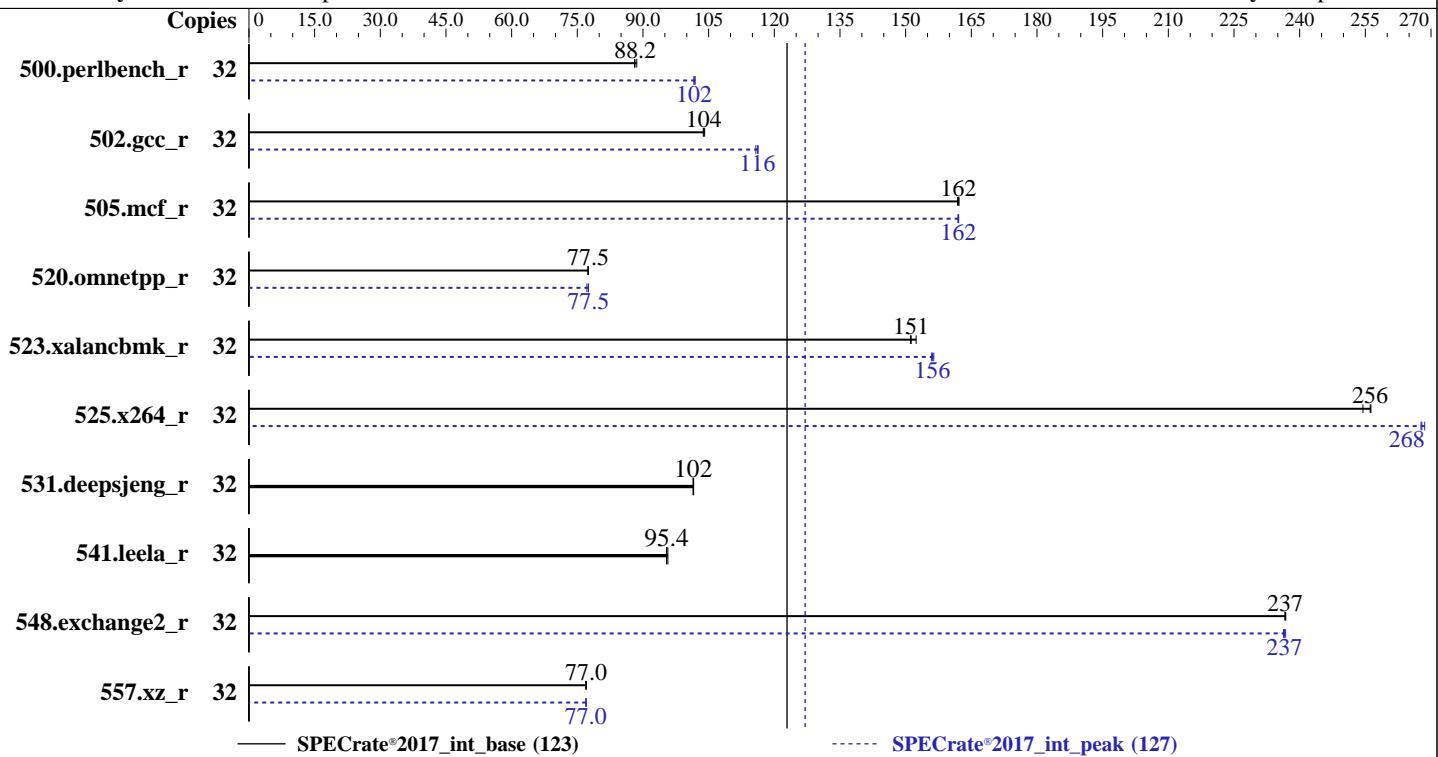

Hardware		Software	
CPU Name:	Intel Xeon Gold 6234	OS:	Red Hat Enterprise Linux Server release 7.7 (Maipo)
Max MHz:	4000	Compiler:	Kernel 3.10.0-1062.1.1.el7.x86_64
Nominal:	3300	Parallel:	C/C++: Version 19.0.4.227 of Intel C/C++ Compiler Build 20190416 for Linux;
Enabled:	16 cores, 2 chips, 2 threads/core	Firmware:	Fortran: Version 19.0.4.227 of Intel Fortran Compiler Build 20190416 for Linux
Orderable:	1,2 chips	File System:	No
Cache L1:	32 KB I + 32 KB D on chip per core	System State:	NEC BIOS Version U32 v2.22 11/13/2019 released Mar-2020
L2:	1 MB I+D on chip per core	Base Pointers:	ext4
L3:	24.75 MB I+D on chip per chip	Peak Pointers:	Run level 3 (multi-user)
Other:	None	Other:	64-bit
Memory:	384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)	Power Management:	32/64-bit
Storage:	1 x 1 TB SATA, 7200 RPM, RAID 0		jemalloc memory allocator V5.0.1
Other:	None		BIOS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

CPU2017 License: 9006

Test Date: Jun-2020

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2019

Tested by: NEC Corporation

Software Availability: Sep-2019

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	32	578	88.1	575	88.6	578	88.2	32	501	102	501	102	500	102
502.gcc_r	32	435	104	437	104	436	104	32	390	116	391	116	390	116
505.mcf_r	32	319	162	319	162	319	162	32	319	162	319	162	319	162
520.omnetpp_r	32	542	77.4	542	77.5	542	77.5	32	541	77.5	542	77.5	544	77.2
523.xalancbmk_r	32	223	151	224	151	222	152	32	217	156	216	156	216	156
525.x264_r	32	220	254	219	256	219	256	32	209	268	209	268	209	269
531.deepsjeng_r	32	361	101	361	102	361	102	32	361	101	361	102	361	102
541.leela_r	32	555	95.4	556	95.4	554	95.7	32	555	95.4	556	95.4	554	95.7
548.exchange2_r	32	354	237	354	237	354	237	32	354	237	354	237	355	236
557.xz_r	32	449	76.9	448	77.1	449	77.0	32	449	77.0	449	77.0	449	77.0

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-
  32"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM

memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3 > /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

CPU2017 License: 9006

Test Date: Jun-2020

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2019

Tested by: NEC Corporation

Software Availability: Sep-2019

General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS Settings:

Thermal Configuration: Maximum Cooling

Workload Profile: General Throughput Compute

Memory Patrol Scrubbing: Disabled

LLC Dead Line Allocation: Disabled

LLC Prefetch: Enabled

Enhanced Processor Performance: Enabled

Workload Profile: Custom

Advanced Memory Protection: Advanced ECC Support

Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on r120h1m Fri Jun 5 08:46:16 2020

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz

2 "physical id"s (chips)

32 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 8

siblings : 16

physical 0: cores 2 8 9 17 18 19 20 27

physical 1: cores 2 3 4 8 9 20 25 27

From lscpu:

Architecture: x86_64

CPU op-mode(s): 32-bit, 64-bit

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

CPU2017 License: 9006

Test Date: Jun-2020

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2019

Tested by: NEC Corporation

Software Availability: Sep-2019

Platform Notes (Continued)

Byte Order: Little Endian
CPU(s): 32
On-line CPU(s) list: 0-31
Thread(s) per core: 2
Core(s) per socket: 8
Socket(s): 2
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Gold 6234 CPU @ 3.30GHz
Stepping: 7
CPU MHz: 3300.000
BogoMIPS: 6600.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 25344K
NUMA node0 CPU(s): 0-3,16-19
NUMA node1 CPU(s): 4-7,20-23
NUMA node2 CPU(s): 8-11,24-27
NUMA node3 CPU(s): 12-15,28-31
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch epb cat_l3 cdp_l3 invpcid_single intel_ppin intel_pt ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavenc xgetbv1 cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear spec_ctrl intel_stibp flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 25344 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 16 17 18 19
node 0 size: 97960 MB
node 0 free: 95613 MB
node 1 cpus: 4 5 6 7 20 21 22 23
node 1 size: 98304 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

CPU2017 License: 9006

Test Date: Jun-2020

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2019

Tested by: NEC Corporation

Software Availability: Sep-2019

Platform Notes (Continued)

```
node 1 free: 96052 MB
node 2 cpus: 8 9 10 11 24 25 26 27
node 2 size: 98304 MB
node 2 free: 95965 MB
node 3 cpus: 12 13 14 15 28 29 30 31
node 3 size: 98303 MB
node 3 free: 96079 MB
node distances:
node   0   1   2   3
  0: 10  21  31  31
  1: 21  10  31  31
  2: 31  31  10  21
  3: 31  31  21  10

From /proc/meminfo
MemTotal:           395923592 kB
HugePages_Total:        0
Hugepagesize:         2048 kB

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.7 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VARIANT="Server"
VARIANT_ID="server"
VERSION_ID="7.7"
PRETTY_NAME="Red Hat Enterprise Linux Server 7.7 (Maipo)"
redhat-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release: Red Hat Enterprise Linux Server release 7.7 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.7:ga:server

uname -a:
Linux r120h1m 3.10.0-1062.1.1.el7.x86_64 #1 SMP Tue Aug 13 18:39:59 UTC 2019 x86_64
x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):          Not affected
Microarchitectural Data Sampling:            Not affected
CVE-2017-5754 (Meltdown):                  Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store Bypass disabled
                                                via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):        Mitigation: Load fences, usercopy/swaps
                                                barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):        Mitigation: Full retpoline, IBPB
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Platform Notes (Continued)

run-level 3 Jun 5 08:40

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	ext4	908G	152G	711G	18%	/

From /sys/devices/virtual/dmi/id

 BIOS: NEC U32 11/13/2019

 Vendor: NEC

 Product: Express5800/R120h-1M

 Serial: JPN0084094

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

 24x HPE P03050-091 16 GB 2 rank 2933

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECCrate®2017_int_base = 123

SPECCrate®2017_int_peak = 127

CPU2017 License: 9006

Test Date: Jun-2020

Test Sponsor: NEC Corporation

Hardware Availability: Dec-2019

Tested by: NEC Corporation

Software Availability: Sep-2019

Compiler Version Notes (Continued)

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

=====

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 523.xalancbmk_r(peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on IA-32, Version
19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base)
| 531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

Test Date: Jun-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Compiler Version Notes (Continued)

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64
-lqkmalloc

C++ benchmarks:

-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64 -std=c11
```

502.gcc_r: icc -m32 -std=c11 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

C++ benchmarks (except as noted below):

```
icpc -m64
```

523.xalancbmk_r: icpc -m32 -L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/ia32_lin

Fortran benchmarks:

```
ifort -m64
```

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -D_FILE_OFFSET_BITS=64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECrate®2017_int_base = 123

SPECrate®2017_int_peak = 127

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-fno-strict-overflow  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
502.gcc_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

```
505.mcf_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
525.x264_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

557.xz_r: Same as 505.mcf_r

C++ benchmarks:

```
520.omnetpp_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```

```
523.xalancbmk_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2) -ipo  
-xCORE-AVX512 -O3 -no-prec-div -qopt-mem-layout-trans=4  
-L/usr/local/jet5.0.1-32/lib -ljemalloc
```

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

```
-Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2019.4.227/linux/compiler/lib/intel64  
-lqkmalloc
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120h-1M (Intel Xeon Gold 6234)

SPECCrate®2017_int_base = 123

SPECCrate®2017_int_peak = 127

CPU2017 License: 9006

Test Sponsor: NEC Corporation

Tested by: NEC Corporation

Test Date: Jun-2020

Hardware Availability: Dec-2019

Software Availability: Sep-2019

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.Ou1-official-linux64.2019-07-09.html>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.Ou1-official-linux64.2019-07-09.xml>

<http://www.spec.org/cpu2017/flags/NEC-Platform-Settings-V1.2-R120h-RevE.xml>

SPEC CPU and SPECCrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2020-06-04 19:46:15-0400.

Report generated on 2020-06-23 18:03:50 by CPU2017 PDF formatter v6255.

Originally published on 2020-06-23.