



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Jan-2021

Hardware Availability: Nov-2020

Software Availability: Aug-2020

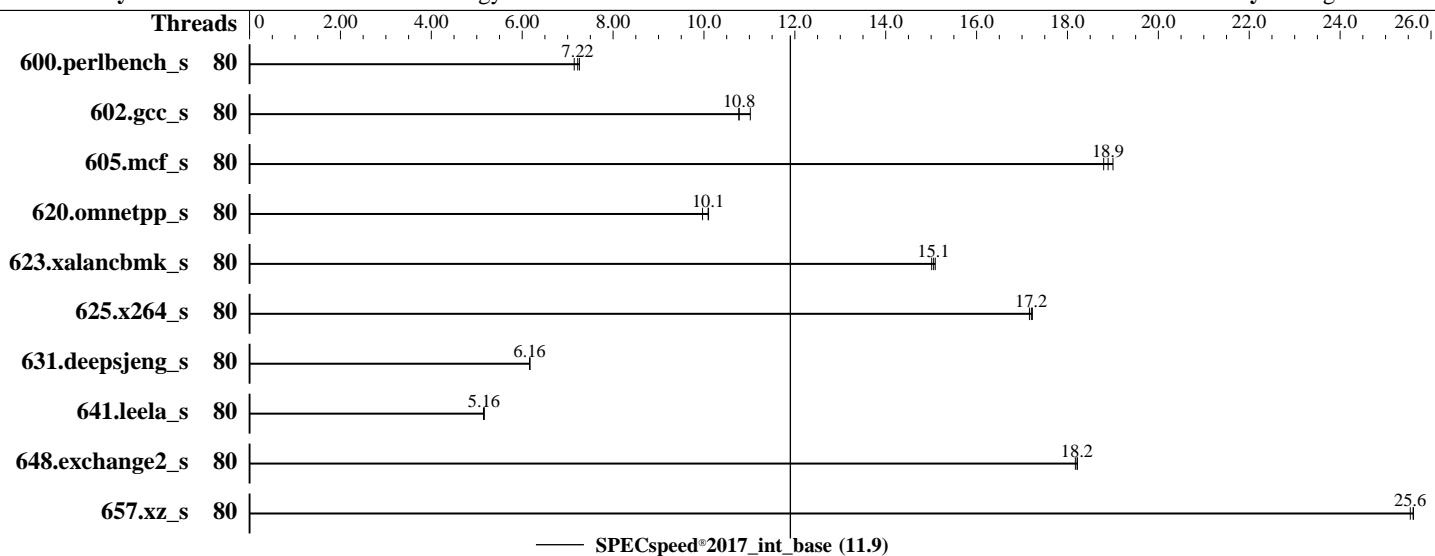

Hardware

CPU Name: Intel Xeon Gold 5320H
Max MHz: 4200
Nominal: 2400
Enabled: 80 cores, 4 chips
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 27.5 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 8.2 (Ootpa)
Compiler: Kernel 4.18.0-193.el8.x86_64
C/C++: Version 19.1.2.275 of Intel C/C++ Compiler for Linux;
Fortran: Version 19.1.2.275 of Intel Fortran Compiler for Linux
Parallel: Yes
Firmware: Lenovo BIOS Version M5E107I 1.01 released Nov-2020
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|------------|-------------|------------|-------------|-------------|-------------|---------|---------|-------|---------|-------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 80 | 248 | 7.14 | <u>246</u> | <u>7.22</u> | 245 | 7.26 | | | | | | | |
| 602.gcc_s | 80 | 370 | 10.8 | <u>370</u> | <u>10.8</u> | 361 | 11.0 | | | | | | | |
| 605.mcf_s | 80 | 248 | 19.0 | <u>250</u> | <u>18.9</u> | 251 | 18.8 | | | | | | | |
| 620.omnetpp_s | 80 | 164 | 9.97 | 161 | 10.1 | <u>162</u> | <u>10.1</u> | | | | | | | |
| 623.xalancbmk_s | 80 | 93.9 | 15.1 | 94.4 | 15.0 | <u>94.1</u> | <u>15.1</u> | | | | | | | |
| 625.x264_s | 80 | <u>103</u> | <u>17.2</u> | 103 | 17.2 | 102 | 17.2 | | | | | | | |
| 631.deepsjeng_s | 80 | 233 | 6.16 | 232 | 6.17 | <u>232</u> | <u>6.16</u> | | | | | | | |
| 641.leela_s | 80 | 331 | 5.15 | <u>331</u> | <u>5.16</u> | 330 | 5.16 | | | | | | | |
| 648.exchange2_s | 80 | <u>161</u> | <u>18.2</u> | 161 | 18.2 | 162 | 18.2 | | | | | | | |
| 657.xz_s | 80 | <u>241</u> | <u>25.6</u> | 242 | 25.5 | 241 | 25.6 | | | | | | | |

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

```
/home/cpu2017-1.1.0-ic19.1u2/lib/intel64:/home/cpu2017-1.1.0-ic19.1u2/j
e5.0.1-64"
```

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from [jemalloc.net](https://github.com/jemalloc/jemalloc/releases) or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
C-States set to Autonomous

Hyper-Threading set to Disabled

```
Sysinfo program /home/cpu2017-1.1.0-ic19.lu2/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edble6e46a485a0011
running on localhost.localdomain Sun Jan 3 13:03:10 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 5320H CPU @ 2.40GHz
        4 "physical id"s (chips)
        80 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
    cpu cores : 20
    siblings   : 20
    physical 0: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    physical 1: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    physical 2: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
    physical 3: cores 0 1 2 3 4 8 9 10 11 12 16 17 18 19 20 24 25 26 27 28
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:           Little Endian
CPU(s):               80
On-line CPU(s) list: 0-79
Thread(s) per core:  1
Core(s) per socket:  20
Socket(s):            4
NUMA node(s):         4
Vendor ID:            GenuineIntel
CPU family:           6
Model:                85
Model name:           Intel(R) Xeon(R) Gold 5320H CPU @ 2.40GHz
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Platform Notes (Continued)

Stepping: 11
CPU MHz: 3366.614
CPU max MHz: 4200.0000
CPU min MHz: 1000.0000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 28160K
NUMA node0 CPU(s): 0-19
NUMA node1 CPU(s): 20-39
NUMA node2 CPU(s): 40-59
NUMA node3 CPU(s): 60-79

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrandlahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13 invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpq rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 28160 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19
node 0 size: 386656 MB
node 0 free: 386439 MB
node 1 cpus: 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39
node 1 size: 387067 MB
node 1 free: 386857 MB
node 2 cpus: 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59
node 2 size: 387067 MB
node 2 free: 386874 MB
node 3 cpus: 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79
node 3 size: 387039 MB
node 3 free: 386260 MB
node distances:
node 0 1 2 3

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Platform Notes (Continued)

```
0: 10 20 20 20
1: 20 10 20 20
2: 20 20 10 20
3: 20 20 20 10
```

```
From /proc/meminfo
MemTotal:      1584978280 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.2 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.2"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

| | |
|---|--|
| itlb_multihit: | Not affected |
| CVE-2018-3620 (L1 Terminal Fault): | Not affected |
| Microarchitectural Data Sampling: | Not affected |
| CVE-2017-5754 (Meltdown): | Not affected |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp |
| CVE-2017-5753 (Spectre variant 1): | Mitigation: usercopy/swapgs barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2): | Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling |
| tsx_async_abort: | Not affected |

run-level 3 Jan 3 13:01

```
SPEC is set to: /home/cpu2017-1.1.0-ic19.1u2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda4        xfs   838G   35G  803G   5% /home
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Platform Notes (Continued)

From /sys/devices/virtual/dmi/id

BIOS: Lenovo M5E107I-1.01 11/02/2020
Vendor: Lenovo
Product: ThinkSystem SR850 V2
Product Family: ThinkSystem
Serial: 1234567890

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200

(End of data from sysinfo program)

Memory on this system run at 2666 MHz due to CPU limitation.

Compiler Version Notes

=====

C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
| 625.x264_s(base) 657.xz_s(base)

Intel(R) C Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
| 641.leela_s(base)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version
19.1.2.275 Build 20200604
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
64, Version 19.1.2.275 Build 20200623
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -fnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fopenmp -DSPEC_OPENMP
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-m64 -fnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.3.275/linux/compiler/lib/intel64_lin
-lqkmalloc

Fortran benchmarks:

-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -xCORE-AVX2
-O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR850 V2
(2.40 GHz, Intel Xeon Gold 5320H)

SPECspeed®2017_int_base = 11.9

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Jan-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Nov-2020

Tested by: Lenovo Global Technology

Software Availability: Aug-2020

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-mbranches-within-32B-boundaries

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Cooperlake-A.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2021-01-03 00:03:10-0500.

Report generated on 2021-01-19 16:58:27 by CPU2017 PDF formatter v6255.

Originally published on 2021-01-19.