



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

**SPECrate®2017\_int\_base = 379**

**SPECrate®2017\_int\_peak = 394**

CPU2017 License: 9061


**Test Date:** Feb-2021

**Test Sponsor:** ZTE Corporation

**Hardware Availability:** Dec-2020

**Tested by:** ZTE Corporation

**Software Availability:** Dec-2020

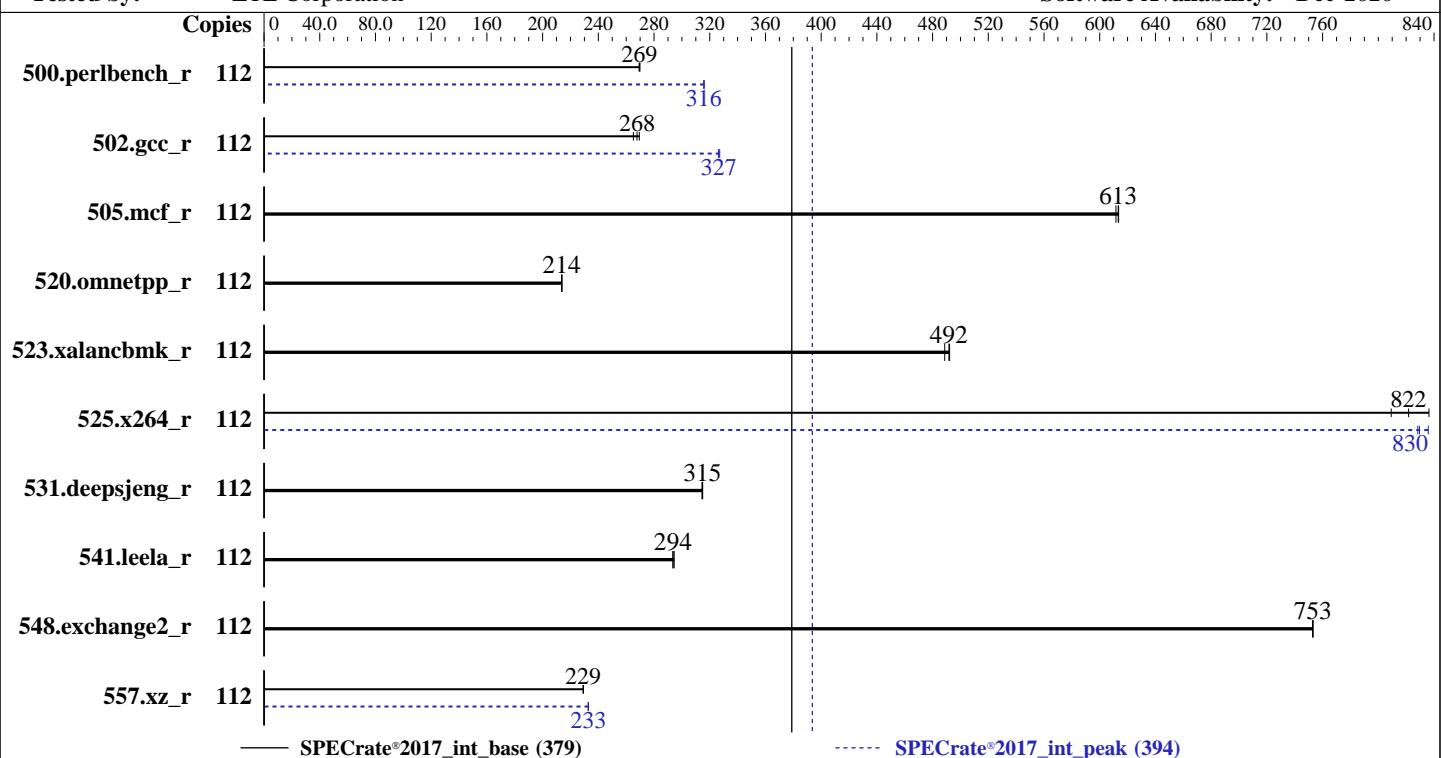

### Hardware

CPU Name: Intel Xeon Platinum 8280  
Max MHz: 4000  
Nominal: 2700  
Enabled: 56 cores, 2 chips, 2 threads/core  
Orderable: 1, 2 chip(s)  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 38.5 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (24 x 16 GB 2Rx8 PC4-2933Y-R)  
Storage: 2 x 1200 GB SAS HDD 10000 RPM, RAID1  
Other: None

### Software

OS: Red Hat Enterprise Linux release 8.2 (Ootpa)  
4.18.0-193.el8.x86\_64  
Compiler: C/C++: Version 19.1.1.217 of Intel C/C++  
Compiler Build 20200306 for Linux;  
Fortran: Version 19.1.1.217 of Intel Fortran  
Compiler Build 20200306 for Linux  
Parallel: No  
Firmware: Version 03.20.0200 released Dec-2020  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other: jemalloc: jemalloc memory allocator library  
V5.0.1  
Power Management: BIOS and OS set to prefer performance at the cost  
of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

**SPECrate®2017\_int\_base = 379**

**SPECrate®2017\_int\_peak = 394**

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	112	661	270	662	269	<b>662</b>	<b>269</b>	112	<b>565</b>	<b>316</b>	565	316	564	316		
502.gcc_r	112	589	269	<b>592</b>	<b>268</b>	598	265	112	486	326	485	327	<b>486</b>	<b>327</b>		
505.mcf_r	112	<b>295</b>	<b>613</b>	296	612	295	614	112	<b>295</b>	<b>613</b>	296	612	295	614		
520.omnetpp_r	112	687	214	688	214	<b>688</b>	<b>214</b>	112	687	214	688	214	<b>688</b>	<b>214</b>		
523.xalancbmk_r	112	240	492	242	489	<b>241</b>	<b>492</b>	112	240	492	242	489	<b>241</b>	<b>492</b>		
525.x264_r	112	234	836	242	809	<b>239</b>	<b>822</b>	112	<b>236</b>	<b>830</b>	235	836	237	828		
531.deepsjeng_r	112	408	314	<b>408</b>	<b>315</b>	408	315	112	408	314	<b>408</b>	<b>315</b>	408	315		
541.leela_r	112	632	294	630	294	<b>632</b>	<b>294</b>	112	632	294	630	294	<b>632</b>	<b>294</b>		
548.exchange2_r	112	390	753	<b>390</b>	<b>753</b>	390	753	112	390	753	<b>390</b>	<b>753</b>	390	753		
557.xz_r	112	527	229	528	229	<b>528</b>	<b>229</b>	112	<b>519</b>	<b>233</b>	520	233	519	233		

**SPECrate®2017\_int\_base = 379**

**SPECrate®2017\_int\_peak = 394**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux  
The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor.  
For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
OS set to performance mode via cpupower frequency-set -g performance

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/spec/lib/intel64:/home/spec/lib/ia32:/home/spec/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

The jemalloc library was configured and built at default for 32bit (i686) and 64bit (x86\_64) targets; built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5; sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Configuration:

VT-d = Disabled

Patrol Scrub = Disabled

ENERGY\_PERF\_BIAS\_CFG mode = performance

SNC = Enabled

IMC interleaving = 1-way

SR-IOV Support = Disabled

Sysinfo program /home/spec/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on localhost.localdomain Thu Feb 18 14:28:28 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
  2 "physical id"s (chips)
  112 "processors"
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Platform Notes (Continued)

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 28
siblings   : 56
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
              28 29 30
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
              28 29 30
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                112
On-line CPU(s) list:  0-111
Thread(s) per core:   2
Core(s) per socket:   28
Socket(s):             2
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               6
CPU MHz:               3300.090
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              5400.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              39424K
NUMA node0 CPU(s):    0-3,7-9,14-17,21-23,56-59,63-65,70-73,77-79
NUMA node1 CPU(s):    4-6,10-13,18-20,24-27,60-62,66-69,74-76,80-83
NUMA node2 CPU(s):    28-31,35-37,42-45,49-51,84-87,91-93,98-101,105-107
NUMA node3 CPU(s):    32-34,38-41,46-48,52-55,88-90,94-97,102-104,108-111
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                      pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                      lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
                      aperfmpfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
                      xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
                      avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cdp_13
                      invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority
                      ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt_a
                      avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
                      xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Platform Notes (Continued)

```
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 56 57 58 59 63 64 65 70 71 72 73 77 78 79

node 0 size: 95079 MB

node 0 free: 94813 MB

node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 60 61 62 66 67 68 69 74 75 76 80 81 82 83

node 1 size: 96761 MB

node 1 free: 95684 MB

node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 84 85 86 87 91 92 93 98 99 100 101 105 106 107

node 2 size: 96734 MB

node 2 free: 96527 MB

node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 88 89 90 94 95 96 97 102 103 104 108 109 110 111

node 3 size: 96728 MB

node 3 free: 96383 MB

node distances:

node 0 1 2 3

0: 10 11 21 21

1: 11 10 21 21

2: 21 21 10 11

3: 21 21 11 10

From /proc/meminfo

MemTotal: 394551536 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: latency-performance

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has
performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.2 (Ootpa)"

ID="rhel"

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Platform Notes (Continued)

```
ID_LIKE="fedora"
VERSION_ID="8.2"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.2 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.2 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.2:ga
```

```
uname -a:
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri Mar 27 14:35:58 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Mitigation: Split huge pages
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Feb 18 14:25

SPEC is set to: /home/spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	1.1T	13G	1.1T	2%	/home

From /sys/devices/virtual/dmi/id

Vendor:	ZTE
Product Family:	Server

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M393A2K43DB2-CVF 16 GB 2 rank 2933, configured at 2934

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Platform Notes (Continued)

BIOS:

BIOS Vendor: ZTE  
BIOS Version: 03.20.0200  
BIOS Date: 12/12/2020  
BIOS Revision: 3.20

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

-----  
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

-----  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(peak) 557.xz\_r(peak)

-----  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

-----  
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

| 525.x264\_r(base, peak) 557.xz\_r(base)

=====  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 502.gcc\_r(peak)

=====  
Intel(R) C Compiler for applications running on IA-32, Version 2021.1 NextGen  
Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base)

=====  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C | 500.perlbench\_r(peak) 557.xz\_r(peak)

=====  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

=====  
Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Compiler Version Notes (Continued)

```
=====
Fortran | 548.exchange2_r(base, peak)
=====
```

```
Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)
 64, Version 19.1.1.217 Build 20200306
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-xCORE-AVX512 -O3 -ffast-math -fsto -mfpmath=sse -funroll-loops
-fuse-ld=gold -qopt-mem-layout-trans=4
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Feb-2021

Hardware Availability: Dec-2020

Software Availability: Dec-2020

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries  
-Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fmodulo -mfpmath=sse  
-funroll-loops -fuse-ld=gold -qopt-mem-layout-trans=4  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs  
-xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries  
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Sponsor: ZTE Corporation

Tested by: ZTE Corporation

Test Date: Feb-2021

Hardware Availability: Dec-2020

Software Availability: Dec-2020

## Peak Portability Flags (Continued)

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -Wl,-z,muldefs -prof-gen(pass 1) -prof-use(pass 2)
-xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -fno-strict-overflow
-mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
502.gcc_r: -m32
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/ia32_lin
-std=gnu89
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qnextgen -fuse-ld=gold
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib
-ljemalloc
```

505.mcf\_r: basepeak = yes

```
525.x264_r: -m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -xCORE-AVX512 -flto -O3 -ffast-math
-fuse-ld=gold -qopt-mem-layout-trans=4 -fno-alias
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

```
557.xz_r: -Wl,-z,muldefs -xCORE-AVX512 -ipo -O3 -no-prec-div
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/IntelCompiler19/compilers_and_libraries_2020.1.217/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ZTE Corporation

ZTE R5300G4 Server System  
(2.70 GHz, Intel Xeon Platinum 8280)

SPECrate®2017\_int\_base = 379

SPECrate®2017\_int\_peak = 394

CPU2017 License: 9061

Test Date: Feb-2021

Test Sponsor: ZTE Corporation

Hardware Availability: Dec-2020

Tested by: ZTE Corporation

Software Availability: Dec-2020

## Peak Optimization Flags (Continued)

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.1.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.lul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/ZTE-Platform-Settings-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-18 14:28:27-0500.

Report generated on 2021-03-16 15:24:01 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.