



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Tyrone Systems

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2  
(2.40 GHz, Intel Xeon Gold 6240R)

SPECrate®2017\_fp\_base = 272

SPECrate®2017\_fp\_peak = 275

CPU2017 License: 006042


Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

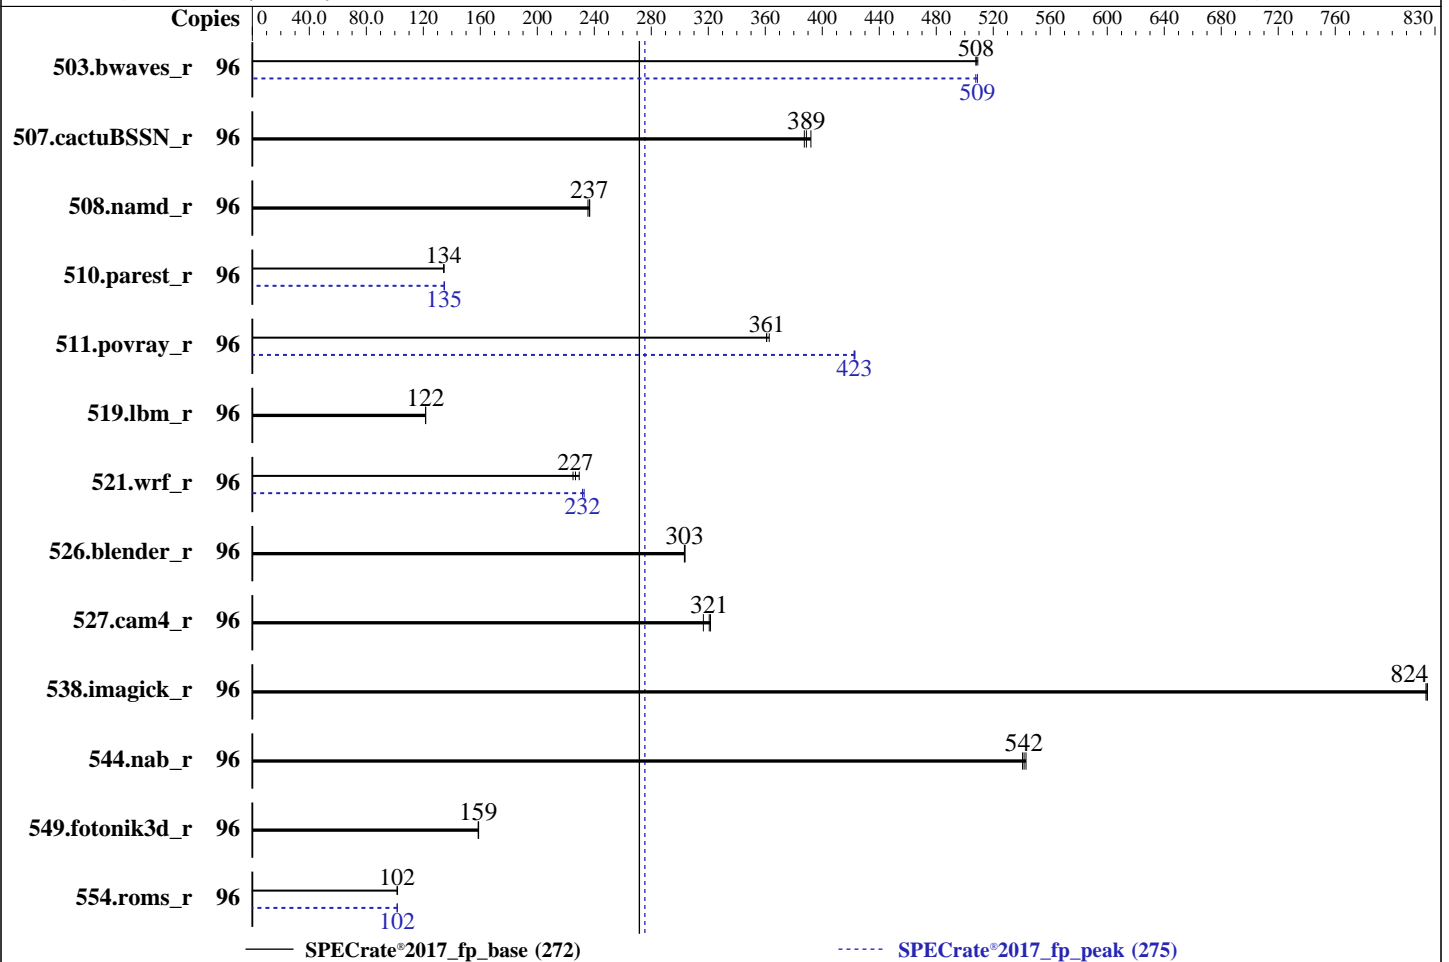

### Hardware

CPU Name: Intel Xeon Gold 6240R  
 Max MHz: 4000  
 Nominal: 2400  
 Enabled: 48 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 (chip)s  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 35.75 MB I+D on chip per chip  
 Other: None  
 Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
 Storage: 1 x 480 GB SATA SSD  
 Other: None

### Software

OS: CentOS Linux release 8.2.2004 (Core)  
 4.18.0-193.el8.x86\_64  
 Compiler: C/C++: Version 19.1.1.217 of Intel C/C++  
 Compiler Build 20200306 for Linux;  
 Fortran: Version 19.1.1.217 of Intel Fortran  
 Compiler Build 20200306 for Linux  
 Parallel: No  
 Firmware: Version 3.3 released Feb-2020  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS set to prefer performance at  
 the cost of additional power usage



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

Tyrone Camarero DS400TOG-424RT2  
(2.40 GHz, Intel Xeon Gold 6240R)

SPECrate®2017\_fp\_base = 272

SPECrate®2017\_fp\_peak = 275

CPU2017 License: 006042

Test Sponsor: Netweb Pte Ltd

Tested by: Tyrone Systems

Test Date: Feb-2021

Hardware Availability: Aug-2020

Software Availability: Jun-2020

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	1891	509	<b>1895</b>	<b>508</b>	1896	508	96	<b>1892</b>	<b>509</b>	1892	509	1896	508
507.cactuBSSN_r	96	310	392	<b>313</b>	<b>389</b>	314	387	96	310	392	<b>313</b>	<b>389</b>	314	387
508.namd_r	96	385	237	387	236	<b>386</b>	<b>237</b>	96	385	237	387	236	<b>386</b>	<b>237</b>
510.parest_r	96	1867	135	1870	134	<b>1869</b>	<b>134</b>	96	1865	135	<b>1865</b>	<b>135</b>	1862	135
511.povray_r	96	621	361	<b>621</b>	<b>361</b>	618	363	96	531	422	<b>530</b>	<b>423</b>	530	423
519.lbm_r	96	833	122	<b>832</b>	<b>122</b>	832	122	96	833	122	<b>832</b>	<b>122</b>	832	122
521.wrf_r	96	<b>948</b>	<b>227</b>	937	229	955	225	96	928	232	<b>928</b>	<b>232</b>	923	233
526.blender_r	96	482	303	481	304	<b>482</b>	<b>303</b>	96	482	303	481	304	<b>482</b>	<b>303</b>
527.cam4_r	96	530	317	522	322	<b>524</b>	<b>321</b>	96	530	317	522	322	<b>524</b>	<b>321</b>
538.imagick_r	96	290	824	290	825	<b>290</b>	<b>824</b>	96	290	824	290	825	<b>290</b>	<b>824</b>
544.nab_r	96	299	541	298	543	<b>298</b>	<b>542</b>	96	299	541	298	543	<b>298</b>	<b>542</b>
549.fotonik3d_r	96	<b>2359</b>	<b>159</b>	2356	159	2359	159	96	<b>2359</b>	<b>159</b>	2356	159	2359	159
554.roms_r	96	1501	102	<b>1499</b>	<b>102</b>	1497	102	96	<b>1499</b>	<b>102</b>	1502	102	1498	102

SPECrate®2017\_fp\_base = 272

SPECrate®2017\_fp\_peak = 275

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The inconsistent Compiler version information under Compiler Version section is due to a discrepancy in Intel Compiler.

The correct version of C/C++ compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

The correct version of Fortran compiler is: Version 19.1.1.217 Build 20200306 Compiler for Linux

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## General Notes

Binaries compiled on a system with 2x Intel Cascade Lake CPU 4214R + 384 GB RAM memory using Centos 8.2 x86\_64

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the Centos 8.2 x86\_64, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS Settings:

Power Technology = Custom

Power Performance Tuning = BIOS Controls EPB

ENERGY\_PERF\_BIAS\_CFG mode = Maximum Performance

SNC = Enable

Stale AtoS = Disable

IMC Interleaving = 1-way Interleave

Patrol Scrub = Disable

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c

running on localhost.localdomain Fri Feb 12 18:09:29 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6240R CPU @ 2.40GHz
```

```
2 "physical id"s (chips)
```

```
96 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 24
```

```
siblings : 48
```

```
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Platform Notes (Continued)

physical 1: cores 0 1 2 3 4 5 6 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:   0-95
Thread(s) per core:    2
Core(s) per socket:    24
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                85
Model name:            Intel(R) Xeon(R) Gold 6240R CPU @ 2.40GHz
Stepping:              7
CPU MHz:               3194.263
CPU max MHz:           4000.0000
CPU min MHz:           1000.0000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
NUMA node0 CPU(s):    0-3,7-9,13-15,19,20,48-51,55-57,61-63,67,68
NUMA node1 CPU(s):    4-6,10-12,16-18,21-23,52-54,58-60,64-66,69-71
NUMA node2 CPU(s):    24-27,31,32,36-38,42-44,72-75,79,80,84-86,90-92
NUMA node3 CPU(s):    28-30,33-35,39-41,45-47,76-78,81-83,87-89,93-95
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx fl6c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3
invpcid_single intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm
cqm mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld
arch_capabilities

```

```

/proc/cpuinfo cache data
cache size : 36608 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Platform Notes (Continued)

```

physical chip.
available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 7 8 9 13 14 15 19 20 48 49 50 51 55 56 57 61 62 63 67 68
node 0 size: 95352 MB
node 0 free: 83479 MB
node 1 cpus: 4 5 6 10 11 12 16 17 18 21 22 23 52 53 54 58 59 60 64 65 66 69 70 71
node 1 size: 96762 MB
node 1 free: 86545 MB
node 2 cpus: 24 25 26 27 31 32 36 37 38 42 43 44 72 73 74 75 79 80 84 85 86 90 91 92
node 2 size: 96762 MB
node 2 free: 86113 MB
node 3 cpus: 28 29 30 33 34 35 39 40 41 45 46 47 76 77 78 81 82 83 87 88 89 93 94 95
node 3 size: 96734 MB
node 3 free: 86725 MB
node distances:
node  0  1  2  3
  0: 10 11 21 21
  1: 11 10 21 21
  2: 21 21 10 11
  3: 21 21 11 10

```

```

From /proc/meminfo
MemTotal:      394866976 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

```

```

/sbin/tuned-adm active
  Current active profile: throughput-performance

```

```

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

```

```

From /etc/*release* /etc/*version*
centos-release: CentOS Linux release 8.2.2004 (Core)
centos-release-upstream: Derived from Red Hat Enterprise Linux 8.2 (Source)
os-release:
  NAME="CentOS Linux"
  VERSION="8 (Core)"
  ID="centos"
  ID_LIKE="rhel fedora"
  VERSION_ID="8"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="CentOS Linux 8 (Core)"
  ANSI_COLOR="0;31"
redhat-release: CentOS Linux release 8.2.2004 (Core)
system-release: CentOS Linux release 8.2.2004 (Core)
system-release-cpe: cpe:/o:centos:centos:8

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Platform Notes (Continued)

uname -a:

```
Linux localhost.localdomain 4.18.0-193.el8.x86_64 #1 SMP Fri May 8 10:59:10 UTC 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	KVM: Vulnerable
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	No status reported
CVE-2019-11135 (TSX Asynchronous Abort):	Mitigation: Clear CPU buffers; SMT vulnerable

run-level 3 Feb 12 10:22

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/cl-home	xfs	392G	143G	250G	37%	/home

From /sys/devices/virtual/dmi/id

Vendor:	Tyrone Systems
Product:	Tyrone Camarero DS400TOG-424RT2
Product Family:	SMC X11
Serial:	A309085X0907231

Additional information from dmidecode follows. **WARNING:** Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

12x NO DIMM NO DIMM
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934

BIOS:

BIOS Vendor:	American Megatrends Inc.
BIOS Version:	3.3
BIOS Date:	02/21/2020

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Platform Notes (Continued)

BIOS Revision: 5.14

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)  
=====

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)  
=====

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1  
NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

=====  
C++, C | 511.povray\_r(peak)  
=====

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Compiler Version Notes (Continued)

C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,

Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) C++ Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1

NextGen Build 20200304

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran | 503.bwaves\_r(base, peak) 549.fotonik3d\_r(base, peak)

| 554.roms\_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)

64, Version 19.1.1.217 Build 20200306

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**  
(Test Sponsor: Netweb Pte Ltd)  
**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**  
**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042  
**Test Sponsor:** Netweb Pte Ltd  
**Tested by:** Tyrone Systems

**Test Date:** Feb-2021  
**Hardware Availability:** Aug-2020  
**Software Availability:** Jun-2020

## Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Compiler for applications running on Intel(R) 64, Version 2021.1 NextGen Build 20200304  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
Fortran, C | 521.wrf\_r(peak)  
-----

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64, Version 19.1.1.217 Build 20200306  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:  
icc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

510.parest\_r: -DSPEC\_LP64

511.povray\_r: -DSPEC\_LP64

519.lbm\_r: -DSPEC\_LP64

521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian

526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char

527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

538.imagick\_r: -DSPEC\_LP64

544.nab\_r: -DSPEC\_LP64

549.fotonik3d\_r: -DSPEC\_LP64

554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -qnextgen -std=c11

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs

-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib

-ljemalloc

C++ benchmarks:

-m64 -qnextgen -Wl,-plugin-opt=-x86-branches-within-32B-boundaries

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

Benchmarks using both C and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib
-ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -qnextgen -std=c11
-Wl,-plugin-opt=-x86-branches-within-32B-boundaries -Wl,-z,muldefs
-fuse-ld=gold -xCORE-AVX512 -Ofast -ffast-math -flto -mfpmath=sse
-funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icc
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Peak Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

544.nab\_r: basepeak = yes

C++ benchmarks:

508.namd\_r: basepeak = yes

510.parest\_r: -m64 -qnextgen

-Wl,-plugin-opt=-x86-branches-within-32B-boundaries

-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -Ofast

-ffast-math -flto -mfpmath=sse -funroll-loops

-qopt-mem-layout-trans=4 -L/usr/local/je5.0.1-64/lib

-ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

## Peak Optimization Flags (Continued)

Fortran benchmarks:

```
503.bwaves_r: -m64 -Wl,-plugin-opt=-x86-branches-within-32B-boundaries
-Wl,-z,muldefs -fuse-ld=gold -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/je5.0.1-64/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic19.1ul-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Tyrone-Platform-Settings-V1.2-CLX-revB.xml>



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**Tyrone Systems**

(Test Sponsor: Netweb Pte Ltd)

**Tyrone Camarero DS400TOG-424RT2**  
(2.40 GHz, Intel Xeon Gold 6240R)

**SPECrate®2017\_fp\_base = 272**

**SPECrate®2017\_fp\_peak = 275**

**CPU2017 License:** 006042

**Test Sponsor:** Netweb Pte Ltd

**Tested by:** Tyrone Systems

**Test Date:** Feb-2021

**Hardware Availability:** Aug-2020

**Software Availability:** Jun-2020

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-02-12 07:39:29-0500.

Report generated on 2021-03-16 15:28:07 by CPU2017 PDF formatter v6255.

Originally published on 2021-03-16.