



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

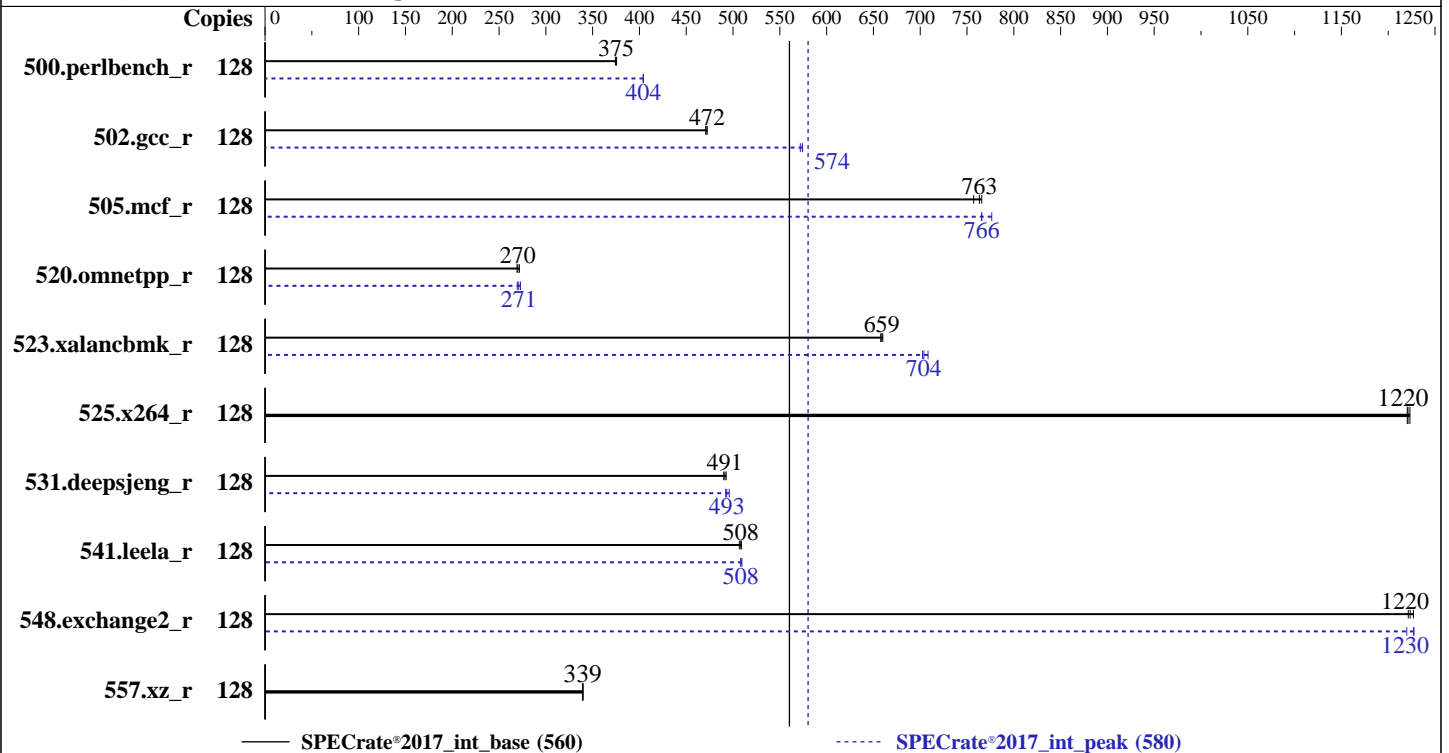

### Hardware

CPU Name: AMD EPYC 7543  
 Max MHz: 3700  
 Nominal: 2800  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 512 KB I+D on chip per core  
 L3: 256 MB I+D on chip per chip, 32 MB shared / 4 cores  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC4-3200AA-R)  
 Storage: 1 x 240 GB SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 SP2 (x86\_64)  
 Kernel 5.3.18-22-default  
 Compiler: C/C++/Fortran: Version 3.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 0404 released Feb-2021  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc: jemalloc memory allocator library v5.1.0  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	128	<b>543</b>	<b>375</b>	544	374	543	376	128	504	404	<b>504</b>	<b>404</b>	504	404
502.gcc_r	128	385	471	<b>384</b>	<b>472</b>	384	472	128	316	574	317	572	<b>316</b>	<b>574</b>
505.mcf_r	128	273	757	270	766	<b>271</b>	<b>763</b>	128	<b>270</b>	<b>766</b>	266	776	270	766
520.omnetpp_r	128	<b>622</b>	<b>270</b>	624	269	618	272	128	615	273	623	269	<b>620</b>	<b>271</b>
523.xalancbmk_r	128	205	660	205	658	<b>205</b>	<b>659</b>	128	191	708	192	703	<b>192</b>	<b>704</b>
525.x264_r	128	183	1220	<b>184</b>	<b>1220</b>	184	1220	128	183	1220	<b>184</b>	<b>1220</b>	184	1220
531.deepsjeng_r	128	299	490	<b>299</b>	<b>491</b>	298	493	128	<b>297</b>	<b>493</b>	296	496	298	492
541.leela_r	128	416	509	418	507	<b>417</b>	<b>508</b>	128	<b>417</b>	<b>508</b>	417	508	416	510
548.exchange2_r	128	275	1220	273	1230	<b>274</b>	<b>1220</b>	128	275	1220	<b>273</b>	<b>1230</b>	273	1230
557.xz_r	128	407	340	408	339	<b>407</b>	<b>339</b>	128	407	340	408	339	<b>407</b>	<b>339</b>

SPECrate®2017\_int\_base = **560**

SPECrate®2017\_int\_peak = **580**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit
OS set to performance mode via cpupower frequency-set -g performance
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
'echo 8 > /proc/sys/vm/dirty_ratio' run as root to limit dirty cache to 8% of
memory.
'echo 1 > /proc/sys/vm/swappiness' run as root to limit swap usage to minimum
necessary.
'echo 1 > /proc/sys/vm/zone_reclaim_mode' run as root to free node-local memory
and avoid remote memory usage.
'sync; echo 3 > /proc/sys/vm/drop_caches' run as root to reset filesystem caches.
'sysctl -w kernel.randomize_va_space=0' run as root to disable address space layout
randomization (ASLR) to reduce run-to-run variability.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** Mar-2021

## Operating System Notes (Continued)

'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root for peak  
integer runs and all FP runs to enable Transparent Hugepages (THP).  
'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled' run as root for base  
integer runs to enable THP only on request.

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/spec2017A1/amd\_rate\_aocc300\_milan\_A\_lib/64;/spec2017A1/amd\_rate\_aocc300\_milan\_A\_lib/32:"  
MALLOC\_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalanbmk\_r peak run:  
MALLOC\_CONF = "thp:never"

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using OpenSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)  
jemalloc 5.1.0 is available here:  
<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

BIOS Configuration:  
DLWM Support = Disabled  
SVM Mode = Disabled  
NUMA nodes per socket = NPS4  
APBDIS = 1  
Fix SOC P-state = P0  
Engine Boost = Enabled  
ACPI SRAT L3 Cache as NUMA Domain = Enabled

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

sysinfo program /spec2017A1/bin/sysinfo  
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
running on localhost Mon Apr 19 15:29:05 2021

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : AMD EPYC 7543 32-Core Processor
 2 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 32
siblings : 64
physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
25 26 27 28 29 30 31
```

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
Address sizes: 48 bits physical, 48 bits virtual
CPU(s): 128
On-line CPU(s) list: 0-127
Thread(s) per core: 2
Core(s) per socket: 32
Socket(s): 2
NUMA node(s): 16
Vendor ID: AuthenticAMD
CPU family: 25
Model: 1
Model name: AMD EPYC 7543 32-Core Processor
Stepping: 1
CPU MHz: 2493.660
CPU max MHz: 2800.0000
CPU min MHz: 1500.0000
BogoMIPS: 5589.37
Virtualization: AMD-V
L1d cache: 32K
L1i cache: 32K
L2 cache: 512K
L3 cache: 32768K
NUMA node0 CPU(s): 0-3,64-67
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```

NUMA node1 CPU(s): 4-7,68-71
NUMA node2 CPU(s): 8-11,72-75
NUMA node3 CPU(s): 12-15,76-79
NUMA node4 CPU(s): 16-19,80-83
NUMA node5 CPU(s): 20-23,84-87
NUMA node6 CPU(s): 24-27,88-91
NUMA node7 CPU(s): 28-31,92-95
NUMA node8 CPU(s): 32-35,96-99
NUMA node9 CPU(s): 36-39,100-103
NUMA node10 CPU(s): 40-43,104-107
NUMA node11 CPU(s): 44-47,108-111
NUMA node12 CPU(s): 48-51,112-115
NUMA node13 CPU(s): 52-55,116-119
NUMA node14 CPU(s): 56-59,120-123
NUMA node15 CPU(s): 60-63,124-127

```

```

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmperf pni pclmulqdq
monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx fl6c rdrand
lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw
ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb
cat_l3 cdp_l3 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase
bmi1 avx2 smep bmi2 erms invpcid cqm rdt_a rdseed adx smap clflushopt clwb sha_ni
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local
clzero irperf xsaveerptr wbnoinvd arat npt lbrv svm_lock nrip_save tsc_scale
vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif
umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

```

```

/proc/cpuinfo cache data
cache size : 512 KB

```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```

available: 16 nodes (0-15)
node 0 cpus: 0 1 2 3 64 65 66 67
node 0 size: 64272 MB
node 0 free: 64126 MB
node 1 cpus: 4 5 6 7 68 69 70 71
node 1 size: 64507 MB
node 1 free: 64372 MB
node 2 cpus: 8 9 10 11 72 73 74 75
node 2 size: 64509 MB
node 2 free: 64408 MB
node 3 cpus: 12 13 14 15 76 77 78 79
node 3 size: 64507 MB
node 3 free: 64410 MB
node 4 cpus: 16 17 18 19 80 81 82 83

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

```

node 4 size: 64509 MB
node 4 free: 64309 MB
node 5 cpus: 20 21 22 23 84 85 86 87
node 5 size: 64507 MB
node 5 free: 64259 MB
node 6 cpus: 24 25 26 27 88 89 90 91
node 6 size: 64509 MB
node 6 free: 64404 MB
node 7 cpus: 28 29 30 31 92 93 94 95
node 7 size: 64495 MB
node 7 free: 64395 MB
node 8 cpus: 32 33 34 35 96 97 98 99
node 8 size: 64509 MB
node 8 free: 64417 MB
node 9 cpus: 36 37 38 39 100 101 102 103
node 9 size: 64507 MB
node 9 free: 64434 MB
node 10 cpus: 40 41 42 43 104 105 106 107
node 10 size: 64509 MB
node 10 free: 64412 MB
node 11 cpus: 44 45 46 47 108 109 110 111
node 11 size: 64507 MB
node 11 free: 64442 MB
node 12 cpus: 48 49 50 51 112 113 114 115
node 12 size: 64509 MB
node 12 free: 64439 MB
node 13 cpus: 52 53 54 55 116 117 118 119
node 13 size: 64507 MB
node 13 free: 64441 MB
node 14 cpus: 56 57 58 59 120 121 122 123
node 14 size: 64509 MB
node 14 free: 64448 MB
node 15 cpus: 60 61 62 63 124 125 126 127
node 15 size: 64507 MB
node 15 free: 64454 MB
node distances:
node  0  1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
0:  10 11 12 12 12 12 12 12 32 32 32 32 32 32 32 32
1:  11 10 12 12 12 12 12 12 32 32 32 32 32 32 32 32
2:  12 12 10 11 12 12 12 12 32 32 32 32 32 32 32 32
3:  12 12 11 10 12 12 12 12 32 32 32 32 32 32 32 32
4:  12 12 12 12 10 11 12 12 32 32 32 32 32 32 32 32
5:  12 12 12 12 11 10 12 12 32 32 32 32 32 32 32 32
6:  12 12 12 12 12 10 11 12 32 32 32 32 32 32 32 32
7:  12 12 12 12 12 11 10 12 32 32 32 32 32 32 32 32
8:  32 32 32 32 32 32 32 32 10 11 12 12 12 12 12 12
9:  32 32 32 32 32 32 32 32 11 10 12 12 12 12 12 12

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Apr-2021

Hardware Availability: Mar-2021

Software Availability: Mar-2021

### Platform Notes (Continued)

10:	32	32	32	32	32	32	32	32	32	12	12	10	11	12	12	12	12
11:	32	32	32	32	32	32	32	32	32	12	12	11	10	12	12	12	12
12:	32	32	32	32	32	32	32	32	32	12	12	12	12	10	11	12	12
13:	32	32	32	32	32	32	32	32	32	12	12	12	12	11	10	12	12
14:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	12	10	11
15:	32	32	32	32	32	32	32	32	32	12	12	12	12	12	12	11	10

From /proc/meminfo

```
MemTotal:      1056657348 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

```
os-release:
NAME="SLES"
VERSION="15-SP2"
VERSION_ID="15.2"
PRETTY_NAME="SUSE Linux Enterprise Server 15 SP2"
ID="sles"
ID_LIKE="suse"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:15:sp2"
```

uname -a:

```
Linux localhost 5.3.18-22-default #1 SMP Wed Jun 3 12:16:43 UTC 2020 (720aeba) x86_64
x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retpoline, IBPB: conditional, IBRS_FW, STIBP: always-on, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Platform Notes (Continued)

run-level 3 Apr 19 15:27

SPEC is set to: /spec2017A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda4	xfst	199G	22G	178G	11%	/

From /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
 Product: RS720A-E11-RS12E  
 Product Family: Server  
 Serial: 123456789012

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M393A8G40AB2-CWE 64 GB 2 rank 3200  
 16x Unknown Unknown

BIOS:

BIOS Vendor: American Megatrends Inc.  
 BIOS Version: 0404  
 BIOS Date: 02/02/2021  
 BIOS Revision: 4.4

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C      | 502.gcc_r(peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
LLVM Mirror.Version.12.0.0)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----
```

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak)
      | 525.x264_r(base, peak) 557.xz_r(base, peak)
-----
```

```
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
```

(Continued on next page)





# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**  
ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560  
SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021  
**Hardware Availability:** Mar-2021  
**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 502.gcc\_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak)  
| 525.x264\_r(base, peak) 557.xz\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 523.xalanbmk\_r(peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalanbmk\_r(base)  
| 531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Compiler Version Notes (Continued)

=====  
C++ | 523.xalancbmk\_r(peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base)  
531.deepsjeng\_r(base, peak) 541.leela\_r(base, peak)

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

=====  
Fortran | 548.exchange2\_r(base, peak)  
-----

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on  
LLVM Mirror.Version.12.0.0)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin  
-----

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Base Portability Flags

```

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

```

## Base Optimization Flags

### C benchmarks:

```

-m64 -Wl,-allow-multiple-definition -Wl,-mllvm -Wl,-enable-licm-vrp
-flto -Wl,-mllvm -Wl,-region-vectorize
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=5
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000
-freemap-arrays -mllvm -function-specialize -flv-function-specialization
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs
-lamdlibm -ljemalloc -lflang -lflangrti

```

### C++ benchmarks:

```

-m64 -std=c++98 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -enable-partial-unswitch
-mllvm -unroll-threshold=100 -finline-aggressive
-flv-function-specialization -mllvm -loop-unswitch-threshold=200000
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch
-mllvm -extra-vectorizer-passes -mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true -mllvm -convert-pow-exp-to-int=false
-z muldefs -mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm
-ljemalloc -lflang -lflangrti

```

### Fortran benchmarks:

```

-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-flto -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math  
-march=znver3 -fveclib=AMDLIBM -z muldefs -mllvm -unroll-aggressive  
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

## Peak Compiler Invocation

C benchmarks:

```
clang
```

C++ benchmarks:

```
clang++
```

Fortran benchmarks:

```
flang
```

## Peak Portability Flags

```
500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-fprofile-instr-generate(pass 1)
-fprofile-instr-use(pass 2) -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=false
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

```
502.gcc_r: -m32 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize -Ofast -march=znver3
-fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -fgnu89-inline
-ljemalloc
```

```
505.mcf_r: -m64 -Wl,-allow-multiple-definition
-Wl,-mllvm -Wl,-enable-licm-vrp -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -fstruct-layout=7
-mllvm -unroll-threshold=50 -fremap-arrays
-flv-function-specialization -mllvm -inline-threshold=1000
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true
-mllvm -function-specialize -mllvm -enable-licm-vrp
-mllvm -reduce-array-computations=3 -lamdlibm -ljemalloc
```

525.x264\_r: basepeak = yes

557.xz\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Peak Optimization Flags (Continued)

520.omnetpp\_r: -m64 -std=c++98

```
-Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-lamdlibm -ljemalloc
```

523.xalancbmk\_r: -m32 -Wl,-mllvm -Wl,-do-block-reorder=aggressive -flto

```
-Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast
-march=znver3 -fveclib=AMDLIBM -finline-aggressive
-mllvm -unroll-threshold=100 -flv-function-specialization
-mllvm -enable-licm-vrp -mllvm -reroll-loops
-mllvm -aggressive-loop-unswitch
-mllvm -reduce-array-computations=3
-mllvm -global-vectorize-slp=true
-mllvm -do-block-reorder=aggressive
-fvirtual-function-elimination -fvisibility=hidden
-ljemalloc
```

531.deepsjeng\_r: Same as 520.omnetpp\_r

541.leela\_r: Same as 520.omnetpp\_r

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-inline-recursion=4
-Wl,-mllvm -Wl,-lsr-in-nested-loop -Wl,-mllvm -Wl,-enable-iv-split
-flto -Wl,-mllvm -Wl,-function-specialize
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -ffast-math
-march=znver3 -fveclib=AMDLIBM -mllvm -unroll-aggressive
-mllvm -unroll-threshold=500 -lamdlibm -ljemalloc -lflang -lflangrti
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E11(KMPP-D32) Server System  
2.80 GHz, AMD EPYC 7543

SPECrate®2017\_int\_base = 560

SPECrate®2017\_int\_peak = 580

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Apr-2021

**Hardware Availability:** Mar-2021

**Software Availability:** Mar-2021

## Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc\_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32

C++ benchmarks (except as noted below):

-Wno-unused-command-line-argument

523.xalancbmk\_r: -L/usr/lib -Wno-unused-command-line-argument

-L/sppo/bin/cpu2017v115aocc3/amd\_rate\_aocc300\_milan\_A\_lib/32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.2.html>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-Milan-V1.2.xml>

<http://www.spec.org/cpu2017/flags/aocc300-flags-A1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-19 03:29:05-0400.

Report generated on 2021-05-12 13:40:29 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-11.