



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Dell Inc.

### SPECrate®2017\_fp\_base = 363

### PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

### SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

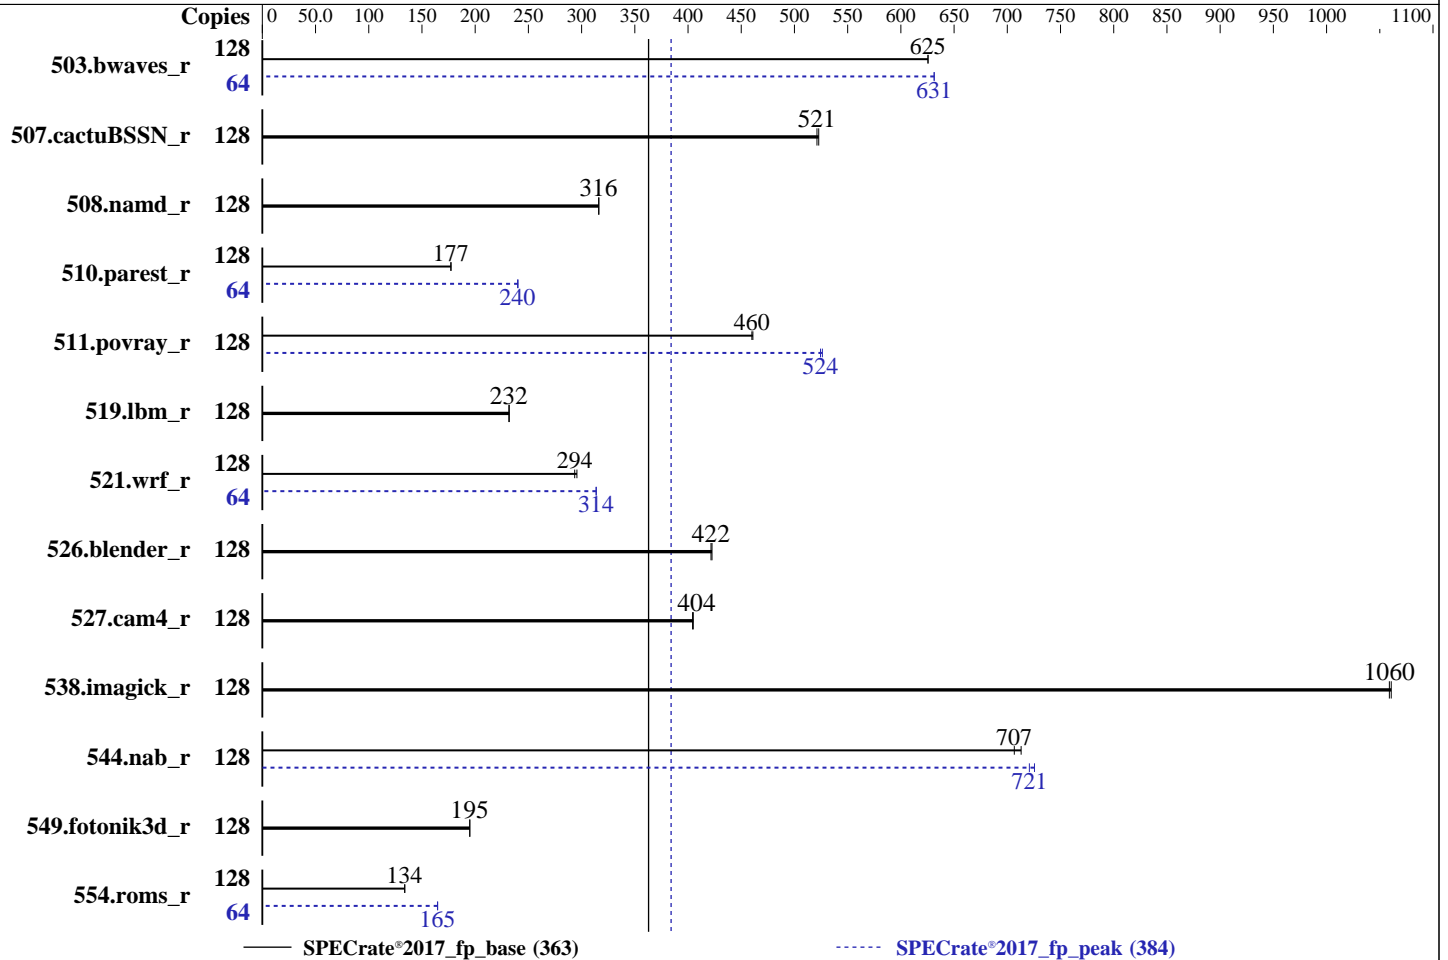

### Hardware

CPU Name: Intel Xeon Gold 6338N  
 Max MHz: 3500  
 Nominal: 2200  
 Enabled: 64 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 48 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx8 PC4-3200AA-R, running at 2666)  
 Storage: 225 GB on tmpfs  
 Other: None

### Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)  
 4.18.0-240.15.1.el8\_3.x86\_64  
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;  
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;  
 C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux  
 Parallel: No  
 Firmware: Version 1.1.2 released Apr-2021  
 File System: tmpfs  
 System State: Run level 5 (graphical multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 jemalloc memory allocator V5.0.1  
 (Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55  
Test Sponsor: Dell Inc.  
Tested by: Dell Inc.

Test Date: Apr-2021  
Hardware Availability: May-2021  
Software Availability: Feb-2021

### Software (Continued)

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

## Results Table

| Benchmark       | Base   |                    |                    |                    |                   |         | Peak  |        |                    |                    |                    |                   |         |       |
|-----------------|--------|--------------------|--------------------|--------------------|-------------------|---------|-------|--------|--------------------|--------------------|--------------------|-------------------|---------|-------|
|                 | Copies | Seconds            | Ratio              | Seconds            | Ratio             | Seconds | Ratio | Copies | Seconds            | Ratio              | Seconds            | Ratio             | Seconds | Ratio |
| 503.bwaves_r    | 128    | <b><u>2052</u></b> | <b><u>625</u></b>  | 2052               | 626               |         |       | 64     | 1017               | 631                | <b><u>1017</u></b> | <b><u>631</u></b> |         |       |
| 507.cactuBSSN_r | 128    | 310                | 523                | <b><u>311</u></b>  | <b><u>521</u></b> |         |       | 128    | 310                | 523                | <b><u>311</u></b>  | <b><u>521</u></b> |         |       |
| 508.namd_r      | 128    | 384                | 316                | <b><u>385</u></b>  | <b><u>316</u></b> |         |       | 128    | 384                | 316                | <b><u>385</u></b>  | <b><u>316</u></b> |         |       |
| 510.parest_r    | 128    | <b><u>1891</u></b> | <b><u>177</u></b>  | 1888               | 177               |         |       | 64     | 697                | 240                | <b><u>698</u></b>  | <b><u>240</u></b> |         |       |
| 511.povray_r    | 128    | 648                | 461                | <b><u>650</u></b>  | <b><u>460</u></b> |         |       | 128    | <b><u>570</u></b>  | <b><u>524</u></b>  | 568                | 526               |         |       |
| 519.lbm_r       | 128    | <b><u>582</u></b>  | <b><u>232</u></b>  | 581                | 232               |         |       | 128    | <b><u>582</u></b>  | <b><u>232</u></b>  | 581                | 232               |         |       |
| 521.wrf_r       | 128    | <b><u>977</u></b>  | <b><u>294</u></b>  | 970                | 296               |         |       | 64     | 457                | 314                | <b><u>457</u></b>  | <b><u>314</u></b> |         |       |
| 526.blender_r   | 128    | <b><u>462</u></b>  | <b><u>422</u></b>  | 461                | 423               |         |       | 128    | <b><u>462</u></b>  | <b><u>422</u></b>  | 461                | 423               |         |       |
| 527.cam4_r      | 128    | 553                | 405                | <b><u>554</u></b>  | <b><u>404</u></b> |         |       | 128    | 553                | 405                | <b><u>554</u></b>  | <b><u>404</u></b> |         |       |
| 538.imagick_r   | 128    | <b><u>301</u></b>  | <b><u>1060</u></b> | 300                | 1060              |         |       | 128    | <b><u>301</u></b>  | <b><u>1060</u></b> | 300                | 1060              |         |       |
| 544.nab_r       | 128    | 302                | 713                | <b><u>305</u></b>  | <b><u>707</u></b> |         |       | 128    | <b><u>299</u></b>  | <b><u>721</u></b>  | 297                | 726               |         |       |
| 549.fotonik3d_r | 128    | <b><u>2559</u></b> | <b><u>195</u></b>  | 2558               | 195               |         |       | 128    | <b><u>2559</u></b> | <b><u>195</u></b>  | 2558               | 195               |         |       |
| 554.roms_r      | 128    | 1519               | 134                | <b><u>1521</u></b> | <b><u>134</u></b> |         |       | 64     | <b><u>618</u></b>  | <b><u>165</u></b>  | 617                | 165               |         |       |

SPECrate®2017\_fp\_base = **363**

SPECrate®2017\_fp\_peak = **384**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
LD\_LIBRARY\_PATH =  
"/mnt/ramdisk/cpu2017-1.1.5-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.5-ic2021.1/je5.0.1-64"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM  
 memory using Red Hat Enterprise Linux 8.1  
 Transparent Huge Pages enabled by default  
 Prior to runcpu invocation  
 Filesystem page cache synced and cleared with:  
`sync; echo 3> /proc/sys/vm/drop_caches`  
 runcpu command invoked through numactl i.e.:  
`numactl --interleave=all runcpu <etc>`  
 jemalloc, a general purpose malloc implementation  
 built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.  
 Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS Settings:

Sub NUMA Cluster : 2-Way Clustering  
 Virtualization Technology : Disabled

System Profile : Custom  
 CPU Power Management : Maximum Performance  
 C1E : Disabled

C States : Autonomous  
 Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance  
 CPU Interconnect Bus Link  
 Power Management : Disabled

Sysinfo program /mnt/ramdisk/cpu2017-1.1.5-ic2021.1/bin/sysinfo  
 Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c  
 running on localhost.localdomain Mon Apr 12 22:53:04 2021

SUT (System Under Test) info as seen by some common utilities.  
 For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

From /proc/cpuinfo

```

model name : Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
 2 "physical id"s (chips)
 128 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 32
  siblings  : 64
 physical 0: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
 28 29 30 31
 physical 1: cores 0 1 2 3 4 5 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
 28 29 30 31

```

From lspci:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                128
On-line CPU(s) list:  0-127
Thread(s) per core:    2
Core(s) per socket:    32
Socket(s):              2
NUMA node(s):          4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  106
Model name:             Intel(R) Xeon(R) Gold 6338N CPU @ 2.20GHz
Stepping:               6
CPU MHz:                1805.826
BogoMIPS:               4400.00
Virtualization:        VT-x
L1d cache:              48K
L1i cache:              32K
L2 cache:               1280K
L3 cache:               49152K
NUMA node0 CPU(s):     0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92,96,100,104,108,
112,116,120,124
NUMA node1 CPU(s):     2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94,98,102,106,110
,114,118,122,126
NUMA node2 CPU(s):     1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93,97,101,105,109,
113,117,121,125
NUMA node3 CPU(s):     3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95,99,103,107,111

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

,115,119,123,127

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov  
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid  
aperfperf pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16  
xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave  
avx fl6c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_l3 invpcid\_single  
intel\_ppin ssbd mba ibrs ibpb stibp ibrs\_enhanced fsgsbase tsc\_adjust bmi1 hle avx2  
smep bmi2 erms invpcid cqm rdt\_a avx512f avx512dq rdseed adx smap avx512ifma  
clflushopt clwb intel\_pt avx512cd sha\_ni avx512bw avx512vl xsaveopt xsavec xgetbv1  
xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local split\_lock\_detect wbnoinvd  
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512\_vbmi2 gfni vaes vpclmulqdq  
avx512\_vnni avx512\_bitalg tme avx512\_vpopcntdq la57 rdpid md\_clear pconfig flush\_l1d  
arch\_capabilities

```
/proc/cpuinfo cache data
cache size : 49152 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92 96
100 104 108 112 116 120 124
node 0 size: 125433 MB
node 0 free: 112898 MB
node 1 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94 98
102 106 110 114 118 122 126
node 1 size: 126282 MB
node 1 free: 128043 MB
node 2 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93 97
101 105 109 113 117 121 125
node 2 size: 126263 MB
node 2 free: 127949 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95 99
103 107 111 115 119 123 127
node 3 size: 126216 MB
node 3 free: 128036 MB
node distances:
node  0  1  2  3
 0:  10  11  20  20
 1:  11  10  20  20
 2:  20  20  10  11
 3:  20  20  11  10
```

```
From /proc/meminfo
MemTotal: 527794132 kB
HugePages_Total: 0
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

Hugepagesize: 2048 kB

/sbin/tuned-adm active  
Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="8.3 (Ootpa)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="8.3"

PLATFORM\_ID="platform:el8"

PRETTY\_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"

ANSI\_COLOR="0;31"

redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:8.3:ga

uname -a:

Linux localhost.localdomain 4.18.0-240.15.1.el8\_3.x86\_64 #1 SMP Wed Feb 3 03:12:15 EST 2021 x86\_64 x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

|  |   |
|--|---|
| CVE-2018-12207 (iTLB Multihit):                        | Not affected  |
| CVE-2018-3620 (L1 Terminal Fault):                     | Not affected  |
| Microarchitectural Data Sampling:                      | Not affected  |
| CVE-2017-5754 (Meltdown):                              | Not affected  |
| CVE-2018-3639 (Speculative Store Bypass):              | Mitigation: Speculative Store Bypass disabled via prctl and seccomp |
| CVE-2017-5753 (Spectre variant 1):                     | Mitigation: usercopy/swaps barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2):                     | Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling           |
| CVE-2020-0543 (Special Register Buffer Data Sampling): | Not affected  |
| CVE-2019-11135 (TSX Asynchronous Abort):               | Not affected  |

run-level 5 Apr 12 17:06

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.5-ic2021.1

| Filesystem | Type  | Size | Used | Avail | Use% | Mounted on   |
|------------|-------|------|------|-------|------|--------------|
| tmpfs      | tmpfs | 225G | 6.9G | 219G  | 4%   | /mnt/ramdisk |

From /sys/devices/virtual/dmi/id

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Platform Notes (Continued)

Vendor: Dell Inc.  
Product: PowerEdge R650  
Product Family: PowerEdge  
Serial: 1234567

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

### Memory:

7x 00AD00B300AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200, configured at 2666  
9x 00AD063200AD HMAA4GR7AJR8N-XN 32 GB 2 rank 3200, configured at 2666  
16x Not Specified Not Specified

### BIOS:

BIOS Vendor: Dell Inc.  
BIOS Version: 1.1.2  
BIOS Date: 04/09/2021  
BIOS Revision: 1.1

(End of data from sysinfo program)

## Compiler Version Notes

=====  
C | 519.lbm\_r(base, peak) 538.imagick\_r(base, peak)  
| 544.nab\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 508.namd\_r(base, peak) 510.parest\_r(base, peak)  
-----

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
-----

=====  
C++, C | 511.povray\_r(peak)  
-----

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(peak)

Intel(R) C++ Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112\_000000

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C | 511.povray\_r(base) 526.blender\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 507.cactuBSSN\_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113

(Continued on next page)





# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
Fortran          | 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak)
                  | 554.roms_r(base, peak)
=====
```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
Fortran, C       | 521.wrf_r(peak)
=====
```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
Fortran, C       | 521.wrf_r(base) 527.cam4_r(base, peak)
=====
```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
 Version 2021.1 Build 20201113  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

```
=====
Fortran, C       | 521.wrf_r(peak)
=====
```

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
 Intel(R) 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
 Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R)  
 64, Version 2021.1 Build 20201112\_000000  
 Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Compiler Version Notes (Continued)

=====  
Fortran, C | 521.wrf\_r(base) 527.cam4\_r(base, peak)  
=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on  
Intel(R) 64, Version 2021.1 Build 20201112\_000000  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2021.1 Build 20201113  
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.  
=====

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icx

Benchmarks using both C and C++:

icpx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64  
507.cactuBSSN\_r: -DSPEC\_LP64  
508.namd\_r: -DSPEC\_LP64  
510.parest\_r: -DSPEC\_LP64  
511.povray\_r: -DSPEC\_LP64  
519.lbm\_r: -DSPEC\_LP64  
521.wrf\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
526.blender\_r: -DSPEC\_LP64 -DSPEC\_LINUX -funsigned-char  
527.cam4\_r: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Base Portability Flags (Continued)

538.imagick\_r: -DSPEC\_LP64  
544.nab\_r: -DSPEC\_LP64  
549.fotonik3d\_r: -DSPEC\_LP64  
554.roms\_r: -DSPEC\_LP64

## Base Optimization Flags

### C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both Fortran and C:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using both C and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

### Benchmarks using Fortran, C, and C++:

```
-w -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -O3
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-mbranches-within-32B-boundaries -nostandard-realloc-lhs
-align array32byte -auto -ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

C++ benchmarks:

```
icpx
```

Fortran benchmarks:

```
ifort
```

Benchmarks using both Fortran and C:

```
521.wrf_r: ifort icc
```

```
527.cam4_r: ifort icx
```

Benchmarks using both C and C++:

```
511.povray_r: icpc icc
```

```
526.blender_r: icpx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifort
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Peak Optimization Flags (Continued)

519.lbm\_r: basepeak = yes

538.imagick\_r: basepeak = yes

```
544.nab_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-Ofast -qopt-mem-layout-trans=4
-fimf-accuracy-bits=14:sqrt
-mbranches-within-32B-boundaries -ljemalloc
-L/usr/local/jemalloc64-5.0.1/lib
```

C++ benchmarks:

508.namd\_r: basepeak = yes

```
510.parest_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

Fortran benchmarks:

```
503.bwaves_r: -w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo
-no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs
-align array32byte -auto -mbranches-within-32B-boundaries
-ljemalloc -L/usr/local/jemalloc64-5.0.1/lib
```

549.fotonik3d\_r: basepeak = yes

554.roms\_r: Same as 503.bwaves\_r

Benchmarks using both Fortran and C:

```
521.wrf_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

527.cam4\_r: basepeak = yes

Benchmarks using both C and C++:

(Continued on next page)



# SPEC CPU®2017 Floating Point Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_fp\_base = 363

PowerEdge R650 (Intel Xeon Gold 6338N, 2.20 GHz)

SPECrate®2017\_fp\_peak = 384

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Apr-2021

Hardware Availability: May-2021

Software Availability: Feb-2021

## Peak Optimization Flags (Continued)

```
511.povray_r: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX512 -O3
-ipo -no-prec-div -qopt-prefetch -ffinite-math-only
-qopt-multiple-gather-scatter-by-shuffles
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

526.blender\_r: basepeak = yes

Benchmarks using Fortran, C, and C++:

507.cactuBSSN\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.0.2021-05-18.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml)

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.0.2021-05-18.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.5 on 2021-04-12 23:53:03-0400.

Report generated on 2021-05-18 19:36:29 by CPU2017 PDF formatter v6442.

Originally published on 2021-05-18.