



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

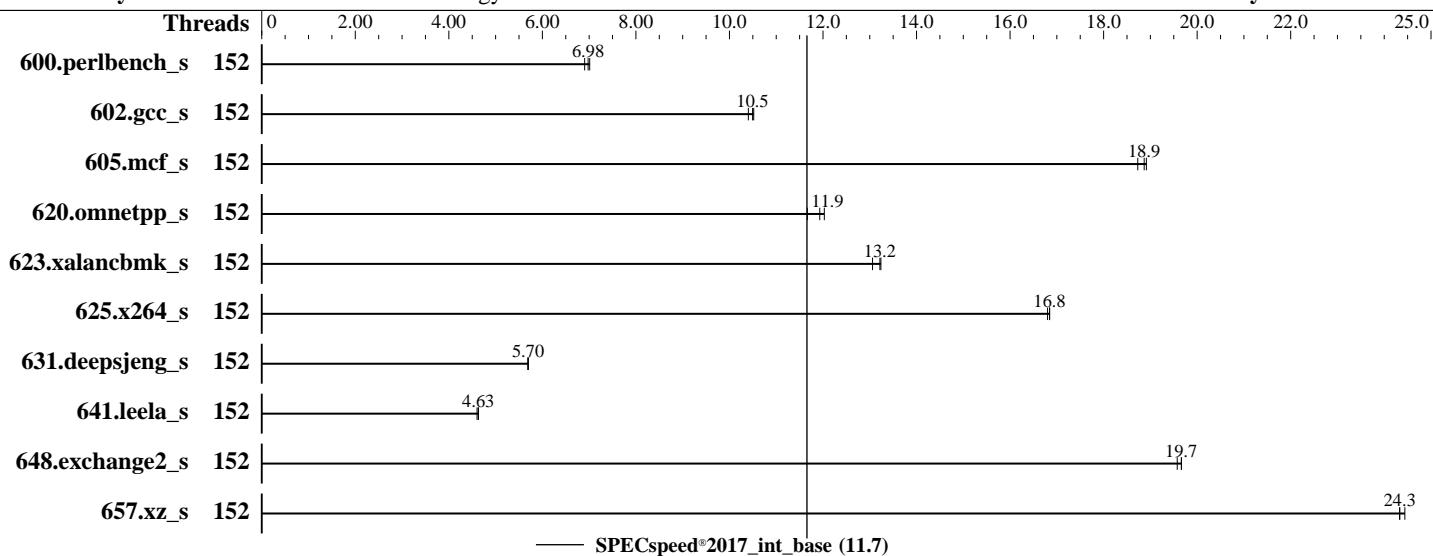

— SPECspeed®2017_int_base (11.7)

Hardware

CPU Name: Intel Xeon Platinum 8368
Max MHz: 3400
Nominal: 2400
Enabled: 76 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1.25 MB I+D on chip per core
L3: 57 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx8 PC4-3200AA-R)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)
Compiler: Kernel 4.18.0-240.el8.x86_64
C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;
C/C++: Version 2021.1 of Intel C/C++ Compiler Classic Build 20201112 for Linux
Parallel: Yes
Firmware: Lenovo BIOS Version AFE109PT1 1.00 released Apr-2021
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	152	257	6.90	<u>254</u>	<u>6.98</u>	253	7.01							
602.gcc_s	152	383	10.4	<u>379</u>	<u>10.5</u>	379	10.5							
605.mcf_s	152	252	18.7	<u>250</u>	<u>18.9</u>	250	18.9							
620.omnetpp_s	152	136	12.0	<u>137</u>	<u>11.9</u>	140	11.7							
623.xalancbmk_s	152	109	13.1	<u>107</u>	<u>13.2</u>	107	13.2							
625.x264_s	152	<u>105</u>	<u>16.8</u>	105	16.8	105	16.8							
631.deepsjeng_s	152	252	5.69	<u>252</u>	<u>5.70</u>	251	5.70							
641.leela_s	152	<u>368</u>	<u>4.63</u>	371	4.60	368	4.63							
648.exchange2_s	152	<u>150</u>	<u>19.7</u>	150	19.6	150	19.7							
657.xz_s	152	<u>254</u>	<u>24.3</u>	254	24.3	253	24.4							

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

```
    "/home/cpu2017-1.1.5-ic2021.1-revB/lib/intel64:/home/cpu2017-1.1.5-ic202
     1.1-revB/je5.0.1-64"
```

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

General Notes (Continued)

jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode
MONITOR/MWAIT set to Enabled

C-States set to Legacy

C1 Enhanced Mode set to Enabled

```
Sysinfo program /home/cpu2017-1.1.5-ic2021.1-revB/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Sun May 16 00:13:37 2021
```

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8368 CPU @ 2.40GHz
  2 "physical id"s (chips)
  152 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 38
  siblings : 76
  physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37
  physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
  25 26 27 28 29 30 31 32 33 34 35 36 37
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                152
On-line CPU(s) list:   0-151
Thread(s) per core:    2
Core(s) per socket:    38
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 106
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

Platform Notes (Continued)

```

Model name: Intel(R) Xeon(R) Platinum 8368 CPU @ 2.40GHz
Stepping: 6
CPU MHz: 3200.000
BogoMIPS: 4800.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 58368K
NUMA node0 CPU(s): 0-37,76-113
NUMA node1 CPU(s): 38-75,114-151
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept
vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqm rdt_a
avx512f avx512dq rdseed adx smap avx512ifma clflushopt clwb intel_pt avx512cd sha_ni
avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku
ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme
avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d arch_capabilities

```

```
/proc/cpuinfo cache data
cache size : 58368 KB
```

```
From numactl --hardware
WARNING: a numactl 'node' might or might not correspond to a
physical chip.
```

```

available: 2 nodes (0-1)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27
28 29 30 31 32 33 34 35 36 37 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94
95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113
node 0 size: 480335 MB
node 0 free: 514738 MB
node 1 cpus: 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62
63 64 65 66 67 68 69 70 71 72 73 74 75 114 115 116 117 118 119 120 121 122 123 124 125
126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147
148 149 150 151
node 1 size: 481646 MB
node 1 free: 515254 MB
node distances:
node 0 1
0: 10 20
1: 20 10

```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

Platform Notes (Continued)

```
From /proc/meminfo
  MemTotal:      1056467804 kB
  HugePages_Total:       0
  Hugepagesize:     2048 kB

/sbin/tuned-adm active
  Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 May 16 00:12

SPEC is set to: /home/cpu2017-1.1.5-ic2021.1-revB
Filesystem Type Size Used Avail Use% Mounted on

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

Platform Notes (Continued)

```
/dev/sdb4      xfs   818G   11G   807G   2% /home
```

```
From /sys/devices/virtual/dmi/id
  Vendor:          Lenovo
  Product:         ThinkSystem SR630 V2 MB
  Product Family: ThinkSystem
  Serial:          1234567890
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
 32x Samsung M393A4G43AB3-CWE 32 GB 2 rank 3200
```

BIOS:

```
  BIOS Vendor:        Lenovo
  BIOS Version:       AFE109PT1-1.00
  BIOS Date:          04/28/2021
  BIOS Revision:      1.0
  Firmware Revision:  1.10
```

(End of data from sysinfo program)

Compiler Version Notes

```
=====
C      | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
      | 625.x264_s(base) 657.xz_s(base)
=====
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
C++    | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
      | 641.leela_s(base)
=====
```

```
-----
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.
-----
```

```
=====
Fortran | 648.exchange2_s(base)
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

Compiler Version Notes (Continued)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-DSPEC_OPENMP -std=c11 -m64 -fopenmp -Wl,-z,muldefs -xCORE-AVX2
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbanches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR630 V2
(2.40 GHz, Intel Xeon Platinum 8368)

SPECspeed®2017_int_base = 11.7

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: May-2021

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jul-2021

Tested by: Lenovo Global Technology

Software Availability: Feb-2021

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-D.html>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-ICELake-D.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.5 on 2021-05-15 12:13:36-0400.

Report generated on 2021-06-08 20:03:48 by CPU2017 PDF formatter v6442.

Originally published on 2021-06-08.