



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

CPU2017 License: 9019


Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

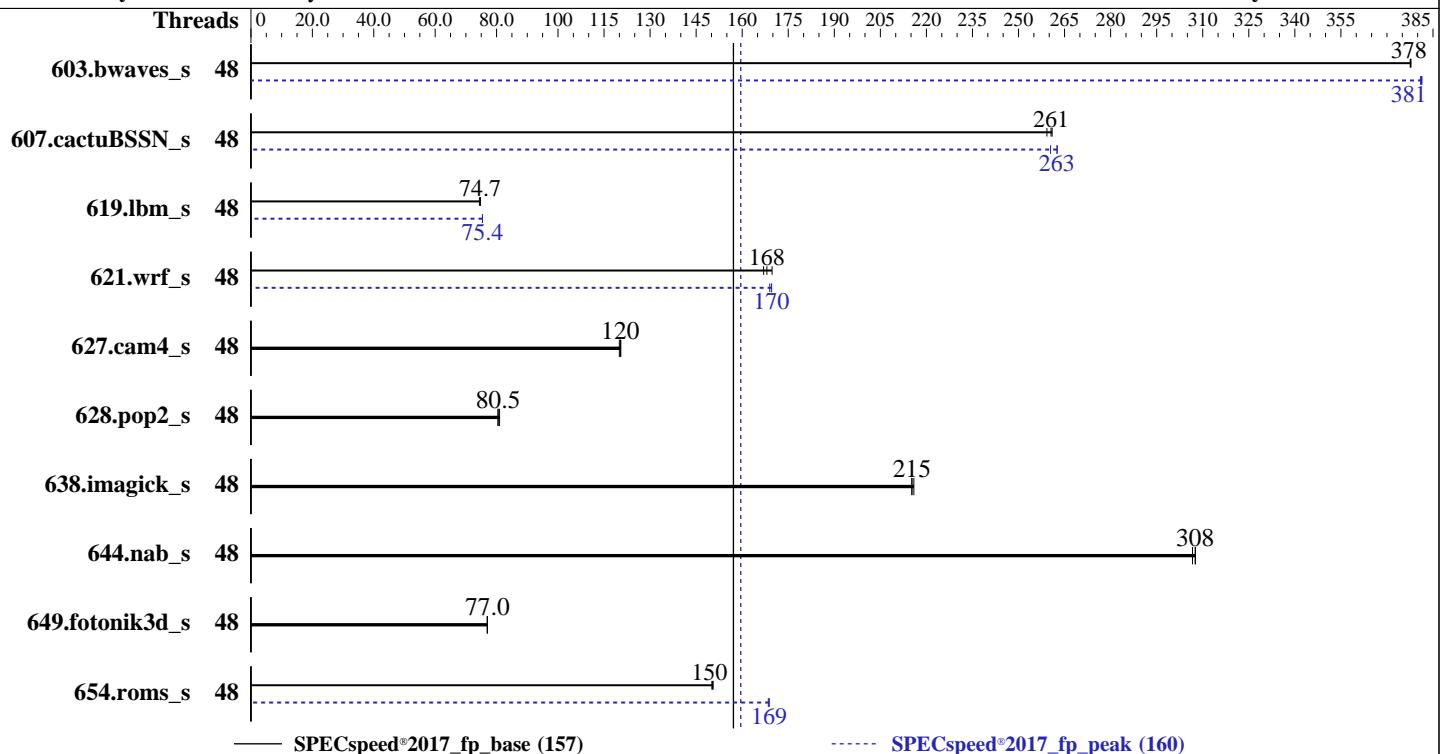

Hardware	
CPU Name:	AMD EPYC 7643
Max MHz:	3600
Nominal:	2300
Enabled:	48 cores, 1 chip
Orderable:	1 chips
Cache L1:	32 KB I + 32 KB D on chip per core
L2:	512 KB I+D on chip per core
L3:	256 MB I+D on chip per chip, 32 MB shared / 6 cores
Other:	None
Memory:	1 TB (8 x 128 GB 4Rx4 PC4-3200V-L)
Storage:	1 x 1.6 TB SSD SATA
Other:	None

Software	
OS:	SUSE Linux Enterprise Server 15 SP3 (x86_64) 5.3.18-57-default
Compiler:	C/C++/Fortran: Version 3.0.0 of AOCC
Parallel:	Yes
Firmware:	Version 4.2.1c released Aug-2021
File System:	xfs
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	64-bit
Other:	jemalloc: jemalloc memory allocator library v5.1.0
Power Management:	BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

**SPECSpeed®2017\_fp\_base = 157**

**SPECSpeed®2017\_fp\_peak = 160**

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	<b><u>156</u></b>	<b><u>378</u></b>	156	378	156	378	48	<b><u>155</u></b>	<b><u>381</u></b>	155	381	155	381
607.cactuBSSN_s	48	63.9	261	<b><u>64.0</u></b>	<b><u>261</u></b>	64.3	259	48	<b><u>63.5</u></b>	<b><u>263</u></b>	63.5	263	64.0	260
619.lbm_s	48	<b><u>70.1</u></b>	<b><u>74.7</u></b>	70.1	74.7	70.4	74.4	48	<b><u>69.5</u></b>	<b><u>75.4</u></b>	<b><u>69.5</u></b>	<b><u>75.4</u></b>	69.5	75.4
621.wrf_s	48	77.9	170	79.2	167	<b><u>78.7</u></b>	<b><u>168</u></b>	48	78.3	169	<b><u>78.0</u></b>	<b><u>170</u></b>	78.0	170
627.cam4_s	48	73.6	120	73.9	120	<b><u>73.7</u></b>	<b><u>120</u></b>	48	73.6	120	73.9	120	<b><u>73.7</u></b>	<b><u>120</u></b>
628.pop2_s	48	<b><u>147</u></b>	<b><u>80.5</u></b>	148	80.4	147	81.0	48	<b><u>147</u></b>	<b><u>80.5</u></b>	148	80.4	147	81.0
638.imagick_s	48	67.0	215	<b><u>67.0</u></b>	<b><u>215</u></b>	66.8	216	48	67.0	215	<b><u>67.0</u></b>	<b><u>215</u></b>	66.8	216
644.nab_s	48	56.8	308	57.0	307	<b><u>56.8</u></b>	<b><u>308</u></b>	48	56.8	308	57.0	307	<b><u>56.8</u></b>	<b><u>308</u></b>
649.fotonik3d_s	48	118	77.0	<b><u>118</u></b>	<b><u>77.0</u></b>	119	76.9	48	118	77.0	<b><u>118</u></b>	<b><u>77.0</u></b>	119	76.9
654.roms_s	48	<b><u>105</u></b>	<b><u>150</u></b>	105	151	105	150	48	<b><u>93.3</u></b>	<b><u>169</u></b>	93.4	169	93.3	169

**SPECSpeed®2017\_fp\_base = 157**

**SPECSpeed®2017\_fp\_peak = 160**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

SPECSPEED®2017\_fp\_base = 157

SPECSPEED®2017\_fp\_peak = 160

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

## Operating System Notes (Continued)

```
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"  
LD_LIBRARY_PATH =  
    "/home/cpu2017/amd_speed_aocc300_milan_B_lib/lib;/home/cpu2017/amd_speed  
    _aocc300_milan_B_lib/lib32:"  
MALLOC_CONF = "retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "16G"  
OMP_THREAD_LIMIT = "48"
```

Environment variables set by runcpu during the 603.bwaves\_s peak run:

```
GOMP_CPU_AFFINITY = "0 24 1 25 2 26 3 27 4 28 5 29 6 30 7 31 8 32 9 33 10 34  
    11 35 12 36 13 37 14 38 15 39 16 40 17 41 18 42 19 43 20 44 21 45 22 46  
    23 47"
```

Environment variables set by runcpu during the 607.cactubssn\_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 619.lbm\_s peak run:

```
GOMP_CPU_AFFINITY = "0 24 1 25 2 26 3 27 4 28 5 29 6 30 7 31 8 32 9 33 10 34  
    11 35 12 36 13 37 14 38 15 39 16 40 17 41 18 42 19 43 20 44 21 45 22 46  
    23 47"
```

Environment variables set by runcpu during the 621.wrf\_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

Environment variables set by runcpu during the 654.roms\_s peak run:

```
GOMP_CPU_AFFINITY = "0-47"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 7742 CPU + 1TiB Memory using openSUSE 15.2

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

SPECspeed®2017\_fp\_base = 157

SPECspeed®2017\_fp\_peak = 160

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

## General Notes (Continued)

jemalloc: configured and built with GCC v4.8.2 in RHEL 7.4 (No options specified)

jemalloc 5.1.0 is available here:

<https://github.com/jemalloc/jemalloc/releases/download/5.1.0/jemalloc-5.1.0.tar.bz2>

## Platform Notes

SMT Mode set to Disabled

NUMA nodes per socket set to NPS1

ACPI SRAT L3 Cache As NUMA Domain set to Enabled

DRAM Scrub Time set to Disabled

Determinism Slider set to Power

L1 Stream HW Prefetcher set to Enabled

APBDIS set to 1

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

running on localhost Sat Dec 4 00:08:46 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : AMD EPYC 7643 48-Core Processor

1 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 48

siblings : 48

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29  
32 33 34 35 36 37 40 41 42 43 44 45 48 49 50 51 52 53 56 57 58 59 60 61

From lscpu from util-linux 2.36.2:

Architecture: x86\_64

CPU op-mode(s): 32-bit, 64-bit

Byte Order: Little Endian

Address sizes: 48 bits physical, 48 bits virtual

CPU(s): 48

On-line CPU(s) list: 0-47

Thread(s) per core: 1

Core(s) per socket: 48

Socket(s): 1

NUMA node(s): 8

Vendor ID: AuthenticAMD

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

## Platform Notes (Continued)

CPU family:	25
Model:	1
Model name:	AMD EPYC 7643 48-Core Processor
Stepping:	1
Frequency boost:	enabled
CPU MHz:	1776.497
CPU max MHz:	2300.0000
CPU min MHz:	1500.0000
BogoMIPS:	4591.26
Virtualization:	AMD-V
L1d cache:	1.5 MiB
L1i cache:	1.5 MiB
L2 cache:	24 MiB
L3 cache:	256 MiB
NUMA node0 CPU(s):	0-5
NUMA node1 CPU(s):	6-11
NUMA node2 CPU(s):	12-17
NUMA node3 CPU(s):	18-23
NUMA node4 CPU(s):	24-29
NUMA node5 CPU(s):	30-35
NUMA node6 CPU(s):	36-41
NUMA node7 CPU(s):	42-47
Vulnerability Itlb multihit:	Not affected
Vulnerability L1tf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full AMD retpoline, IBPB conditional, IBRS_FW, STIBP disabled, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 movbe popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13 invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsqsbbase bmil avx2 smep bmi2 invpcid cqmq rdt_a rdseed adx smap clflushopt clwb sha_ni xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local clzero irperf xsaveerptr wbnoinvd amd_ppin arat npt lbrv svm_lock nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter pfthreshold v_vmsave_vmload vgif umip pku ospke vaes vpclmulqdq rdpid overflow_recov succor smca

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

CPU2017 License: 9019

Test Date: Dec-2021

Test Sponsor: Cisco Systems

Hardware Availability: Jun-2021

Tested by: Cisco Systems

Software Availability: Jun-2021

## Platform Notes (Continued)

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	512K	24M	8	Unified	2	1024	1	64
L3	32M	256M	16	Unified	3	32768	1	64

/proc/cpuinfo cache data  
cache size : 512 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)  
node 0 cpus: 0 1 2 3 4 5  
node 0 size: 128838 MB  
node 0 free: 128573 MB  
node 1 cpus: 6 7 8 9 10 11  
node 1 size: 129022 MB  
node 1 free: 128905 MB  
node 2 cpus: 12 13 14 15 16 17  
node 2 size: 129022 MB  
node 2 free: 128771 MB  
node 3 cpus: 18 19 20 21 22 23  
node 3 size: 129022 MB  
node 3 free: 128856 MB  
node 4 cpus: 24 25 26 27 28 29  
node 4 size: 128988 MB  
node 4 free: 128855 MB  
node 5 cpus: 30 31 32 33 34 35  
node 5 size: 129022 MB  
node 5 free: 128902 MB  
node 6 cpus: 36 37 38 39 40 41  
node 6 size: 129022 MB  
node 6 free: 128897 MB  
node 7 cpus: 42 43 44 45 46 47  
node 7 size: 116908 MB  
node 7 free: 116697 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 11 11 11 11 11 11 11  
1: 11 10 11 11 11 11 11 11  
2: 11 11 10 11 11 11 11 11  
3: 11 11 11 10 11 11 11 11  
4: 11 11 11 11 10 11 11 11  
5: 11 11 11 11 11 10 11 11  
6: 11 11 11 11 11 11 10 11

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Platform Notes (Continued)

7: 11 11 11 11 11 11 11 11 10

From /proc/meminfo

MemTotal: 1044322708 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

/sys/devices/system/cpu/cpu\*/cpufreq/scaling\_governor has performance

From /etc/\*release\* /etc/\*version\*

os-release:  
NAME="SLES"  
VERSION="15-SP3"  
VERSION\_ID="15.3"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15 SP3"  
ID="sles"  
ID\_LIKE="suse"  
ANSI\_COLOR="0;32"  
CPE\_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:

Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021 (ba3c2e9) x86\_64 x86\_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swapgs barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Full AMD retrpoline, IBPB: conditional, IBRS_FW, STIBP: disabled, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Dec 3 15:03

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
------------	------	------	------	-------	------	------------

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Platform Notes (Continued)

```
/dev/nvme0n1p3 xfs 1.5T 12G 1.5T 1% /
```

```
From /sys/devices/virtual/dmi/id
  Vendor: Cisco Systems Inc
  Product: UCSC-C225-M6N
  Serial: WZP25230TMY
```

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
Memory:
 8x 0xCE00 M386AAG40AM3-CWE 128 GB 4 rank 3200
```

BIOS:

```
  BIOS Vendor: Cisco Systems, Inc.
  BIOS Version: C225M6.4.2.1c.0.0806211349
  BIOS Date: 08/06/2021
  BIOS Revision: 5.22
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)
   | 644.nab_s(base, peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
-----

=====
C++, C, Fortran | 607.cactuBSSN_s(base, peak)
-----
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin
AMD clang version 12.0.0 (CLANG: AOCC_3.0.0-Build#78 2020_12_10) (based on
  LLVM Mirror.Version.12.0.0)
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

**SPECSpeed®2017\_fp\_base = 157**

**SPECSpeed®2017\_fp\_peak = 160**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Dec-2021

**Hardware Availability:** Jun-2021

**Software Availability:** Jun-2021

## Compiler Version Notes (Continued)

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

---

=====

Fortran	603.bwaves_s(base, peak) 649.fotonik3d_s(base, peak)
	654.roms_s(base, peak)

---

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

---

=====

Fortran, C	621.wrf_s(base, peak) 627.cam4_s(base, peak)
	628.pop2_s(base, peak)

---

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

AMD clang version 12.0.0 (CLANG: AOCC\_3.0.0-Build#78 2020\_12\_10) (based on LLVM Mirror.Version.12.0.0)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc-compiler-3.0.0/bin

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Compiler Invocation (Continued)

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapi -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapi -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -z muldefs  
-DSPEC\_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang -lflangrti

Fortran benchmarks:

-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Hz,1,0x1 -O3  
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive  
-mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

SPECspeed®2017\_fp\_base = 157

SPECspeed®2017\_fp\_peak = 160

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -z muldefs -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

Benchmarks using both Fortran and C:

```
-m64 -mno-adx -mno-sse4a -Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp -Wl,-mllvm -Wl,-region-vectorize  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3 -Hz,1,0x1  
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop -z muldefs  
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm -ljemalloc  
-lflang -lflangrti
```

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false  
-Wl,-mllvm -Wl,-region-vectorize -Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -mllvm -function-specialize -flv-function-specialization  
-mllvm -enable-gvn-hoist -mllvm -global-vectorize-slp=true  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-mllvm -enable-partial-unswitch -mllvm -unroll-threshold=100  
-finline-aggressive -mllvm -loop-unswitch-threshold=200000  
-mllvm -reroll-loops -mllvm -aggressive-loop-unswitch  
-mllvm -extra-vectorizer-passes -mllvm -convert-pow-exp-to-int=false  
-Hz,1,0x1 -Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -lsr-in-nested-loop -z muldefs -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang -lflangrti
```

## Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Base Other Flags (Continued)

Fortran benchmarks:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using both Fortran and C:

-Wno-unused-command-line-argument -Wno-return-type

Benchmarks using Fortran, C, and C++:

-Wno-unused-command-line-argument -Wno-return-type

## Peak Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
619.lbm_s: -m64 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fsto  
-fstruct-layout=5 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Peak Optimization Flags (Continued)

619.lbm\_s (continued):

```
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

```
603.bwaves_s: -m64 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -Mrecursive  
-mllvm -reduce-array-computations=3  
-mllvm -global-vectorize-slp=true -mllvm -enable-licm-vrp  
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm  
-ljemalloc -lflang
```

649.fotonik3d\_s: basepeak = yes

654.roms\_s: Same as 603.bwaves\_s

Benchmarks using both Fortran and C:

```
621.wrf_s: -m64 -mno-adx -mno-sse4a  
-Wl,-mllvm -Wl,-enable-X86-prefetching  
-Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast  
-march=znver3 -fveclib=AMDLIBM -ffast-math -fsto  
-fstruct-layout=5 -mllvm -unroll-threshold=50  
-fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true  
-mllvm -function-specialize -mllvm -enable-licm-vrp  
-mllvm -reduce-array-computations=3 -Hz,1,0x1 -O3  
-Mrecursive -mllvm -fuse-tile-inner-loop -funroll-loops  
-mllvm -extra-vectorizer-passes -mllvm -lsr-in-nested-loop
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

SPECspeed®2017\_fp\_base = 157

SPECspeed®2017\_fp\_peak = 160

CPU2017 License: 9019

Test Sponsor: Cisco Systems

Tested by: Cisco Systems

Test Date: Dec-2021

Hardware Availability: Jun-2021

Software Availability: Jun-2021

## Peak Optimization Flags (Continued)

621.wrf\_s (continued):

```
-DSPEC_OPENMP -fopenmp -fopenmp=libomp -lomp -lamdlibm  
-ljemalloc -lflang
```

627.cam4\_s: basepeak = yes

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

```
-m64 -mno-adx -mno-sse4a -std=c++98  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -Wl,-mllvm -Wl,-enable-licm-vrp  
-Wl,-mllvm -Wl,-function-specialize  
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -Ofast -march=znver3  
-fveclib=AMDLIBM -ffast-math -flto -fstruct-layout=5  
-mllvm -unroll-threshold=50 -fremap-arrays -flv-function-specialization  
-mllvm -inline-threshold=1000 -mllvm -enable-gvn-hoist  
-mllvm -global-vectorize-slp=true -mllvm -function-specialize  
-mllvm -enable-licm-vrp -mllvm -reduce-array-computations=3  
-finline-aggressive -mllvm -unroll-threshold=100 -mllvm -reroll-loops  
-mllvm -aggressive-loop-unswitch -Mrecursive -DSPEC_OPENMP -fopenmp  
-fopenmp=libomp -lomp -lamdlibm -ljemalloc -lflang
```

## Peak Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using both Fortran and C:

```
-Wno-unused-command-line-argument -Wno-return-type
```

Benchmarks using Fortran, C, and C++:

```
-Wno-unused-command-line-argument -Wno-return-type
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.html>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.html>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C225 M6 (AMD EPYC 7643 48-Core)

SPECSpeed®2017\_fp\_base = 157

SPECSpeed®2017\_fp\_peak = 160

**CPU2017 License:** 9019

**Test Date:** Dec-2021

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Jun-2021

**Tested by:** Cisco Systems

**Software Availability:** Jun-2021

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc300-flags-B2.xml>

<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-AMD-v2-revC.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-04 03:08:46-0500.

Report generated on 2021-12-22 12:37:36 by CPU2017 PDF formatter v6442.

Originally published on 2021-12-21.