



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19


Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Nov-2018

Software Availability: Jun-2021

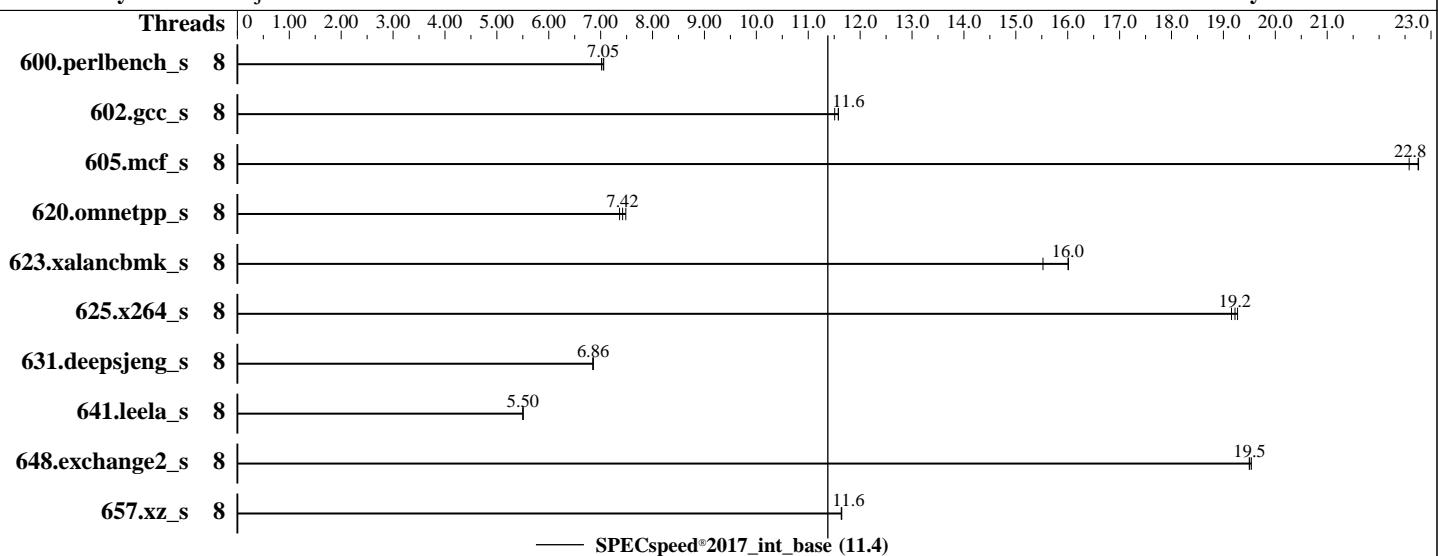

Hardware

CPU Name: Intel Xeon E-2134
Max MHz: 4500
Nominal: 3500
Enabled: 4 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 256 KB I+D on chip per core
L3: 8 MB I+D on chip per chip
Other: None
Memory: 128 GB (4 x 32 GB 2Rx8 PC4-2666V-E)
Storage: 1 x SATA M.2 SSD, 480GB
Other: None

OS:

SUSE Linux Enterprise Server 15 SP3
5.3.18-57-default

Compiler:

C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
Compiler Build 20201113 for Linux;
Fortran: Version 2021.1 of Intel Fortran Compiler
Classic Build 20201112 for Linux;

Parallel:

Yes

Firmware:

Fujitsu BIOS Version V5.0.0.13 R1.18.0 for
D3673-A1x. Released Jul-2021

File System:

xfs

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

Not Applicable

Other:

jemalloc memory allocator V5.0.1

Power Management:

BIOS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Nov-2018

Software Availability: Jun-2021

Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
600.perlbench_s	8	253	7.02	251	7.06	<u>252</u>	<u>7.05</u>							
602.gcc_s	8	<u>344</u>	<u>11.6</u>	344	11.6	346	11.5							
605.mcf_s	8	207	22.8	209	22.6	<u>208</u>	<u>22.8</u>							
620.omnetpp_s	8	<u>220</u>	<u>7.42</u>	218	7.48	221	7.36							
623.xalancbmk_s	8	88.5	16.0	<u>88.5</u>	<u>16.0</u>	91.3	15.5							
625.x264_s	8	91.5	19.3	<u>91.8</u>	<u>19.2</u>	92.1	19.2							
631.deepsjeng_s	8	209	6.85	<u>209</u>	<u>6.86</u>	209	6.86							
641.leela_s	8	310	5.50	310	5.50	<u>310</u>	<u>5.50</u>							
648.exchange2_s	8	151	19.5	150	19.5	<u>151</u>	<u>19.5</u>							
657.xz_s	8	<u>531</u>	<u>11.6</u>	531	11.6	531	11.6							

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,scatter"

LD_LIBRARY_PATH =

"/home/benchmark/speccpu/lib/intel64:/home/benchmark/speccpu/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Nov-2018

Tested by: Fujitsu

Software Availability: Jun-2021

General Notes (Continued)

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

DCU Streamer Prefetcher = Disabled

DDR PowerDown and idle counter = PCODE

CState Pre-Wake = Disabled

Package C-State Un-demotion = Enabled

REFRESH_2X_MODE = 1 - Enabled for WARM or HOT

Sysinfo program /home/benchmark/speccpu/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d

running on localhost Fri Dec 17 02:44:45 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz
  1 "physical id"s (chips)
  8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 4
  siblings   : 8
  physical 0: cores 0 1 2 3
```

From lscpu from util-linux 2.36.2:

Architecture:	x86_64
CPU op-mode(s):	32-bit, 64-bit
Byte Order:	Little Endian
Address sizes:	39 bits physical, 48 bits virtual
CPU(s):	8
On-line CPU(s) list:	0-7
Thread(s) per core:	2
Core(s) per socket:	4
Socket(s):	1
NUMA node(s):	1
Vendor ID:	GenuineIntel
CPU family:	6
Model:	158
Model name:	Intel(R) Xeon(R) E-2134 CPU @ 3.50GHz
Stepping:	10

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Date: Dec-2021

Test Sponsor: Fujitsu

Hardware Availability: Nov-2018

Tested by: Fujitsu

Software Availability: Jun-2021

Platform Notes (Continued)

CPU MHz:	3697.812
CPU max MHz:	4500.0000
CPU min MHz:	800.0000
BogoMIPS:	6999.82
Virtualization:	VT-x
L1d cache:	128 KiB
L1i cache:	128 KiB
L2 cache:	1 MiB
L3 cache:	8 MiB
NUMA node0 CPU(s):	0-7
Vulnerability Itlb multihit:	KVM: Mitigation: VMX disabled
Vulnerability L1tf:	Mitigation; PTE Inversion; VMX conditional cache flushes, SMT vulnerable
Vulnerability Mds:	Mitigation; Clear CPU buffers; SMT vulnerable
Vulnerability Meltdown:	Mitigation; PTI
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Full generic retpoline, IBPB conditional, IBRS_FW, STIBP conditional, RSB filling
Vulnerability Srbds:	Mitigation; Microcode
Vulnerability Tsx async abort:	Mitigation; Clear CPU buffers; SMT vulnerable
Flags:	fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbe fma cx16 xtpr pdcm pcid sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb invpcid_single pt1 ssbd ibrs ibpb stibp tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm mpx rdseed adx smap clflushopt intel_pt xsaveopt xsavec xgetbv1 xsaves dtherm ida arat pln pts hwp hwp_notify hwp_act_window hwp_epp md_clear flush_ll1d

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	128K	8	Data	1	64	1	64
L1i	32K	128K	8	Instruction	1	64	1	64
L2	256K	1M	4	Unified	2	1024	1	64
L3	8M	8M	16	Unified	3	8192	1	64

/proc/cpuinfo cache data
cache size : 8192 KB

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.
available: 1 nodes (0)

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Nov-2018

Software Availability: Jun-2021

Platform Notes (Continued)

```
node 0 cpus: 0 1 2 3 4 5 6 7
node 0 size: 128303 MB
node 0 free: 127825 MB
node distances:
node 0
 0: 10

From /proc/meminfo
  MemTotal:       131383072 kB
  HugePages_Total:       0
  Hugepagesize:        2048 kB

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
powersave

From /etc/*release* /etc/*version*
os-release:
  NAME="SLES"
  VERSION="15-SP3"
  VERSION_ID="15.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 15 SP3"
  ID="sles"
  ID_LIKE="suse"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:15:sp3"

uname -a:
  Linux localhost 5.3.18-57-default #1 SMP Wed Apr 28 10:54:41 UTC 2021
  (ba3c2e9/1p-5d9e8aa) x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):
CVE-2018-3620 (L1 Terminal Fault):

Microarchitectural Data Sampling:
CVE-2017-5754 (Meltdown):
CVE-2018-3639 (Speculative Store Bypass):

CVE-2017-5753 (Spectre variant 1):
CVE-2017-5715 (Spectre variant 2):
```

KVM: Mitigation: VMX disabled
Mitigation: PTE Inversion; VMX:
conditional cache flushes, SMT
vulnerable

Mitigation: Clear CPU buffers; SMT
vulnerable

Mitigation: PTI

Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp

Mitigation: usercopy/swapgs
barriers and __user pointer
sanitization

Mitigation: Full generic
retpoline, IBPB: conditional,

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Nov-2018

Software Availability: Jun-2021

Platform Notes (Continued)

IBRS_FW, STIBP: conditional, RSB
filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Mitigation: Microcode

CVE-2019-11135 (TSX Asynchronous Abort):

Mitigation: Clear CPU buffers; SMT
vulnerable

run-level 3 Dec 17 02:42

SPEC is set to: /home/benchmark/speccpu

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda8	xfs	121G	19G	103G	16%	/home

From /sys/devices/virtual/dmi/id

Vendor:	FUJITSU
Product:	PRIMERGY TX1320 M4
Product Family:	SERVER
Serial:	YMKJXXXXXX

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

4x Samsung M391A4G43MB1-CTD 32 GB 2 rank 2667

BIOS:

BIOS Vendor:	FUJITSU // American Megatrends Inc.
BIOS Version:	V5.0.0.13 R1.18.0 for D3673-A1x
BIOS Date:	07/12/2021
BIOS Revision:	1.18

(End of data from sysinfo program)

Compiler Version Notes

=====

C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
| 625.x264_s(base) 657.xz_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)

=====

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Nov-2018

Software Availability: Jun-2021

Compiler Version Notes (Continued)

| 641.leela_s(base)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 648.exchange2_s(base)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX1320 M4, Intel Xeon E-2134,
3.50GHz

SPECspeed®2017_int_base = 11.4

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 19

Test Sponsor: Fujitsu

Tested by: Fujitsu

Test Date: Dec-2021

Hardware Availability: Nov-2018

Software Availability: Jun-2021

Base Optimization Flags

C benchmarks:

```
-DSPEC_OPENMP -std=c11 -m64 -fopenmp -Wl,-z,muldefs -xCORE-AVX2  
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

C++ benchmarks:

```
-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX2 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin/  
-lqkmalloc
```

Fortran benchmarks:

```
-m64 -xCORE-AVX2 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-mbranches-within-32B-boundaries
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/Fujitsu-Platform-Settings-V1.0.2-CFL-RevD.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2021-12-16 12:44:44-0500.

Report generated on 2022-01-05 13:33:24 by CPU2017 PDF formatter v6442.

Originally published on 2022-01-04.