



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Feb-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

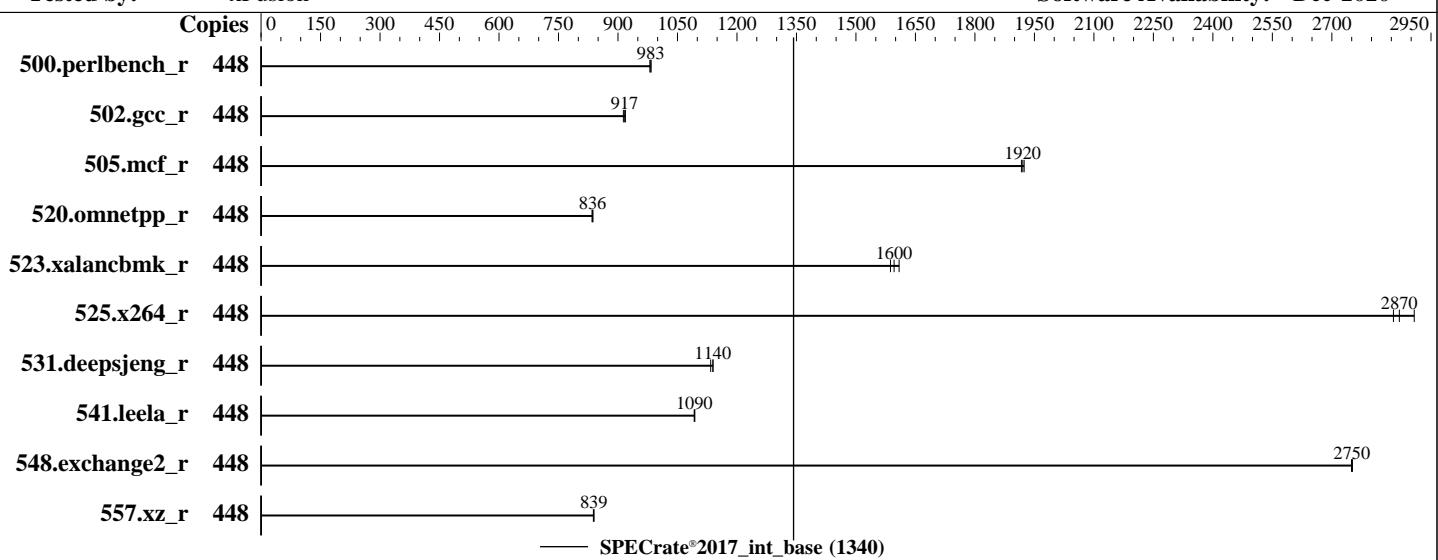

Hardware

CPU Name: Intel Xeon Platinum 8280
 Max MHz: 4000
 Nominal: 2700
 Enabled: 224 cores, 8 chips, 2 threads/core
 Orderable: 2,4,6,8 chip
 Cache L1: 32 KB I + 32 KB D on chip per core
 L2: 1 MB I+D on chip per core
 L3: 38.5 MB I+D on chip per chip
 Other: None
 Memory: 3 TB (96 x 32 GB 2Rx4 PC4-2933Y-R)
 Storage: 1 x 2400 GB SAS, 10000 RPM
 Other: None

OS:

Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64

Compiler:

C/C++: Version 2021.1 of Intel oneAPI DPC++/C++ Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler Classic Build 20201112 for Linux;

Parallel:

No

Firmware:

Version 8.18 released Sep-2021

File System:

ext4

System State:

Run level 3 (multi-user)

Base Pointers:

64-bit

Peak Pointers:

Not Applicable

Other:

None

Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.

Software



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Feb-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Dec-2020

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	448	728	980	725	983	726	983									
502.gcc_r	448	691	919	692	917	694	914									
505.mcf_r	448	377	1920	378	1920	376	1920									
520.omnetpp_r	448	703	836	704	835	702	837									
523.xalancbmk_r	448	296	1600	298	1590	294	1610									
525.x264_r	448	275	2860	273	2870	270	2910									
531.deepsjeng_r	448	453	1130	451	1140	450	1140									
541.leela_r	448	679	1090	679	1090	678	1090									
548.exchange2_r	448	427	2750	427	2750	427	2750									
557.xz_r	448	576	839	577	839	577	838									

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/home/spec/lib/intel64:/home/spec/lib/ia32:/home/spec/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM memory using Red Hat Enterprise Linux 8.1

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Feb-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Dec-2020

General Notes (Continued)

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Power Policy Set to Performance

SNC Set to Enabled

IMC (Integrated memory controller) Interleaving set to 1 way interleave

Xtended Prediction Table (XPT) Prefetch set to Enabled

Last Level Cache (LLC) Prefetch set to Disabled

Sysinfo program /home/spec/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acaf64d

running on localhost.localdomain Fri Feb 11 20:34:03 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz

8 "physical id"s (chips)

448 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 28

siblings : 56

physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

physical 2: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

physical 3: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

physical 4: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

physical 5: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30

physical 6: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488
Test Sponsor: xFusion
Tested by: xFusion

Test Date: Feb-2022
Hardware Availability: Apr-2019
Software Availability: Dec-2020

Platform Notes (Continued)

```
28 29 30
physical 7: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14 16 17 18 19 20 21 22 24 25 26 27
28 29 30
```

```
From lscpu from util-linux 2.32.1:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:              Little Endian
CPU(s):                 448
On-line CPU(s) list:   0-447
Thread(s) per core:    2
Core(s) per socket:    28
Socket(s):              8
NUMA node(s):           16
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Platinum 8280 CPU @ 2.70GHz
Stepping:               7
CPU MHz:                3300.004
CPU max MHz:            4000.0000
CPU min MHz:            1000.0000
BogoMIPS:               5400.00
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:               1024K
L3 cache:               39424K
NUMA node0 CPU(s):      0-3,7-9,14-17,21-23,224-227,231-233,238-241,245-247
NUMA node1 CPU(s):      4-6,10-13,18-20,24-27,228-230,234-237,242-244,248-251
NUMA node2 CPU(s):      28-31,35-37,42-45,49-51,252-255,259-261,266-269,273-275
NUMA node3 CPU(s):      32-34,38-41,46-48,52-55,256-258,262-265,270-272,276-279
NUMA node4 CPU(s):      56-59,63-65,70-73,77-79,280-283,287-289,294-297,301-303
NUMA node5 CPU(s):      60-62,66-69,74-76,80-83,284-286,290-293,298-300,304-307
NUMA node6 CPU(s):      84-87,91-93,98-101,105-107,308-311,315-317,322-325,329-331
NUMA node7 CPU(s):      88-90,94-97,102-104,108-111,312-314,318-321,326-328,332-335
NUMA node8 CPU(s):      112-115,119-121,126-129,133-135,336-339,343-345,350-353,357-359
NUMA node9 CPU(s):      116-118,122-125,130-132,136-139,340-342,346-349,354-356,360-363
NUMA node10 CPU(s):     140-143,147-149,154-157,161-163,364-367,371-373,378-381,385-387
NUMA node11 CPU(s):     144-146,150-153,158-160,164-167,368-370,374-377,382-384,388-391
NUMA node12 CPU(s):     168-171,175-177,182-185,189-191,392-395,399-401,406-409,413-415
NUMA node13 CPU(s):     172-174,178-181,186-188,192-195,396-398,402-405,410-412,416-419
NUMA node14 CPU(s):     196-199,203-205,210-213,217-219,420-423,427-429,434-437,441-443
NUMA node15 CPU(s):     200-202,206-209,214-216,220-223,424-426,430-433,438-440,444-447
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Feb-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Dec-2020

Platform Notes (Continued)

```
aperfmpfperf pni pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm
pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c
rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd
mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad
fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq mpx rdt_a avx512f
avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl
xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_lld arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 39424 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0 1 2 3 7 8 9 14 15 16 17 21 22 23 224 225 226 227 231 232 233 238 239 240
241 245 246 247

node 0 size: 189428 MB

node 0 free: 191308 MB

node 1 cpus: 4 5 6 10 11 12 13 18 19 20 24 25 26 27 228 229 230 234 235 236 237 242 243
244 248 249 250 251

node 1 size: 191199 MB

node 1 free: 193163 MB

node 2 cpus: 28 29 30 31 35 36 37 42 43 44 45 49 50 51 252 253 254 255 259 260 261 266
267 268 269 273 274 275

node 2 size: 190427 MB

node 2 free: 193015 MB

node 3 cpus: 32 33 34 38 39 40 41 46 47 48 52 53 54 55 256 257 258 262 263 264 265 270
271 272 276 277 278 279

node 3 size: 190523 MB

node 3 free: 190749 MB

node 4 cpus: 56 57 58 59 63 64 65 70 71 72 73 77 78 79 280 281 282 283 287 288 289 294
295 296 297 301 302 303

node 4 size: 191379 MB

node 4 free: 193340 MB

node 5 cpus: 60 61 62 66 67 68 69 74 75 76 80 81 82 83 284 285 286 290 291 292 293 298
299 300 304 305 306 307

node 5 size: 191353 MB

node 5 free: 193356 MB

node 6 cpus: 84 85 86 87 91 92 93 98 99 100 101 105 106 107 308 309 310 311 315 316 317
322 323 324 325 329 330 331

node 6 size: 191165 MB

node 6 free: 190078 MB

node 7 cpus: 88 89 90 94 95 96 97 102 103 104 108 109 110 111 312 313 314 318 319 320
321 326 327 328 332 333 334 335

node 7 size: 191349 MB

node 7 free: 192028 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Feb-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Dec-2020

Platform Notes (Continued)

```
node 8 cpus: 112 113 114 115 119 120 121 126 127 128 129 133 134 135 336 337 338 339  
343 344 345 350 351 352 353 357 358 359  
node 8 size: 191363 MB  
node 8 free: 193281 MB  
node 9 cpus: 116 117 118 122 123 124 125 130 131 132 136 137 138 139 340 341 342 346  
347 348 349 354 355 356 360 361 362 363  
node 9 size: 191275 MB  
node 9 free: 193352 MB  
node 10 cpus: 140 141 142 143 147 148 149 154 155 156 157 161 162 163 364 365 366 367  
371 372 373 378 379 380 381 385 386 387  
node 10 size: 191251 MB  
node 10 free: 193346 MB  
node 11 cpus: 144 145 146 150 151 152 153 158 159 160 164 165 166 167 368 369 370 374  
375 376 377 382 383 384 388 389 390 391  
node 11 size: 191159 MB  
node 11 free: 193350 MB  
node 12 cpus: 168 169 170 171 175 176 177 182 183 184 185 189 190 191 392 393 394 395  
399 400 401 406 407 408 409 413 414 415  
node 12 size: 191291 MB  
node 12 free: 189549 MB  
node 13 cpus: 172 173 174 178 179 180 181 186 187 188 192 193 194 195 396 397 398 402  
403 404 405 410 411 412 416 417 418 419  
node 13 size: 191495 MB  
node 13 free: 193343 MB  
node 14 cpus: 196 197 198 199 203 204 205 210 211 212 213 217 218 219 420 421 422 423  
427 428 429 434 435 436 437 441 442 443  
node 14 size: 191421 MB  
node 14 free: 193319 MB  
node 15 cpus: 200 201 202 206 207 208 209 214 215 216 220 221 222 223 424 425 426 430  
431 432 433 438 439 440 444 445 446 447  
node 15 size: 190737 MB  
node 15 free: 192771 MB  
node distances:  
node 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15  
0: 10 11 31 31 21 21 21 21 21 31 31 31 31 31 31 31  
1: 11 10 31 31 21 21 21 21 21 31 31 31 31 31 31 31  
2: 31 31 10 11 21 21 21 21 31 31 21 21 31 31 31 31  
3: 31 31 11 10 21 21 21 21 31 31 21 21 31 31 31 31  
4: 21 21 21 21 10 11 31 31 31 31 31 31 21 21 31 31  
5: 21 21 21 21 11 10 31 31 31 31 31 31 21 21 31 31  
6: 21 21 21 21 31 31 10 11 31 31 31 31 31 31 21 21  
7: 21 21 21 21 31 31 11 10 31 31 31 31 31 31 21 21  
8: 21 21 31 31 31 31 31 31 10 11 21 21 31 31 21 21  
9: 21 21 31 31 31 31 31 31 11 10 21 21 31 31 21 21  
10: 31 31 21 21 31 31 31 31 21 21 10 11 21 21 31 31  
11: 31 31 21 21 31 31 31 31 21 21 11 10 21 21 31 31  
12: 31 31 31 31 21 21 31 31 31 31 21 21 10 11 21 21
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECrate®2017_int_base = 1340

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Feb-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Dec-2020

Platform Notes (Continued)

```
13: 31 31 31 31 21 21 31 31 31 31 21 21 11 10 21 21  
14: 31 31 31 31 31 21 21 21 21 31 31 21 21 10 11  
15: 31 31 31 31 31 21 21 21 21 31 31 21 21 11 10
```

From /proc/meminfo

```
MemTotal: 3168351848 kB  
HugePages_Total: 0  
Hugepagesize: 2048 kB
```

/sbin/tuned-adm active
Current active profile: throughput-performance

/sys/devices/system/cpu/cpu*/cpufreq/scaling_governor has
performance

From /etc/*release* /etc/*version*
os-release:

```
NAME="Red Hat Enterprise Linux"  
VERSION="8.3 (Ootpa)"  
ID="rhel"  
ID_LIKE="fedora"  
VERSION_ID="8.3"  
PLATFORM_ID="platform:el8"  
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"  
ANSI_COLOR="0;31"  
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)  
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)  
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):

KVM: Mitigation: Split huge pages

CVE-2018-3620 (L1 Terminal Fault):

Not affected

Microarchitectural Data Sampling:

Not affected

CVE-2017-5754 (Meltdown):

Not affected

CVE-2018-3639 (Speculative Store Bypass):

Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp

CVE-2017-5753 (Spectre variant 1):

Mitigation: usercopy/swaps
barriers and __user pointer
sanitization

CVE-2017-5715 (Spectre variant 2):

Mitigation: Enhanced IBRS, IBPB:
conditional, RSB filling

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Feb-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Dec-2020

Platform Notes (Continued)

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Mitigation: TSX disabled

run-level 3 Feb 11 20:22

SPEC is set to: /home/spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb1	ext4	2.0T	6.1G	1.9T	1%	/home/spec

From /sys/devices/virtual/dmi/id

Vendor:	xFusion
Product:	9008 V5
Product Family:	Purley
Serial:	123456

Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

38x Hynix HMA84GR7CJR4N-WM	32 GB	2 rank	2933
3x Hynix HMA84GR7JJR4N-WM	32 GB	2 rank	2933
55x Samsung M393A4K40CB2-CVF	32 GB	2 rank	2933

BIOS:

BIOS Vendor:	INSYDE Corp.
BIOS Version:	8.18
BIOS Date:	09/06/2021
BIOS Revision:	8.18

(End of data from sysinfo program)

Compiler Version Notes

=====

C	500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base)
	525.x264_r(base) 557.xz_r(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====

C++	520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base)
	541.leela_r(base)

=====

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: Feb-2022

Test Sponsor: xFusion

Hardware Availability: Apr-2019

Tested by: xFusion

Software Availability: Dec-2020

Compiler Version Notes (Continued)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base)

=====
Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion KunLun 9008 V5 (Intel Xeon Platinum 8280)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

Test Date: Feb-2022

Hardware Availability: Apr-2019

Software Availability: Dec-2020

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-fsto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fsto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div  
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte  
-auto -mbranches-within-32B-boundaries  
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml
<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CSL-V1.1.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.8 on 2022-02-11 07:34:02-0500.

Report generated on 2022-03-02 16:34:09 by CPU2017 PDF formatter v6442.

Originally published on 2022-03-01.