



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.1

xFusion 2488H V6 (Intel Xeon Gold 6348H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488


Test Date: May-2022

Test Sponsor: xFusion

Hardware Availability: Jun-2020

Tested by: xFusion

Software Availability: Sep-2021

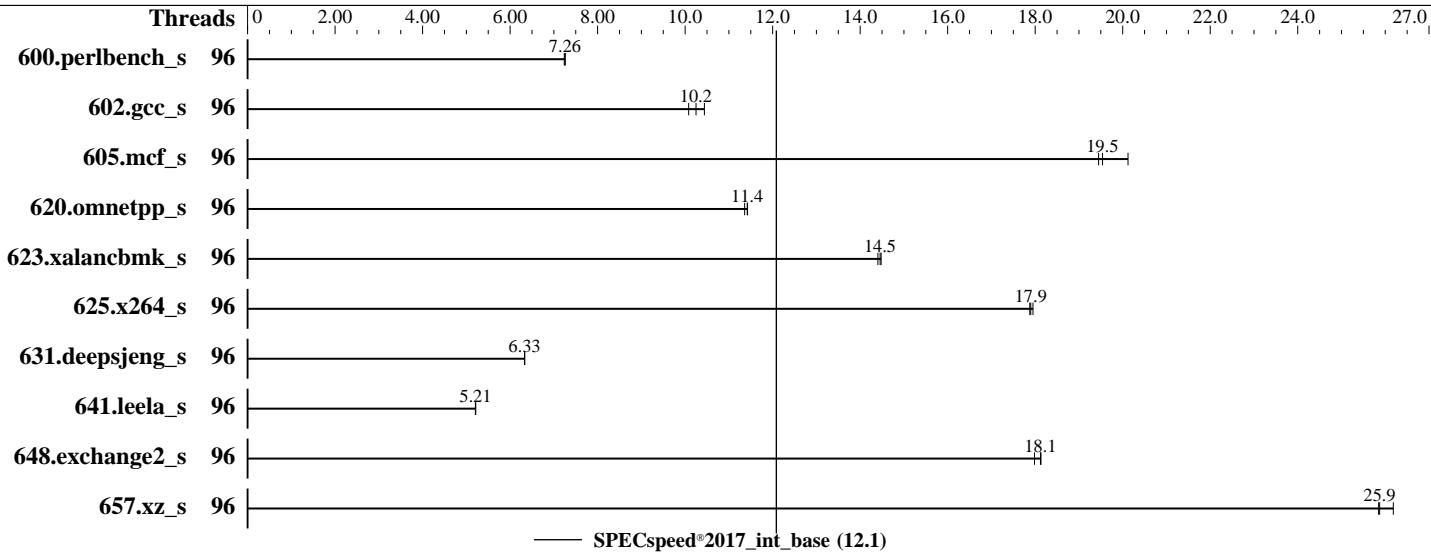

Hardware

CPU Name: Intel Xeon Gold 6348H
Max MHz: 4200
Nominal: 2300
Enabled: 96 cores, 4 chips
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 1536 GB (48 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)
Storage: 1 x 960 GB SATA SSD
Other: None

Software

OS: Red Hat Enterprise Linux release 8.3 (Ootpa) 4.18.0-240.el8.x86_64
Compiler: C/C++: Version 2021.4.0 of Intel oneAPI DPC++/C++ Compiler Build 20210924 for Linux;
Fortran: Version 2021.4.0 of Intel Fortran Compiler Classic Build 20210910 for Linux
Parallel: Yes
Firmware: Version 0.81 Released Feb-2022
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: jemalloc memory allocator V5.0.1
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.1

xFusion 2488H V6 (Intel Xeon Gold 6348H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: May-2022

Test Sponsor: xFusion

Hardware Availability: Jun-2020

Tested by: xFusion

Software Availability: Sep-2021

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|-----------------|---------|------------|-------------|-------------|-------------|-------------|-------------|---------|---------|-------|---------|-------|---------|-------|
| | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Threads | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 600.perlbench_s | 96 | 245 | 7.24 | <u>245</u> | <u>7.26</u> | 245 | 7.26 | | | | | | | |
| 602.gcc_s | 96 | 395 | 10.1 | <u>389</u> | <u>10.2</u> | 381 | 10.4 | | | | | | | |
| 605.mcf_s | 96 | 243 | 19.4 | 235 | 20.1 | <u>242</u> | <u>19.5</u> | | | | | | | |
| 620.omnetpp_s | 96 | 143 | 11.4 | <u>143</u> | <u>11.4</u> | 144 | 11.4 | | | | | | | |
| 623.xalancbmk_s | 96 | 98.4 | 14.4 | <u>98.0</u> | <u>14.5</u> | 97.9 | 14.5 | | | | | | | |
| 625.x264_s | 96 | 98.7 | 17.9 | 98.3 | 17.9 | <u>98.6</u> | <u>17.9</u> | | | | | | | |
| 631.deepsjeng_s | 96 | <u>226</u> | <u>6.33</u> | 226 | 6.33 | 226 | 6.33 | | | | | | | |
| 641.leela_s | 96 | 327 | 5.21 | 328 | 5.21 | <u>327</u> | <u>5.21</u> | | | | | | | |
| 648.exchange2_s | 96 | 163 | 18.0 | 162 | 18.1 | <u>162</u> | <u>18.1</u> | | | | | | | |
| 657.xz_s | 96 | 236 | 26.2 | 239 | 25.8 | <u>239</u> | <u>25.9</u> | | | | | | | |

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec20214/lib/intel64:/spec20214/je5.0.1-64"

MALLOC_CONF = "retain:true"

OMP_STACKSIZE = "192M"

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.3

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.1

xFusion 2488H V6 (Intel Xeon Gold 6348H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: May-2022

Test Sponsor: xFusion

Hardware Availability: Jun-2020

Tested by: xFusion

Software Availability: Sep-2021

General Notes (Continued)

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

BIOS configuration:

Performance Profile Set to Load Balance

Hyper-Threading Set to Disabled

Sysinfo program /spec20214/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on localhost.localdomain Tue May 24 01:54:39 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Gold 6348H CPU @ 2.30GHz
        4 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 24
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture:          x86_64
CPU op-mode(s):       32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                96
On-line CPU(s) list:  0-95
Thread(s) per core:   1
Core(s) per socket:   24
Socket(s):             4
NUMA node(s):          4
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Gold 6348H CPU @ 2.30GHz
Stepping:               11
CPU MHz:                1732.554
CPU max MHz:           4200.0000
```

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2488H V6 (Intel Xeon Gold 6348H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = Not Run

Test Date: May-2022

Hardware Availability: Jun-2020

Software Availability: Sep-2021

Platform Notes (Continued)

CPU min MHz: 1000.0000

BogoMIPS: 4600.00

Virtualization: VT-x

L1d cache: 32K

L1i cache: 32K

L2 cache: 1024K

L3 cache: 33792K

NUMA node0 CPU(s): 0-23

NUMA node1 CPU(s): 24-47

NUMA node2 CPU(s): 48-71

NUMA node3 CPU(s): 72-95

Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperf mperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cdp_l3 invpcid_single ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid cqmq mpx rdt_a avx512f avx512dq rdseed adx smap clflushopt clwb intel_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbmb_total cqmq_mbmb_local avx512_bf16 dtherm ida arat pln pts pku ospke avx512_vnni md_clear flush_l1d arch_capabilities

/proc/cpuinfo cache data
cache size : 33792 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23
node 0 size: 375268 MB
node 0 free: 384886 MB
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47
node 1 size: 376912 MB
node 1 free: 386771 MB
node 2 cpus: 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71
node 2 size: 377508 MB
node 2 free: 386490 MB
node 3 cpus: 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95
node 3 size: 377067 MB
node 3 free: 386374 MB
node distances:
node 0 1 2 3
0: 10 20 20 20
1: 20 10 20 20
2: 20 20 10 20

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.1

xFusion 2488H V6 (Intel Xeon Gold 6348H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: May-2022

Test Sponsor: xFusion

Hardware Availability: Jun-2020

Tested by: xFusion

Software Availability: Sep-2021

Platform Notes (Continued)

3: 20 20 20 10

From /proc/meminfo

```
MemTotal:      1583437100 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

From /etc/*release* /etc/*version*

```
os-release:
  NAME="Red Hat Enterprise Linux"
  VERSION="8.3 (Ootpa)"
  ID="rhel"
  ID_LIKE="fedora"
  VERSION_ID="8.3"
  PLATFORM_ID="platform:el8"
  PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
  ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga
```

uname -a:

```
Linux localhost.localdomain 4.18.0-240.el8.x86_64 #1 SMP Wed Sep 23 05:13:10 EDT 2020
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

| | |
|---|---|
| itlb_multihit: | Not affected |
| CVE-2018-3620 (L1 Terminal Fault): | Not affected |
| Microarchitectural Data Sampling: | Not affected |
| CVE-2017-5754 (Meltdown): | Not affected |
| CVE-2018-3639 (Speculative Store Bypass): | Mitigation: Speculative Store Bypass disabled via prctl and seccomp |
| CVE-2017-5753 (Spectre variant 1): | Mitigation: usercopy/swaps barriers and __user pointer sanitization |
| CVE-2017-5715 (Spectre variant 2): | Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling |
| srbds: | Not affected |
| tsx_async_abort: | Not affected |

run-level 3 May 24 01:53

SPEC is set to: /spec20214

| Filesystem | Type | Size | Used | Avail | Use% | Mounted on |
|-----------------------|------|------|------|-------|------|------------|
| /dev/mapper/rhel-root | xfs | 270G | 111G | 160G | 41% | / |

From /sys/devices/virtual/dmi/id

(Continued on next page)



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2488H V6 (Intel Xeon Gold 6348H)

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = Not Run

Test Date: May-2022

Hardware Availability: Jun-2020

Software Availability: Sep-2021

Platform Notes (Continued)

BIOS: ByoSoft 0.81 02/10/2022

Vendor: XFUSION

Product: 2488H V6

Product Family: Cedar Island

Serial: 123456

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

48x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200

(End of data from sysinfo program)

This system support 12 DIMMs per processor, total 48 DIMMs.

48 DIMM slots installed with 32 GB DIMM for this run,
and running at 2933 due to CPU limitation.

Compiler Version Notes

=====

C | 600.perlbench_s(base) 602.gcc_s(base) 605.mcf_s(base)
| 625.x264_s(base) 657.xz_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

C++ | 620.omnetpp_s(base) 623.xalancbmk_s(base) 631.deepsjeng_s(base)
| 641.leela_s(base)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,
Version 2021.4.0 Build 20210924
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.

=====

Fortran | 648.exchange2_s(base)

=====

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on
Intel(R) 64, Version 2021.4.0 Build 20210910_000000
Copyright (C) 1985-2021 Intel Corporation. All rights reserved.



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

xFusion 2488H V6 (Intel Xeon Gold 6348H)

SPECspeed®2017_int_base = 12.1

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Sponsor: xFusion

Tested by: xFusion

Test Date: May-2022

Hardware Availability: Jun-2020

Software Availability: Sep-2021

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

600.perlbench_s: -DSPEC_LP64 -DSPEC_LINUX_X64
602.gcc_s: -DSPEC_LP64
605.mcf_s: -DSPEC_LP64
620.omnetpp_s: -DSPEC_LP64
623.xalancbmk_s: -DSPEC_LP64 -DSPEC_LINUX
625.x264_s: -DSPEC_LP64
631.deepsjeng_s: -DSPEC_LP64
641.leela_s: -DSPEC_LP64
648.exchange2_s: -DSPEC_LP64
657.xz_s: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-DSPEC_OPENMP -std=c11 -m64 -fopenmp -Wl,-z,muldefs -xCORE-AVX512
-O3 -ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -mbranches-within-32B-boundaries
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

C++ benchmarks:

-DSPEC_OPENMP -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/intel/compiler/2021.4.0/linux/compiler/lib/intel64_lin/
-lqkalloc

Fortran benchmarks:

-m64 -xCORE-AVX512 -O3 -ipo -no-prec-div -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-mbranches-within-32B-boundaries



SPEC CPU®2017 Integer Speed Result

Copyright 2017-2022 Standard Performance Evaluation Corporation

xFusion

SPECspeed®2017_int_base = 12.1

xFusion 2488H V6 (Intel Xeon Gold 6348H)

SPECspeed®2017_int_peak = Not Run

CPU2017 License: 6488

Test Date: May-2022

Test Sponsor: xFusion

Hardware Availability: Jun-2020

Tested by: xFusion

Software Availability: Sep-2021

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-CPX-V1.1.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.0 on 2022-05-23 13:54:38-0400.

Report generated on 2022-06-07 15:48:44 by CPU2017 PDF formatter v6442.

Originally published on 2022-06-07.