



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

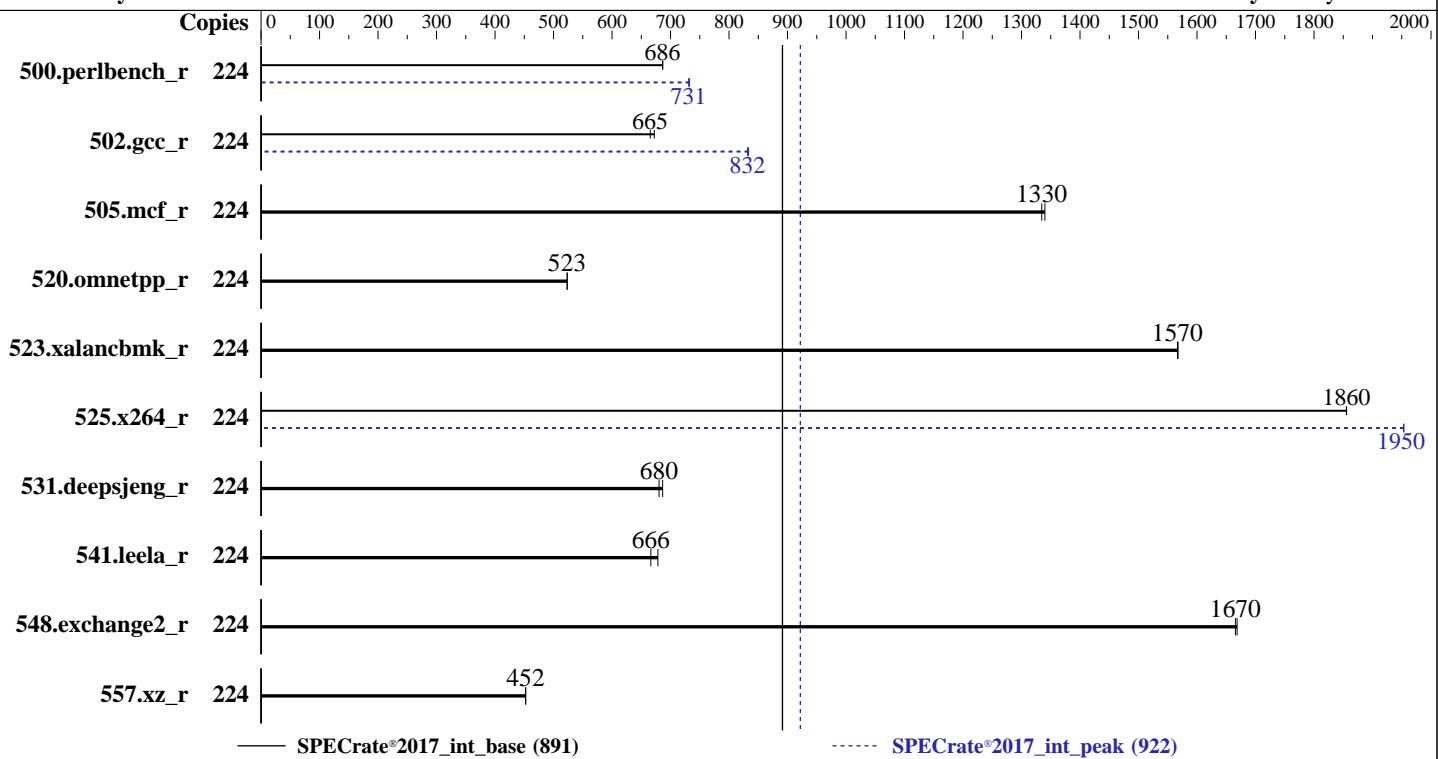

## Hardware

CPU Name: Intel Xeon Platinum 8480+  
 Max MHz: 3800  
 Nominal: 2000  
 Enabled: 112 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 105 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 125 GB on tmpfs  
 Other: None

## Software

OS: Red Hat Enterprise Linux 8.6 (Ootpa)  
 Compiler: 4.18.0-372.9.1.el8.x86\_64  
 C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 0.3.1 released Nov-2022  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	519	687	<b>519</b>	<b>686</b>			224	<b>488</b>	<b>731</b>	487	733				
502.gcc_r	224	472	672	<b>477</b>	<b>665</b>			224	<b>381</b>	<b>832</b>	381	833				
505.mcf_r	224	<b>271</b>	<b>1330</b>	270	1340			224	<b>271</b>	<b>1330</b>	270	1340				
520.omnetpp_r	224	<b>562</b>	<b>523</b>	561	523			224	<b>562</b>	<b>523</b>	561	523				
523.xalancbmk_r	224	151	1570	<b>151</b>	<b>1570</b>			224	151	1570	<b>151</b>	<b>1570</b>				
525.x264_r	224	211	1860	<b>211</b>	<b>1860</b>			224	201	1950	<b>201</b>	<b>1950</b>				
531.deepsjeng_r	224	<b>377</b>	<b>680</b>	374	687			224	<b>377</b>	<b>680</b>	374	687				
541.leela_r	224	<b>557</b>	<b>666</b>	547	678			224	<b>557</b>	<b>666</b>	547	678				
548.exchange2_r	224	<b>352</b>	<b>1670</b>	352	1670			224	<b>352</b>	<b>1670</b>	352	1670				
557.xz_r	224	<b>535</b>	<b>452</b>	535	452			224	<b>535</b>	<b>452</b>	535	452				

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2022.1/lib/ia32:/mnt/ram
  disk/cpu2017-1.1.9-ic2022.1/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or https://github.com/jemalloc/jemalloc/releases

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
        ADDDC Setting : Disabled
        DIMM Self Healing on
        Uncorrectable Memory Error : Disabled
        Virtualization Technology : Disabled
            Sub NUMA Cluster : 4-way Clustering
        DCU Streamer Prefetcher : Disabled
            LLC Prefetch : Disabled
        Dead Line LLC Alloc : Disabled
            Optimizer Mode : Enabled

        System Profile : Custom
        CPU Power Management : Maximum Performance
            C1E : Disabled
            C States : Autonomous
        Memory Patrol Scrub : Disabled
        Energy Efficiency Policy : Performance
            PCI ASPM L1 Link
            Power Management : Disabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2022.1/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sat Dec 17 10:57:35 2022

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

## Platform Notes (Continued)

```
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 239 (239-58.el8)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
22. Disk information
23. /sys/devices/virtual/dmi/id
24. dmidecode
25. BIOS
-----
-----
1. uname -a
Linux localhost.localdomain 4.18.0-372.9.1.el8.x86_64 #1 SMP Fri Apr 15 22:12:19 EDT 2022 x86_64 x86_64
x86_64 GNU/Linux
-----
2. w
10:57:36 up 2:42, 1 user, load average: 0.27, 0.08, 0.02
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root ttys1 - 10:56 40.00s 1.29s 0.00s /bin/bash ./dell-norun-specrate.sh
--iterations 2 --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
-----
3. Username
From environment variable $USER: root
-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals           (-i) 4126004
max locked memory         (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority        (-r) 0
stack size                (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4126004
virtual memory             (-v) unlimited
file locks                  (-x) unlimited
-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Platform Notes (Continued)

```
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-main.sh rate
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
/bin/bash ./dell-norun-specrate.sh --iterations 2 --output_format csv,html,pdf,txt --define
  Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak -o all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
  ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --iterations 2
  --output_format csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_Xeon-4.inc --nopower --runmode rate
  --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2022.1
```

```
-----
6. /proc/cpuinfo
  model name      : Intel(R) Xeon(R) Platinum 8480+
  vendor_id       : GenuineIntel
  cpu family     : 6
  model          : 143
  stepping        : 6
  microcode       : 0xb0000111
  bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs
  cpu cores      : 56
  siblings        : 112
  2 physical ids (chips)
  224 processors (hardware threads)
  physical id 0: core ids 0-55
  physical id 1: core ids 0-55
  physical id 0: apicids 0-111
  physical id 1: apicids 128-239
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu
```

```
From lscpu from util-linux 2.32.1:
  Architecture:           x86_64
  CPU op-mode(s):         32-bit, 64-bit
  Byte Order:             Little Endian
  CPU(s):                224
  On-line CPU(s) list:   0-223
  Thread(s) per core:    2
  Core(s) per socket:    56
  Socket(s):             2
  NUMA node(s):          8
  Vendor ID:              GenuineIntel
  BIOS Vendor ID:        Intel
  CPU family:             6
  Model:                 143
  Model name:             Intel(R) Xeon(R) Platinum 8480+
  BIOS Model name:        Intel(R) Xeon(R) Platinum 8480+
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

## Platform Notes (Continued)

```

Stepping: 6
CPU MHz: 2000.000
BogoMIPS: 4000.00
L1d cache: 48K
L1i cache: 32K
L2 cache: 2048K
L3 cache: 107520K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,112,116,120,124,128,132,136,140,144,148,152,156
,160,164
NUMA node1 CPU(s): 56,60,64,68,72,76,80,84,88,92,96,100,104,108,168,172,176,180,184,188,192,196,200,204,2
08,212,216,220
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,114,118,122,126,130,134,138,142,146,150,154,15
8,162,166
NUMA node3 CPU(s): 58,62,66,70,74,78,82,86,90,94,98,102,106,110,170,174,178,182,186,190,194,198,202,206,2
10,214,218,222
NUMA node4 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,113,117,121,125,129,133,137,141,145,149,153,157
,161,165
NUMA node5 CPU(s): 57,61,65,69,73,77,81,85,89,93,97,101,105,109,169,173,177,181,185,189,193,197,201,205,2
09,213,217,221
NUMA node6 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,115,119,123,127,131,135,139,143,147,151,155,15
9,163,167
NUMA node7 CPU(s): 59,63,67,71,75,79,83,87,91,95,99,103,107,111,171,175,179,183,187,191,195,199,203,207,2
11,215,219,223
Flags:
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtTopology nonstop_tsc cpuid aperfmpfperf
tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl smx est tm2 ssse3 sdbg fma cx16
xptr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx
f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13
invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqmm rdta avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512v1 xsaveopt xsavedec xgetbv1
xsaves cqmm_llc cqmm_occup_llc cqmm_mbm_total cqmm_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopsrndq la57
rdpid bus_lock_detect cldemote movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
-----
```

### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0,4,8,12,16,20,24,28,32,36,40,44,48,52,112,116,120,124,128,132,136,140,144,148,152,156,160,164
node 0 size: 128469 MB
node 0 free: 127719 MB
node 1 cpus:
56,60,64,68,72,76,80,84,88,92,96,100,104,108,168,172,176,180,184,188,192,196,200,204,208,212,216,220
node 1 size: 128976 MB
node 1 free: 128753 MB
node 2 cpus:
2,6,10,14,18,22,26,30,34,38,42,46,50,54,114,118,122,126,130,134,138,142,146,150,154,158,162,166
node 2 size: 129017 MB
node 2 free: 128523 MB
node 3 cpus:
58,62,66,70,74,78,82,86,90,94,98,102,106,110,170,174,178,182,186,190,194,198,202,206,210,214,218,222
node 3 size: 129017 MB
node 3 free: 127638 MB
node 4 cpus: 1,5,9,13,17,21,25,29,33,37,41,45,49,53,113,117,121,125,129,133,137,141,145,149,153,157,161,165
node 4 size: 129017 MB
node 4 free: 127367 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

CPU2017 License: 6573

Test Date: Dec-2022

Test Sponsor: Dell Inc.

Hardware Availability: Feb-2023

Tested by: Dell Inc.

Software Availability: May-2022

## Platform Notes (Continued)

```
node 5 cpus:  
57,61,65,69,73,77,81,85,89,93,97,101,105,109,169,173,177,181,185,189,193,197,201,205,209,213,217,221  
node 5 size: 129017 MB  
node 5 free: 128461 MB  
node 6 cpus:  
3,7,11,15,19,23,27,31,35,39,43,47,51,55,115,119,123,127,131,135,139,143,147,151,155,159,163,167  
node 6 size: 129017 MB  
node 6 free: 125140 MB  
node 7 cpus:  
59,63,67,71,75,79,83,87,91,95,99,103,107,111,171,175,179,183,187,191,195,199,203,207,211,215,219,223  
node 7 size: 129005 MB  
node 7 free: 127985 MB  
node distances:  
node 0 1 2 3 4 5 6 7  
0: 10 12 12 12 21 21 21 21  
1: 12 10 12 12 21 21 21 21  
2: 12 12 10 12 21 21 21 21  
3: 12 12 12 10 21 21 21 21  
4: 21 21 21 21 10 12 12 12  
5: 21 21 21 21 12 10 12 12  
6: 21 21 21 21 12 12 10 12  
7: 21 21 21 21 12 12 12 10  
  
-----  
9. /proc/meminfo  
MemTotal: 1056297432 kB  
  
-----  
10. who -r  
run-level 3 Dec 17 08:15  
  
-----  
11. Systemd service manager version: systemd 239 (239-58.el8)  
Default Target Status  
multi-user degraded  
  
-----  
12. Failed units, from systemctl list-units --state=failed  
UNIT LOAD ACTIVE SUB DESCRIPTION  
* dnf-makecache.service loaded failed dnf makecache  
  
-----  
13. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ crond firewalld getty@ import-state insights-client-boot irqbalance iscsi iscsi-onboot kdump libstoragemgmt loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname nvmefc-boot-connections rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog timedate tuned udisks2 vdo  
disabled arp-ethers blk-availability chrony-cni-dhcp console-getty cpupower debug-shell ebttables hwloc-dump-hwdata iprdump iprinit ipruleupdate ipsec iscsid iscsiuio kpatch kvm_stat ledmon man-db-restart-cache-update nftables nvmf-autoconnect oddjobd podman podman-auto-update podman-restart psacct rdisc rhcd rhsm rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcsc  
indirect sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo  
masked systemd-timedated  
  
-----  
14. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT_IMAGE=(hd2,gpt2)/vmlinuz-4.18.0-372.9.1.el8.x86_64  
root=/dev/mapper/rhel-root
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Platform Notes (Continued)

```
ro
resume=/dev/mapper/rhel-swap
rd.lvm.lv=rhel/root
rd.lvm.lv=rhel/swap
rhgb
quiet

-----
15. cpupower frequency-info
analyzing CPU 0:
  Unable to determine current policy
  boost state support:
    Supported: yes
    Active: yes

-----
16. tuned-adm active
  Current active profile: throughput-performance

-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       2
vm.compaction_proactiveness    0
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                  0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 40
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                 0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   10
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            0

-----
18. /sys/kernel/mm/transparent_hugepage
defrag           always defer defer+madvise [madvise] never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force

-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag             1
max_ptes_none      511
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000

-----
20. OS release
  From /etc/*-release /etc/*-version
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Platform Notes (Continued)

```
os-release      Red Hat Enterprise Linux 8.6 (Ootpa)
redhat-release Red Hat Enterprise Linux release 8.6 (Ootpa)
system-release Red Hat Enterprise Linux release 8.6 (Ootpa)
```

```
-----  
21. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities  
    itlb_multihit      Not affected  
    l1tf                Not affected  
    mds                 Not affected  
    meltdown           Not affected  
    spec_store_bypass  Mitigation: Speculative Store Bypass disabled via prctl and seccomp  
    spectre_v1          Mitigation: usercopy/swapgs barriers and __user pointer sanitization  
    spectre_v2          Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
    srbds               Not affected  
    tsx_async_abort     Not affected
```

For more information, see the Linux documentation on hardware vulnerabilities, for example  
<https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

```
-----  
22. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2022.1  
Filesystem      Type   Size  Used Avail Use% Mounted on  
tmpfs          tmpfs   125G  3.7G  122G   3% /mnt/ramdisk
```

```
-----  
23. /sys/devices/virtual/dmi/id  
Vendor:        Dell Inc.  
Product:       PowerEdge MX760c  
Product Family: PowerEdge  
Serial:        SL6M701
```

```
-----  
24. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
12x 002C00B3002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800  
1x 002C0632002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800  
3x 002C069D002C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
```

```
-----  
25. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:    Dell Inc.  
BIOS Version:   0.3.1  
BIOS Date:      11/24/2022  
BIOS Revision:  0.3
```

## Compiler Version Notes

```
=====  
C | 502.gcc_r(peak)
```

```
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Compiler Version Notes (Continued)

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C      | 502.gcc_r(peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C      | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
      | 557.xz_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
C++     | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
      | 541.leela_r(base, peak)
```

```
=====
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====
Fortran | 548.exchange2_r(base, peak)
```

```
=====
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -DSPEC_LP64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc  
  
502.gcc\_r: -m32  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32\_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc

505.mcf\_r: basepeak = yes

525.x264\_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

557.xz\_r: basepeak = yes

C++ benchmarks:

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge MX760c (Intel Xeon Platinum 8480+)

SPECrate®2017\_int\_base = 891

SPECrate®2017\_int\_peak = 922

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2022

Hardware Availability: Feb-2023

Software Availability: May-2022

## Peak Optimization Flags (Continued)

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64-revB.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2022-12-17 11:57:35-0500.

Report generated on 2024-01-29 17:18:20 by CPU2017 PDF formatter v6716.

Originally published on 2023-01-17.