



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECSpeed®2017\_fp\_base = 273**

**SPECSpeed®2017\_fp\_peak = 273**

CPU2017 License: 3


**Test Date:** Jan-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** May-2022

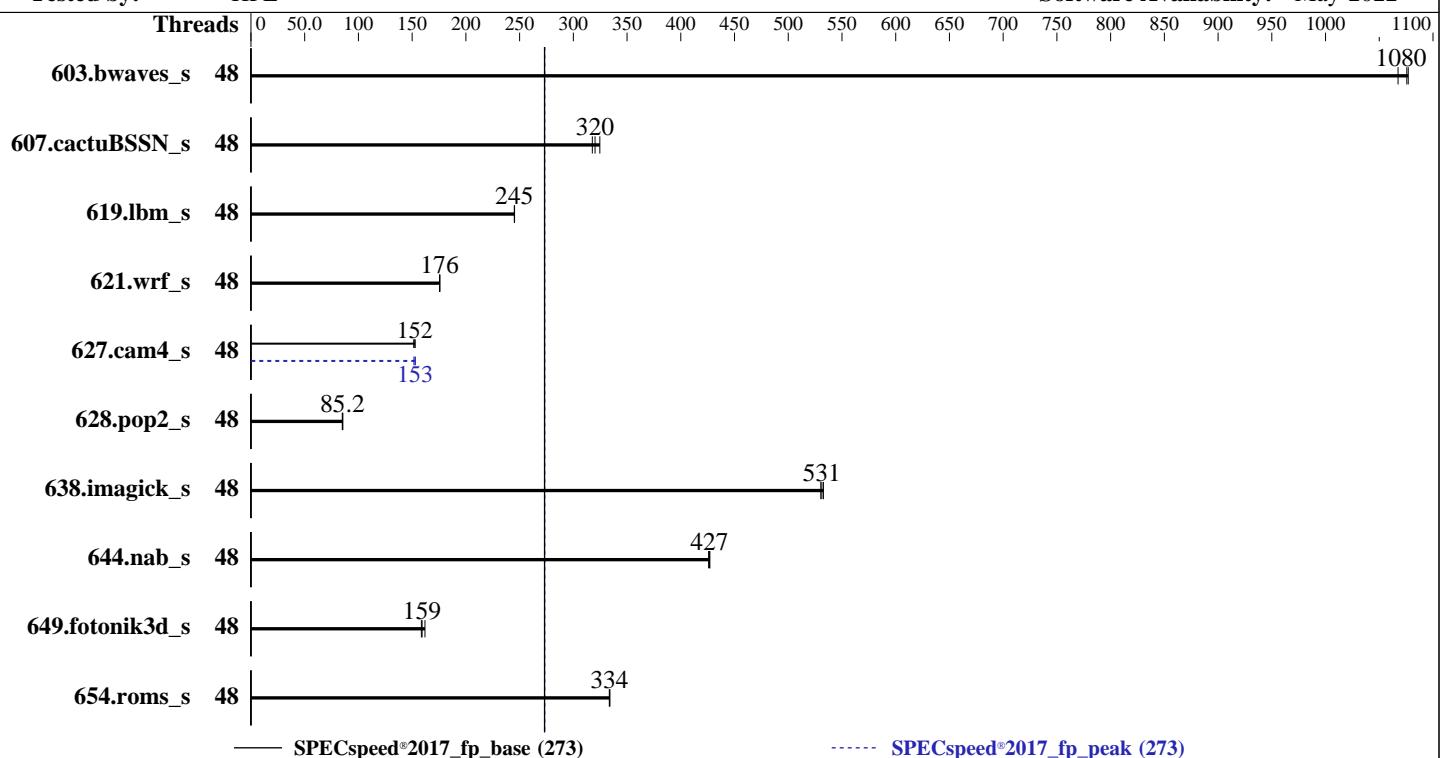

— SPECSpeed®2017\_fp\_base (273)

----- SPECSpeed®2017\_fp\_peak (273)

## Hardware

CPU Name: Intel Xeon Gold 6418H  
 Max MHz: 4000  
 Nominal: 2100  
 Enabled: 48 cores, 2 chips  
 Orderable: 1, 2 chip (s)  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 60 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

## Software

OS: Red Hat Enterprise Linux 9.0 (Plow)  
 Compiler: Kernel 5.14.0-70.13.1.el9\_0.x86\_64  
 C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;  
 Parallel: Yes  
 Firmware: HPE BIOS Version v1.20 12/16/2022 released Dec-2022  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Date: Jan-2023

Test Sponsor: HPE

Hardware Availability: Jan-2023

Tested by: HPE

Software Availability: May-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	48	55.3	1070	54.8	1080	<b>54.9</b>	<b>1080</b>	48	55.3	1070	54.8	1080	<b>54.9</b>	<b>1080</b>
607.cactuBSSN_s	48	<b>52.1</b>	<b>320</b>	52.5	318	51.3	325	48	<b>52.1</b>	<b>320</b>	52.5	318	<b>51.3</b>	<b>325</b>
619.lbm_s	48	21.4	245	<b>21.4</b>	<b>245</b>	21.4	245	48	21.4	245	<b>21.4</b>	<b>245</b>	21.4	245
621.wrf_s	48	<b>75.3</b>	<b>176</b>	75.2	176	75.4	175	48	<b>75.3</b>	<b>176</b>	75.2	176	<b>75.4</b>	<b>175</b>
627.cam4_s	48	58.5	151	<b>58.1</b>	<b>152</b>	58.0	153	48	<b>58.0</b>	<b>153</b>	58.5	152	<b>58.0</b>	<b>153</b>
628.pop2_s	48	140	85.0	<b>139</b>	<b>85.2</b>	139	85.5	48	140	85.0	<b>139</b>	<b>85.2</b>	139	85.5
638.imagick_s	48	<b>27.2</b>	<b>531</b>	27.2	530	27.1	533	48	<b>27.2</b>	<b>531</b>	27.2	530	<b>27.1</b>	<b>533</b>
644.nab_s	48	41.0	426	40.9	427	<b>40.9</b>	<b>427</b>	48	41.0	426	40.9	427	<b>40.9</b>	<b>427</b>
649.fotonik3d_s	48	<b>57.2</b>	<b>159</b>	57.5	159	56.3	162	48	<b>57.2</b>	<b>159</b>	57.5	159	<b>56.3</b>	<b>162</b>
654.roms_s	48	<b>47.2</b>	<b>334</b>	47.2	334	47.1	334	48	<b>47.2</b>	<b>334</b>	47.2	334	<b>47.1</b>	<b>334</b>

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

IRQ balance service was stopped using "systemctl stop irqbalance.service"

tuned-adm profile was set to Throughput-Performance using "tuned-adm profile throughput-performance"

perf-bias for all the CPUs is set using "cpupower set -b 0"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/je5.0.1-64"

MALLOC\_CONF = "retain:true"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Redhat Enterprise Linux 8.0

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Gold 6418H processor.

BIOS Configuration:

Workload Profile set to General Peak Frequency Compute

Thermal Configuration set to Maximum Cooling

Intel Hyper-Threading set to Disabled

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Prefetch set to Enabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Enhanced Processor Performance Profile set to Aggressive

Dead Block Predictor set to Enabled

Workload Profile set to Custom

Intel DMI Link Frequency set to Gen2 Speed

Adjacent Sector Prefetch set to Disabled

Minimum Processor Idle Power Package C-State set to No Package State

Sysinfo program /home/cpu2017/bin/sysinfo

Rev: r6622 of 2021-04-07 982a61ec0915b55891ef0e16acafcc64d

running on localhost.localdomain Thu Apr 7 05:45:33 2022

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6418H

2 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

From lscpu from util-linux 2.37.4:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Address sizes: 46 bits physical, 57 bits virtual
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Gold 6418H
BIOS Model name: Intel(R) Xeon(R) Gold 6418H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 2
Stepping: 7
BogoMIPS: 4200.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr
pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx
pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor ds_cpl vmx
smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt
tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault
epb cat_13 cat_12 cdp_13 invpcid_single cdp_12 ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local split_lock_detect avx_vnni
avx512_bf16 wbnoinvd dtherm ida arat pln pts avx512vbmi umip pku ospke waitpkg
avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq
la57 rdpid bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxlldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization: VT-x
L1d cache: 2.3 MiB (48 instances)
L1i cache: 1.5 MiB (48 instances)
L2 cache: 96 MiB (48 instances)
L3 cache: 120 MiB (2 instances)
NUMA node(s): 2
NUMA node0 CPU(s): 0-11,24-35
NUMA node1 CPU(s): 12-23,36-47
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

**Test Date:** Jan-2023

Test Sponsor: HPE

**Hardware Availability:** Jan-2023

Tested by: HPE

**Software Availability:** May-2022

## Platform Notes (Continued)

```
prctl
Vulnerability Spectre v1: Mitigation: usercopy/swaps barriers and __user
pointer sanitization
Vulnerability Spectre v2: Mitigation: Enhanced IBRS, IBPB conditional, RSB
filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	2.3M	12	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	2M	96M	16	Unified	2	2048	1	64
L3	60M	120M	15	Unified	3	65536	1	64

```
/proc/cpuinfo cache data
cache size : 61440 KB
```

From numactl --hardware

WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 24 25 26 27 28 29 30 31 32 33 34 35

node 0 size: 515803 MB

node 0 free: 514936 MB

node 1 cpus: 12 13 14 15 16 17 18 19 20 21 22 23 36 37 38 39 40 41 42 43 44 45 46 47

node 1 size: 516043 MB

node 1 free: 514913 MB

node distances:

node 0 1

0: 10 20

1: 20 10

From /proc/meminfo

MemTotal: 1056611288 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/sbin/tuned-adm active

Current active profile: throughput-performance

From /etc/\*release\* /etc/\*version\*

os-release:

NAME="Red Hat Enterprise Linux"

VERSION="9.0 (Plow)"

ID="rhel"

ID\_LIKE="fedora"

VERSION\_ID="9.0"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

```
PLATFORM_ID="platform:e19"
PRETTY_NAME="Red Hat Enterprise Linux 9.0 (Plow)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release: Red Hat Enterprise Linux release 9.0 (Plow)
system-release-cpe: cpe:/o:redhat:enterprise_linux:9::baseos

uname -a:
Linux localhost.localdomain 5.14.0-70.13.1.e19_0.x86_64 #1 SMP PREEMPT Thu Apr 14
12:42:38 EDT 2022 x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):	Not affected
CVE-2018-3620 (L1 Terminal Fault):	Not affected
Microarchitectural Data Sampling:	Not affected
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl
CVE-2017-5753 (Spectre variant 1):	Mitigation: usercopy/swaps barriers and __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling
CVE-2020-0543 (Special Register Buffer Data Sampling):	Not affected
CVE-2019-11135 (TSX Asynchronous Abort):	Not affected

run-level 3 Apr 7 05:30

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-home	xfs	819G	25G	794G	4%	/home

From /sys/devices/virtual/dmi/id

Vendor:	HPE
Product:	ProLiant DL360 Gen11
Product Family:	ProLiant
Serial:	CNX20800PZ

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

BIOS:

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Platform Notes (Continued)

BIOS Vendor: HPE  
BIOS Version: 1.20  
BIOS Date: 12/16/2022  
BIOS Revision: 1.20  
Firmware Revision: 1.10

(End of data from sysinfo program)

## Compiler Version Notes

=====

C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak)  
| 644.nab\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

=====

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

=====

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Compiler Version Notes (Continued)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version  
2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64,  
Version 2022.1.0 Build 20220316

Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Base Optimization Flags (Continued)

C benchmarks (continued):

```
-DSPEC_OPENMP -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xCORE-AVX512 -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

```
icx
```

Fortran benchmarks:

```
ifx
```

Benchmarks using both Fortran and C:

```
ifx icx
```

Benchmarks using Fortran, C, and C++:

```
icpx icx ifx
```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

627.cam4\_s: -m64 -std=c11 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -fsto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fopenmp -DSPEC\_OPENMP  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.html](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html)

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>

[http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64\\_revA.xml](http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL360 Gen11

(2.10 GHz, Intel Xeon Gold 6418H)

**SPECspeed®2017\_fp\_base = 273**

**SPECspeed®2017\_fp\_peak = 273**

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

**Test Date:** Jan-2023

**Hardware Availability:** Jan-2023

**Software Availability:** May-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.8 on 2022-04-06 20:15:32-0400.

Report generated on 2023-02-01 18:22:57 by CPU2017 PDF formatter v6442.

Originally published on 2023-02-01.