



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3


Test Date: Feb-2023

Test Sponsor: HPE

Hardware Availability: Jan-2023

Tested by: HPE

Software Availability: Feb-2023

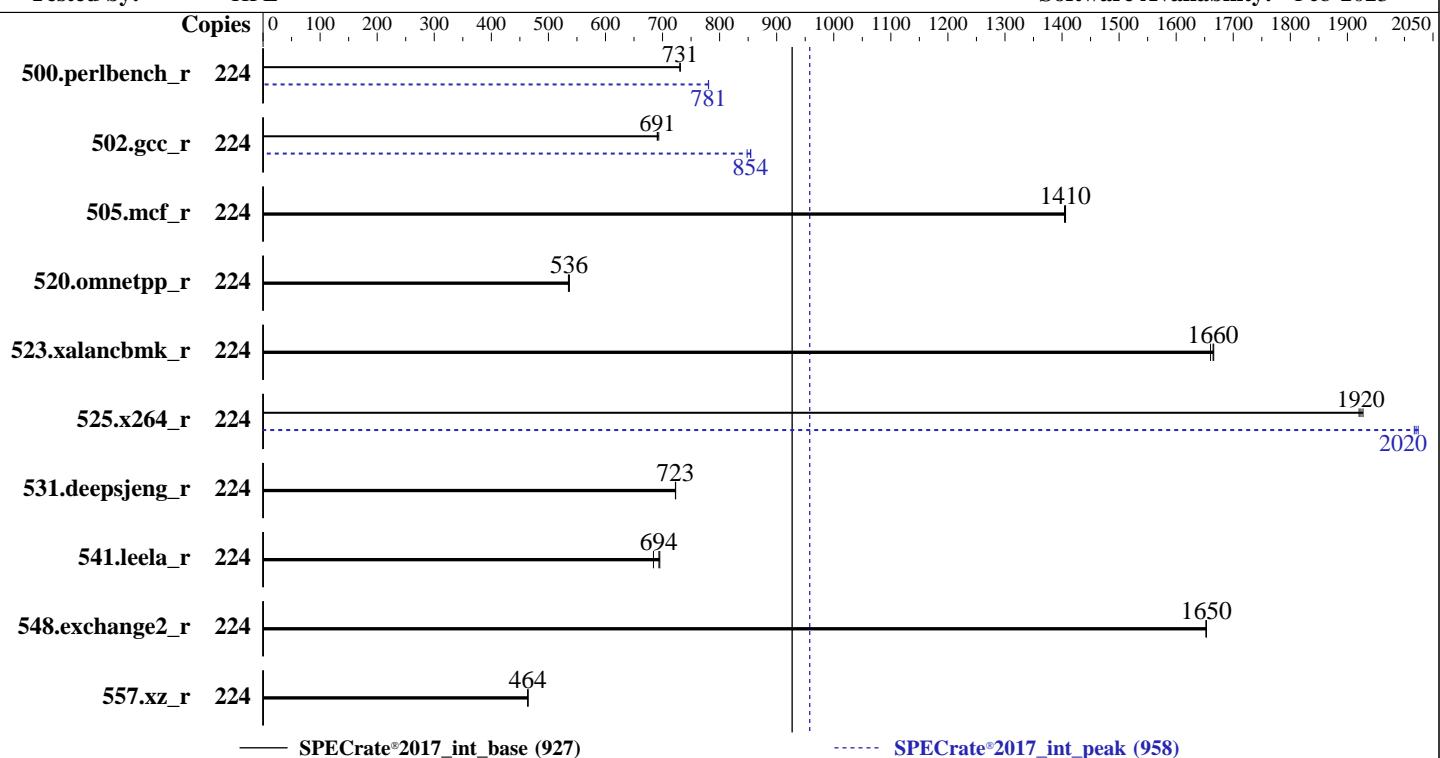

Hardware

CPU Name: Intel Xeon Platinum 8480+
 Max MHz: 3800
 Nominal: 2000
 Enabled: 112 cores, 2 chips, 2 threads/core
 Orderable: 1, 2 chip(s)
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 2 MB I+D on chip per core
 L3: 105 MB I+D on chip per chip
 Other: None
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-4800B-R)
 Storage: 1 x 2.9 TB NVMe SSD
 Other: None

Software

OS: Ubuntu 22.04.2 LTS
 Compiler: Kernel 5.15.0-60-generic
 C/C++: Version 2022.1 of Intel oneAPI DPC++/C++ Compiler for Linux;
 Fortran: Version 2022.1 of Intel Fortran Compiler for Linux;
 Parallel: No
 Firmware: HPE BIOS Version v1.22 01/18/2023 released Jan-2023
 File System: ext4
 System State: Run level 5 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Date: Feb-2023

Test Sponsor: HPE

Hardware Availability: Jan-2023

Tested by: HPE

Software Availability: Feb-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	224	488	731	488	731	488	731	224	457	781	457	780	457	781		
502.gcc_r	224	459	691	459	691	457	693	224	371	855	371	854	374	848		
505.mcf_r	224	258	1400	257	1410	257	1410	224	258	1400	257	1410	257	1410		
520.omnetpp_r	224	548	536	549	535	548	536	224	548	536	549	535	548	536		
523.xalancbmk_r	224	142	1660	142	1670	142	1660	224	142	1660	142	1670	142	1660		
525.x264_r	224	204	1930	204	1920	204	1920	224	194	2020	194	2020	194	2020		
531.deepsjeng_r	224	355	723	355	723	355	723	224	355	723	355	723	355	723		
541.leela_r	224	542	684	535	694	534	695	224	542	684	535	694	534	695		
548.exchange2_r	224	355	1650	355	1650	355	1650	224	355	1650	355	1650	355	1650		
557.xz_r	224	521	464	521	464	522	464	224	521	464	521	464	522	464		

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>
 IRQ balance service was stopped using "systemctl stop irqbalance.service"
 tuned-adm profile was set to Accelerator-Performance using "tuned-adm profile accelerator-performance"



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH = "/home/cpu2017/lib/intel64:/home/cpu2017/lib/ia32:/home/cpu2017/je5.0.1-32"  
MALLOC_CONF = "retain:true"
```

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

jemalloc, a general purpose malloc implementation built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5 sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

Platform Notes

The system ROM used for this result contains Intel microcode version 0x2b000161 for the Intel Xeon Platinum 8480+ processor.

BIOS Configuration

Workload Profile set to General Throughput Compute

Memory Patrol Scrubbing set to Disabled

Last Level Cache (LLC) Dead Line Allocation set to Disabled

Intel UPI Link Enablement set to Single Link

Enhanced Processor Performance Profile set to Aggressive

Thermal Configuration set to Maximum Cooling

Workload Profile set to Custom

Adjacent Sector Prefetch set to Disabled

DCU Stream Prefetcher set to Disabled

Intel UPI Link Power Management set to Enabled

Minimum Processor Idle Power Package C-State set to Package C6 (non-retention) State

```
Sysinfo program /home/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on admin1 Sat Feb 25 16:00:01 2023
```

SUT (System Under Test) info as seen by some common utilities.

Table of contents

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
- 12. Failed units, from systemctl list-units --state=failed
- 13. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline

15. tuned-adm active

16. sysctl

17. /sys/kernel/mm/transparent_hugepage

18. /sys/kernel/mm/transparent_hugepage/khugepaged

19. OS release

20. Disk information

21. /sys/devices/virtual/dmi/id

22. dmidecode

23. BIOS

1. uname -a
Linux admin1 5.15.0-60-generic #66-Ubuntu SMP Fri Jan 20 14:29:49 UTC 2023 x86_64 x86_64 x86_64 GNU/Linux

2. w
16:00:01 up 12 min, 2 users, load average: 1.00, 0.95, 0.60
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
admin1 tty1 - 10:24 5:35m 0.13s 0.01s -bash
admin1 pts/0 - 10:24 9.00s 0.90s 0.08s sudo -i

3. Username
From environment variable \$USER: root
From the command 'logname': admin1

4. ulimit -a
time(seconds) unlimited
file(blocks) unlimited
data(kbytes) unlimited
stack(kbytes) unlimited
coredump(blocks) 0
memory(kbytes) unlimited
locked memory(kbytes) 132070696
process 4126765
nofiles 1024
vmmemory(kbytes) unlimited
locks unlimited
rtprio 0

5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
sudo -i
sudo -i
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 -c
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=224 --configfile
ic2022.1-lin-core-avx512-rate-20220316.cfg --define smt-on --define cores=112 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --nopower
--runmode rate --tune base:peak --size refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.012/templogs/preenv.intrate.012.0.log --lognum 012.0 --from_runcpu 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017
```

```
-----  
6. /proc/cpuinfo  
    model name      : Intel(R) Xeon(R) Platinum 8480+  
    vendor_id       : GenuineIntel  
    cpu family     : 6  
    model          : 143  
    stepping       : 6  
    microcode      : 0x2b000161  
    bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrss_pbrss  
    cpu cores      : 56  
    siblings       : 112  
    2 physical ids (chips)  
    224 processors (hardware threads)  
    physical id 0: core ids 0-55  
    physical id 1: core ids 0-55  
    physical id 0: apicids 0-111  
    physical id 1: apicids 128-239
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

From lscpu from util-linux 2.37.2:

```
Architecture:                  x86_64  
CPU op-mode(s):                32-bit, 64-bit  
Address sizes:                 46 bits physical, 57 bits virtual  
Byte Order:                   Little Endian  
CPU(s):                      224  
On-line CPU(s) list:          0-223  
Vendor ID:                    GenuineIntel  
Model name:                   Intel(R) Xeon(R) Platinum 8480+  
CPU family:                   6  
Model:                        143  
Thread(s) per core:           2  
Core(s) per socket:           56  
Socket(s):                   2  
Stepping:                     6  
BogoMIPS:                     4000.00  
Flags:  
    fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
    clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
    lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology  
    nonstop_tsc cpuid aperf mperf tsc_known_freq pni pclmulqdq dtes64 monitor  
    ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1  
    sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand  
    lahf_lm abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13  
    invpcid_single cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow  
    vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmil avx2 smep bmii  
    erms invpcid cqmm_rdt_a avx512f avx512dq rdseed adx snap avx512ifma  
    clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec  
    xgetbv1 xsaves cqmm_llc cqmm_occu_llc cqmm_mbmm_total cqmm_mbmm_local  
    split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts  
    avx512vbmi umip pkru ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq  
    avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect  
    cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig  
    arch_lbr amx_bf16 avx512_fp16 amx_tile amx_int8 flush_lld  
    arch_capabilities
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Date: Feb-2023

Test Sponsor: HPE

Hardware Availability: Jan-2023

Tested by: HPE

Software Availability: Feb-2023

Platform Notes (Continued)

Virtualization:	VT-x
L1d cache:	5.3 MiB (112 instances)
L1i cache:	3.5 MiB (112 instances)
L2 cache:	224 MiB (112 instances)
L3 cache:	210 MiB (2 instances)
NUMA node(s):	8
NUMA node0 CPU(s):	0-13,112-125
NUMA node1 CPU(s):	14-27,126-139
NUMA node2 CPU(s):	28-41,140-153
NUMA node3 CPU(s):	42-55,154-167
NUMA node4 CPU(s):	56-69,168-181
NUMA node5 CPU(s):	70-83,182-195
NUMA node6 CPU(s):	84-97,196-209
NUMA node7 CPU(s):	98-111,210-223
Vulnerability Itlb multihit:	Not affected
Vulnerability Llft:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Mmio stale data:	Not affected
Vulnerability Retbleed:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW sequence
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	5.3M	12	Data	1	64	1	64
L1i	32K	3.5M	8	Instruction	1	64	1	64
L2	2M	224M	16	Unified	2	2048	1	64
L3	105M	210M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-13,112-125

node 0 size: 128728 MB

node 0 free: 127707 MB

node 1 cpus: 14-27,126-139

node 1 size: 129017 MB

node 1 free: 128570 MB

node 2 cpus: 28-41,140-153

node 2 size: 129017 MB

node 2 free: 128626 MB

node 3 cpus: 42-55,154-167

node 3 size: 128981 MB

node 3 free: 128615 MB

node 4 cpus: 56-69,168-181

node 4 size: 129017 MB

node 4 free: 128684 MB

node 5 cpus: 70-83,182-195

node 5 size: 129017 MB

node 5 free: 128645 MB

node 6 cpus: 84-97,196-209

node 6 size: 129017 MB

node 6 free: 128270 MB

node 7 cpus: 98-111,210-223

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

```
node 7 size: 129006 MB
node 7 free: 128516 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10  20  30  30  30  30  30  30
  1: 20  10  30  30  30  30  30  30
  2: 30  30  10  20  30  30  30  30
  3: 30  30  20  10  30  30  30  30
  4: 30  30  30  30  10  20  30  30
  5: 30  30  30  30  20  10  30  30
  6: 30  30  30  30  30  30  10  20
  7: 30  30  30  30  30  30  20  10

-----
9. /proc/meminfo
MemTotal:      1056565568 kB

-----
10. who -r
run-level 5 Feb 25 10:19

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
Default Target     Status
graphical          degraded

-----
12. Failed units, from systemctl list-units --state=failed
UNIT            LOAD   ACTIVE SUB     DESCRIPTION
* ipmiutil_wdt.service    loaded failed failed ipmiutil Watchdog Timer Service using cron
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

-----
13. Services, from systemctl list-unit-files
STATE           UNIT FILES
enabled         ModemManager anacron apparmor blk-availability cloud-config cloud-final cloud-init
                cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                grub-common grub-initrd-fallback ipmiutil_wdt irqbalance keyboard-setup lvm2-monitor
                lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rpcbind
                rsyslog secureboot-db setvtrgb snapd ssh systemd-networkd systemd-networkd-wait-online
                systemd-pstore systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds
                ubuntu-advantage udisks2 ufw unattended-upgrades vgaauth
enabled-runtime netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled        console-getty debug-shell ipmi_port ipmievfd ipmiutil_asy ipmiutil_evt iscsid nftables
                powertop rsync serial-getty@ systemd-boot-check-no-failures systemd-network-generator
                systemd-sysext systemd-time-wait-sync upower
generated       apport openipmi
indirect        uuidd
masked         cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                x11-common

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-5.15.0-60-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro

-----
15. tuned-adm active
Current active profile: accelerator-performance
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

```
16. sysctl
    kernel.numa_balancing          1
    kernel.randomize_va_space      2
    vm.compaction_proactiveness   20
    vm.dirty_background_bytes     0
    vm.dirty_background_ratio     10
    vm.dirty_bytes                 0
    vm.dirty_expire_centisecs    3000
    vm.dirty_ratio                 40
    vm.dirty_writeback_centisecs  500
    vm.dirtytime_expire_seconds   43200
    vm.extfrag_threshold          500
    vm.min_unmapped_ratio         1
    vm.nr_hugepages                0
    vm.nr_hugepages_mempolicy     0
    vm.nr_overcommit_hugepages    0
    vm.swappiness                  10
    vm.watermark_boost_factor    15000
    vm.watermark_scale_factor     10
    vm.zone_reclaim_mode          0
```

```
17. /sys/kernel/mm/transparent_hugepage
    defrag           always defer defer+madvise [madvise] never
    enabled          always [madvise] never
    hpage_pmd_size  2097152
    shmem_enabled   always within_size advise [never] deny force
```

```
18. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs  60000
    defrag                  1
    max_ptes_none          511
    max_ptes_shared        256
    max_ptes_swap          64
    pages_to_scan          4096
    scan_sleep_millisecs  10000
```

```
19. OS release
    From /etc/*-release /etc/*-version
    os-release Ubuntu 22.04.2 LTS
```

```
20. Disk information
    SPEC is set to: /home/cpu2017
    Filesystem            Type  Size  Used Avail Use% Mounted on
    /dev/mapper/ubuntu--vg-ubuntu--lv ext4  2.9T  81G  2.7T  3% /
```

```
21. /sys/devices/virtual/dmi/id
    Vendor:          HPE
    Product:         ProLiant DL380a Gen11
    Product Family: ProLiant
    Serial:          CNX22602NL
```

```
22. dmidecode
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Platform Notes (Continued)

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

16x Samsung M321R8GA0BB0-CQKDG 64 GB 2 rank 4800

8x UNKNOWN NOT AVAILABLE

23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 1.22
BIOS Date: 01/18/2023
BIOS Revision: 1.22
Firmware Revision: 1.20

Compiler Version Notes

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Compiler Version Notes (Continued)

Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2022.1.0 Build 20220316
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-fno-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-finite-math-only
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin
-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Base Optimization Flags (Continued)

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -fno-omit-frame-pointer  
-mfpmath=sse -funroll-loops -fopt-mem-layout-trans=4  
-fno-standard-realloc-lhs -falign array32byte -fno-align-functions  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Peak Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64  
502.gcc_r: -D_FILE_OFFSET_BITS=64  
505.mcf_r: -DSPEC_LP64  
520.omnetpp_r: -DSPEC_LP64  
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX  
525.x264_r: -DSPEC_LP64  
531.deepsjeng_r: -DSPEC_LP64  
541.leela_r: -DSPEC_LP64  
548.exchange2_r: -DSPEC_LP64  
557.xz_r: -DSPEC_LP64
```

Peak Optimization Flags

C benchmarks:

```
500.perlbench_r: -w -std=c11 -m64 -Wl,-z,muldefs  
-fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

Peak Optimization Flags (Continued)

500.perlbench_r (continued):

```
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-strict-overflow  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

502.gcc_r: -m32

```
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/ia32_lin  
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)  
-fprofile-use=default.profdata(pass 2) -xCORE-AVX512  
-Ofast -ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -L/usr/local/jemalloc32-5.0.1/lib  
-ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -Ofast  
-ffast-math -flto -mfpmath=sse -funroll-loops  
-qopt-mem-layout-trans=4 -fno-alias  
-L/usr/local/intel/compiler/2022.1.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.html>
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.html

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-Intel-SPR-rev1.1.xml>
http://www.spec.org/cpu2017/flags/Intel-ic2022-official-linux64_revA.xml



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL380a Gen11

(2.00 GHz, Intel Xeon Platinum 8480+)

SPECrate®2017_int_base = 927

SPECrate®2017_int_peak = 958

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Feb-2023

Hardware Availability: Jan-2023

Software Availability: Feb-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-02-25 11:00:01-0500.

Report generated on 2024-01-29 17:25:28 by CPU2017 PDF formatter v6716.

Originally published on 2023-03-14.