



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

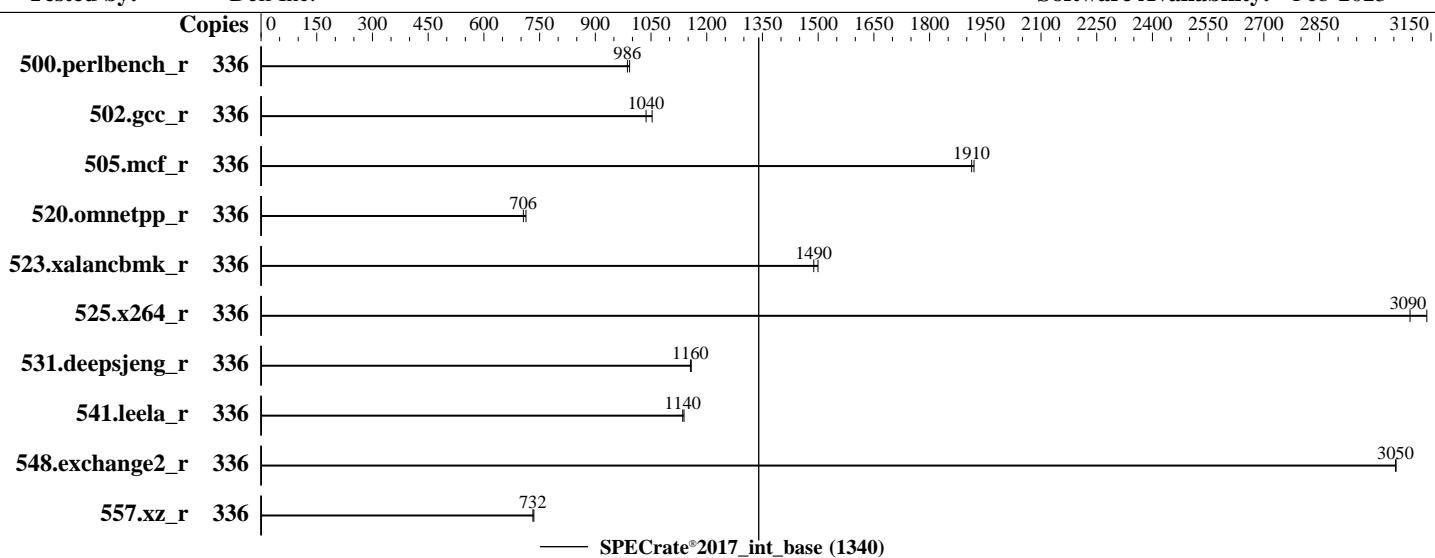

Hardware

CPU Name: AMD EPYC 9634
Max MHz: 3700
Nominal: 2250
Enabled: 168 cores, 2 chips, 2 threads/core
Orderable: 1,2 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 384 MB I+D on chip per chip, 32 MB shared / 7 cores
Other: None
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)
Storage: 170 GB on tmpfs
Other: None

Software

OS: Ubuntu 22.04.1 LTS
Compiler: 5.15.0-60-generic
Parallel: C/C++/Fortran: Version 4.0.0 of AOCC
Firmware: No
File System: Version 1.3.7 released Mar-2023
System State: tmpfs
Base Pointers: Run level 5 (graphical multi-user)
Peak Pointers: 64-bit
Other: Not Applicable
Power Management: None
BIOS and OS set to prefer performance at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	336	539	992	542	986											
502.gcc_r	336	452	1050	459	1040											
505.mcf_r	336	283	1920	284	1910											
520.omnetpp_r	336	624	706	618	713											
523.xalancbmk_r	336	238	1490	237	1500											
525.x264_r	336	187	3140	190	3090											
531.deepsjeng_r	336	333	1160	332	1160											
541.leela_r	336	489	1140	490	1140											
548.exchange2_r	336	288	3060	288	3050											
557.xz_r	336	494	735	496	732											

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
 To free node-local memory and avoid remote memory usage,
 'sysctl -w vm.zone_reclaim_mode=1' run as root.
 To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
 To disable address space layout randomization (ASLR) to reduce run-to-run
 variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) only on request for base runs,
 'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled' run as root.
 To enable THP for all allocations for peak runs,
 'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
 'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/mnt/ramdisk/cpu2017-1.1.9-aocc400-Ble/amd_rate_aocc400_genoa_B_lib/lib:/mnt/ramdisk/cpu2017-1.1.9-
  cc400-Ble/amd_rate_aocc400_genoa_B_lib/lib32:"
MALLOC_CONF = "retain:true"
```

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 170 GB ramdisk created with the cmd: "mount -t tmpfs -o size=170G tmpfs /mnt/ramdisk"

Platform Notes

BIOS settings:

```
  DRAM Refresh Delay : Performance
  DIMM Self Healing on
  Uncorrectable Memory Error : Disabled
  Virtualization Technology : Disabled
    NUMA Nodes per Socket : 4
    L3 Cache as NUMA Domain : Enabled

  System Profile : Custom
  Memory Patrol Scrub : Disabled
  PCI ASPM L1 Link
    Power Management : Disabled
    Determinism Slider : Power Determinism
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-Ble/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on ubuntu-genoa Tue Mar 7 04:53:23 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Platform Notes (Continued)

```
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS
```

```
1. uname -a
Linux ubuntu-genoa 5.15.0-60-generic #66-Ubuntu SMP Fri Jan 20 14:29:49 UTC 2023 x86_64 x86_64 x86_64
GNU/Linux
```

```
2. w
04:53:23 up 8 min, 1 user, load average: 0.39, 0.18, 0.10
USER      TTY      FROM          LOGIN@    IDLE     JCPU     PCPU WHAT
root      tty1          -          04:50   50.00s  1.80s  0.36s /bin/bash ./amd_rate_aocc400_genoa_B1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
time(seconds)      unlimited
file(blocks)       unlimited
data(kbytes)        unlimited
stack(kbytes)       unlimited
coredump(blocks)    0
memory(kbytes)      unlimited
locked memory(kbytes) 2097152
process            6190194
nofiles             1024
vmemory(kbytes)     unlimited
locks               unlimited
rtprio              0
```

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-specrate.sh --output_format csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc
python3 ./run_amd_rate_aocc400_genoa_B1.py
/bin/bash ./amd_rate_aocc400_genoa_B1.sh
runcpu --config amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
  csv,html,pdf,txt -define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc intrate
runcpu --configfile amd_rate_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
  csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --nopower --rumode rate --tune base --size
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Platform Notes (Continued)

```
test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e

-----
6. /proc/cpuinfo
model name      : AMD EPYC 9634 84-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101116
bugs            : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 84
siblings        : 168
2 physical ids (chips)
336 processors (hardware threads)
physical id 0: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 1: core ids 0-6,8-14,16-22,24-30,32-38,40-46,48-54,56-62,64-70,72-78,80-86,88-94
physical id 0: apicids 0-13,16-29,32-45,48-61,64-77,80-93,96-109,112-125,128-141,144-157,160-173,176-189
physical id 1: apicids
256-269,272-285,288-301,304-317,320-333,336-349,352-365,368-381,384-397,400-413,416-429,432-445
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

-----
```

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 336
On-line CPU(s) list:    0-335
Vendor ID:               AuthenticAMD
Model name:              AMD EPYC 9634 84-Core Processor
CPU family:              25
Model:                  17
Thread(s) per core:     2
Core(s) per socket:     84
Socket(s):              2
Stepping:                1
Frequency boost:        enabled
CPU max MHz:            3700.1951
CPU min MHz:            1500.0000
BogoMIPS:                4501.27
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
                        constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfimperf rapl
                        pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
                        popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
                        abm sse4a misalignsse 3dnnowprefetch osvw ibs skinit wdt tce topoext
                        perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
                        invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsgsbase bmi1
                        avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
                        avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                        xsavec xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Platform Notes (Continued)

```
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt
lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pkv ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpocntdq la57 rdpid overflow_recov succor smca fsrm flush_lld
```

Virtualization:

L1d cache: 5.3 MiB (168 instances)

L1i cache: 5.3 MiB (168 instances)

L2 cache: 168 MiB (168 instances)

L3 cache: 768 MiB (24 instances)

NUMA node(s): 8

NUMA node0 CPU(s): 0-6,28-34,56-62,168-174,196-202,224-230

NUMA node1 CPU(s): 14-20,42-48,70-76,182-188,210-216,238-244

NUMA node2 CPU(s): 21-27,49-55,77-83,189-195,217-223,245-251

NUMA node3 CPU(s): 7-13,35-41,63-69,175-181,203-209,231-237

NUMA node4 CPU(s): 84-90,112-118,140-146,252-258,280-286,308-314

NUMA node5 CPU(s): 98-104,126-132,154-160,266-272,294-300,322-328

NUMA node6 CPU(s): 105-111,133-139,161-167,273-279,301-307,329-335

NUMA node7 CPU(s): 91-97,119-125,147-153,259-265,287-293,315-321

Vulnerability Itlb multihit: Not affected

Vulnerability Llrf: Not affected

Vulnerability Mds: Not affected

Vulnerability Meltdown: Not affected

Vulnerability Mmio stale data: Not affected

Vulnerability Retbleed: Not affected

Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization

Vulnerability Spectre v2: Mitigation; Retpolines, IBPB conditional, IBRS_FW, STIBP always-on, RSB filling, PBRSB-eIBRS Not affected

Vulnerability Srbds: Not affected

Vulnerability Tsx async abort: Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	5.3M	8	Data	1	64	1	64
L1i	32K	5.3M	8	Instruction	1	64	1	64
L2	1M	168M	8	Unified	2	2048	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-6,28-34,56-62,168-174,196-202,224-230

node 0 size: 193070 MB

node 0 free: 188134 MB

node 1 cpus: 14-20,42-48,70-76,182-188,210-216,238-244

node 1 size: 193524 MB

node 1 free: 192760 MB

node 2 cpus: 21-27,49-55,77-83,189-195,217-223,245-251

node 2 size: 193524 MB

node 2 free: 192724 MB

node 3 cpus: 7-13,35-41,63-69,175-181,203-209,231-237

node 3 size: 193472 MB

node 3 free: 192689 MB

node 4 cpus: 84-90,112-118,140-146,252-258,280-286,308-314

node 4 size: 193524 MB

node 4 free: 192918 MB

node 5 cpus: 98-104,126-132,154-160,266-272,294-300,322-328

node 5 size: 193524 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: May-2023

Tested by: Dell Inc.

Software Availability: Feb-2023

Platform Notes (Continued)

```
node 5 free: 192856 MB
node 6 cpus: 105-111,133-139,161-167,273-279,301-307,329-335
node 6 size: 193524 MB
node 6 free: 192851 MB
node 7 cpus: 91-97,119-125,147-153,259-265,287-293,315-321
node 7 size: 193494 MB
node 7 free: 192901 MB
node distances:
node   0   1   2   3   4   5   6   7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

-----
9. /proc/meminfo
MemTotal:      1584803368 kB

-----
10. who -r
run-level 5 Mar 7 04:47

-----
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.6)
Default Target      Status
graphical           degraded

-----
12. Failed units, from systemctl list-units --state=failed
          LOAD ACTIVE SUB DESCRIPTION
* systemd-networkd-wait-online.service loaded failed failed Wait for Network to be Configured

-----
13. Services, from systemctl list-unit-files
STATE            UNIT FILES
enabled          ModemManager apparmor blk-availability cloud-config cloud-final cloud-init
                  cloud-init-local console-setup cron dmesg e2scrub_reap finalrd getty@ gpu-manager
                  grub-common grub-initrd-fallback irqbalance keyboard-setup lm-sensors lvm2-monitor
                  lxd-agent multipathd networkd-dispatcher open-iscsi open-vm-tools pollinate rsyslog
                  secureboot-db setvtrgb ssh systemd-networkd systemd-networkd-wait-online systemd-pstore
                  systemd-resolved systemd-timesyncd thermald tuned ua-reboot-cmds ubuntu-advantage udisks2
                  ufw vgaauth
enabled-runtime  netplan-ovs-cleanupsystemd-fsck-root systemd-remount-fs
disabled         console-getty debug-shell iscsid nftables rsync serial-getty@
                  systemd-boot-check-no-failures systemd-network-generator systemd-sysext
                  systemd-time-wait-sync upower
generated        apport
indirect         uuidd
masked          cryptdisks cryptdisks-early hwclock lvm2 multipath-tools-boot rc rcS screen-cleanup sudo
                  x11-common

-----
14. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/vmlinuz-5.15.0-60-generic
root=/dev/mapper/ubuntu--vg-ubuntu--lv
ro
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Platform Notes (Continued)

```
15. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.

    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 2250MHz
```

```
16. tuned-adm active
Current active profile: latency-performance
```

```
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                  0
vm.dirty_expire_centisecs      3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy       0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode            1
```

```
18. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled    always within_size advise [never] deny force
```

```
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag              1
max_ptes_none      511
max_ptes_shared    256
max_ptes_swap      64
pages_to_scan      4096
scan_sleep_millisecs 10000
```

```
20. OS release
From /etc/*-release /etc/*-version
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Platform Notes (Continued)

os-release Ubuntu 22.04.1 LTS

21. Disk information

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e
Filesystem Type Size Used Avail Use% Mounted on
tmpfs tmpfs 170G 3.5G 167G 3% /mnt/ramdisk

22. /sys/devices/virtual/dmi/id

Vendor: Dell Inc.
Product: PowerEdge R7625
Product Family: PowerEdge
Serial: 1234567

23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x 80CE000080CE M321R8GA0BB0-CQKEG 64 GB 2 rank 4800
22x 80CE000080CE M321R8GA0BB0-CQKVG 64 GB 2 rank 4800

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.
BIOS Version: 1.3.7
BIOS Date: 03/06/2023
BIOS Revision: 1.3

Compiler Version Notes

=====

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

C++ | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin

=====

=====

Fortran | 548.exchange2_r(base)

=====

AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3 -z muldefs -O3  
-march=znver4 -fveclib=AMDLIBM -ffast-math  
-mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt  
-fvirtual-function-elimination -fvisibility=hidden -lamdlibm -lflang  
-lamdalloc-ext
```

Fortran benchmarks:

```
-m64 -ftlo -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fepilog-vectorization-of-inductions  
-mllvm -optimize-strided-mem-cost -floop-transform  
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm  
-lflang -lamdalloc
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R7625 (AMD EPYC 9634 84-Core Processor)

SPECrate®2017_int_base = 1340

SPECrate®2017_int_peak = Not Run

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: May-2023

Software Availability: Feb-2023

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-03-06 23:53:22-0500.

Report generated on 2023-05-09 15:55:31 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.