



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

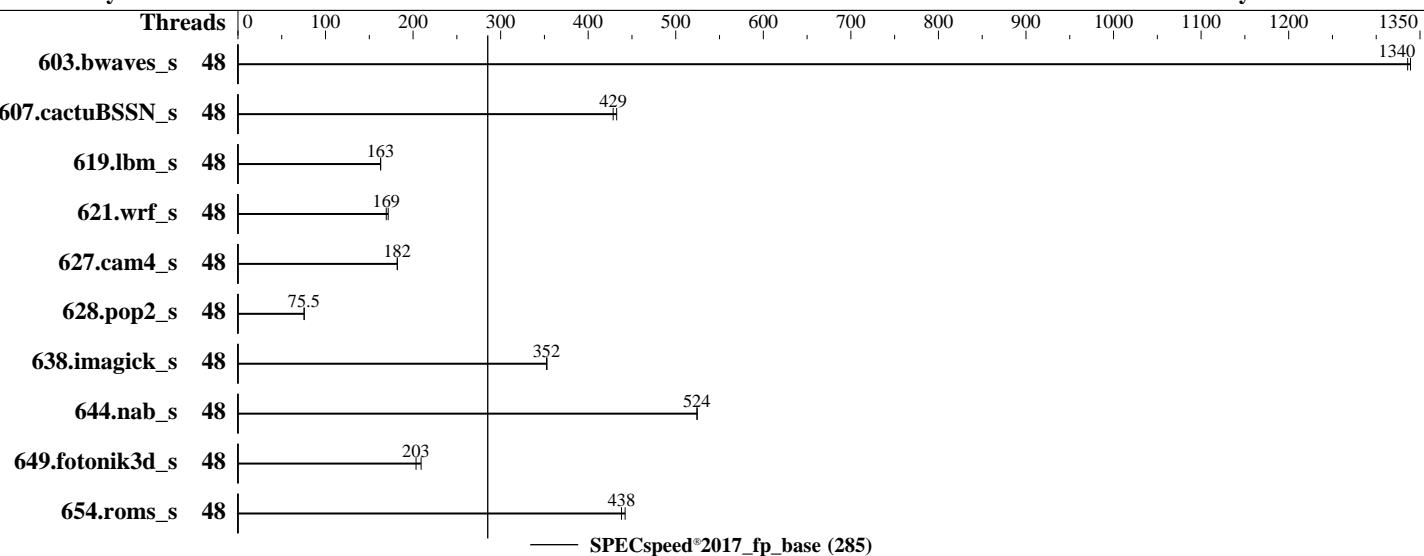

### Hardware

CPU Name: AMD EPYC 9254  
Max MHz: 4150  
Nominal: 2900  
Enabled: 48 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 128 MB I+D on chip per chip, 32 MB shared / 6 cores  
Other: None  
Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-4800B-R)  
Storage: 125 GB on tmpfs  
Other: None

### Software

OS: Ubuntu 22.04.1 LTS  
Compiler: 5.15.0-46-generic  
Parallel: C/C++/Fortran: Version 4.0.0 of AOCC  
Firmware: Yes  
File System: Version 1.3.7 released Mar-2023  
System State: tmpfs  
Base Pointers: Run level 3 (multi-user)  
Peak Pointers: 64-bit  
Other: Not Applicable  
Power Management: None  
BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Results Table

Benchmark	Base								Peak								
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	
603.bwaves_s	48	44.1	1340	<u>44.2</u>	<u>1340</u>												
607.cactuBSSN_s	48	38.5	433	<u>38.9</u>	<u>429</u>												
619.lbm_s	48	32.1	163	<u>32.2</u>	<u>163</u>												
621.wrf_s	48	77.1	172	<u>78.1</u>	<u>169</u>												
627.cam4_s	48	<u>48.7</u>	<u>182</u>	48.7	182												
628.pop2_s	48	<u>157</u>	<u>75.5</u>	157	75.7												
638.imagick_s	48	<u>40.9</u>	<u>352</u>	40.9	353												
644.nab_s	48	<u>33.3</u>	<u>524</u>	33.3	525												
649.fotonik3d_s	48	<u>44.8</u>	<u>203</u>	43.6	209												
654.roms_s	48	<u>35.9</u>	<u>438</u>	35.6	442												
SPECspeed®2017_fp_base = 285								SPECspeed®2017_fp_peak = Not Run									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
 'numactl' was used to bind copies to the cores.  
 See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
 'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:  
 numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
 To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
 To free node-local memory and avoid remote memory usage,  
 'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
 To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
 To disable address space layout randomization (ASLR) to reduce run-to-run  
 variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
 'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
 'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.  
 To always enable THP for peak runs of:  
 603.bwaves\_s, 607.cactuBSSN\_s, 619.lbm\_s, 627.cam4\_s, 628.pop2\_s, 638.imagick\_s, 644.nab\_s, 649.fotonik3d\_s:  
 'echo madvise > /sys/kernel/mm/transparent\_hugepage/enabled; echo always > /sys/kernel/mm/transparent\_hugepage/defrag'  
 run as root.

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

**SPECspeed®2017\_fp\_base = 285**

**SPECspeed®2017\_fp\_peak = Not Run**

**CPU2017 License:** 6573

**Test Sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test Date:** Mar-2023

**Hardware Availability:** Mar-2023

**Software Availability:** Nov-2022

## Operating System Notes (Continued)

```
To disable THP for peak runs of 621.wrf_s:  
'echo never > /sys/kernel/mm/transparent_hugepage/enabled; echo always > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.  
To enable THP only on request for peak runs of 654.roms_s:  
'echo madvise > /sys/kernel/mm/transparent_hugepage/enabled; echo madvise > /sys/kernel/mm/transparent_hugepage/defrag'  
run as root.
```

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
GOMP_CPU_AFFINITY = "0-47"  
LD_LIBRARY_PATH = "/mnt/ramdisk/cpu2017-1.1.9-aocc400-Ble/amd_speed_aocc400_genoa_B_lib/lib:  
LIBOMP_NUM_HIDDEN_HELPER_THREADS = "0"  
MALLOC_CONF = "oversize_threshold:0,retain:true"  
OMP_DYNAMIC = "false"  
OMP_SCHEDULE = "static"  
OMP_STACKSIZE = "128M"  
OMP_THREAD_LIMIT = "48"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 125 GB ramdisk created with the cmd: "mount -t tmpfs -o size=125G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    DRAM Refresh Delay : Performance  
    DIMM Self Healing on  
    Uncorrectable Memory Error : Disabled  
        Logical Processor : Disabled  
    Virtualization Technology : Disabled  
        L3 Cache as NUMA Domain : Enabled  
  
    System Profile : Custom  
        C-States : Disabled  
    Memory Patrol Scrub : Disabled  
    PCI ASPM L1 Link  
        Power Management : Disabled  
        Determinism Slider : Power Determinism  
    Algorithm Performance  
        Boost Disable (ApbDis) : Enabled
```

Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-aocc400-Ble/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

running on genoa-sut Sun Dec 3 07:09:13 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
  2. w
  3. Username
  4. ulimit -a
  5. sysinfo process ancestry
  6. /proc/cpuinfo
  7. lscpu
  8. numactl --hardware
  9. /proc/meminfo
  10. who -r
  11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)
  12. Services, from systemctl list-unit-files
  13. Linux kernel boot-time arguments, from /proc/cmdline
  14. cpupower frequency-info
  15. tuned-adm active
  16. sysctl
  17. /sys/kernel/mm/transparent\_hugepage
  18. /sys/kernel/mm/transparent\_hugepage/khugepaged
  19. OS release
  20. Disk information
  21. /sys/devices/virtual/dmi/id
  22. dmidecode
  23. BIOS
- 

1. uname -a  
Linux genoa-sut 5.15.0-46-generic #49-Ubuntu SMP Thu Aug 4 18:03:25 UTC 2022 x86\_64 x86\_64 x86\_64 GNU/Linux

2. w  
07:09:13 up 4 min, 1 user, load average: 0.15, 0.16, 0.08  
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT  
root tty1 - 28Nov61 25.00s 1.35s 0.28s /bin/bash ./amd\_speed\_aocc400\_genoa\_B1.sh

3. Username  
From environment variable \$USER: root

4. ulimit -a  
time(seconds) unlimited  
file(blocks) unlimited  
data(kbytes) unlimited  
stack(kbytes) unlimited  
coredump(blocks) 0  
memory(kbytes) unlimited  
locked memory(kbytes) 2097152  
process 6190523  
nofiles 1024  
vmmemory(kbytes) unlimited  
locks unlimited  
rtprio 0

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```
5. sysinfo process ancestry
/sbin/init
/bin/login -p --
-bash
/bin/bash ./DELL_speed.sh
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-main.sh speed
/bin/bash ./dell-run-specspeed.sh --output_format csv,html,pdf,txt -define
  Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1
python3 ./run_amd_speed_aocc400_genoa_B1.py
/bin/bash ./amd_speed_aocc400_genoa_B1.sh
runcpu --config amd_speed_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
  csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 fpspeed
runcpu --configfile amd_speed_aocc400_genoa_B1.cfg --tune base --reportable --iterations 2 --output_format
  csv,html,pdf,txt --define Dell-BIOS-inc=Dell-BIOS_EPYC-4.inc --define Dell-BIOS-LogProcD=1 --nopower
  --runmode speed --tune base --size test:train:refspeed fpspeed --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.001/templogs/preenv.fpspeed.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e
```

```
6. /proc/cpuinfo
model name      : AMD EPYC 9254 24-Core Processor
vendor_id       : AuthenticAMD
cpu family     : 25
model          : 17
stepping        : 1
microcode       : 0xa101116
bugs            : sysret_ss_atrs spectre_v1 spectre_v2 spec_store_bypass
TLB size        : 3584 4K pages
cpu cores       : 24
siblings        : 24
2 physical ids (chips)
48 processors (hardware threads)
physical id 0: core ids 0-5,16-21,32-37,48-53
physical id 1: core ids 0-5,16-21,32-37,48-53
physical id 0: apicids 0-5,16-21,32-37,48-53
physical id 1: apicids 64-69,80-85,96-101,112-117
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.
```

```
7. lscpu
```

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          52 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 48
On-line CPU(s) list:    0-47
Vendor ID:               AuthenticAMD
Model name:              AMD EPYC 9254 24-Core Processor
CPU family:              25
Model:                  17
Thread(s) per core:     1
Core(s) per socket:     24
Socket(s):              2
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

Stepping:

Frequency boost:

CPU max MHz:

CPU min MHz:

BogoMIPS:

Flags:

```
1
enabled
4153.0000
400.0000
5801.86
fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb rdtscp lm
constant_tsc rep_good nopl nonstop_tsc cpuid extd_apicid aperfmpfperf rapl
pni pclmulqdq monitor ssse3 fma cx16 pcid sse4_1 sse4_2 x2apic movbe
popcnt aes xsave avx f16c rdrand lahf_lm cmp_legacy svm extapic cr8_legacy
abm sse4a misalignsse 3dnowprefetch osvw ibs skinit wdt tce topoext
perfctr_core perfctr_nb bpext perfctr_llc mwaitx cpb cat_13 cdp_13
invpcid_single hw_pstate ssbd mba ibrs ibpb stibp vmmcall fsbsbase bml1
avx2 smep bmi2 erms invpcid cqmq rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
xsaves xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
avx512_bf16 clzero irperf xsaveerptr rdpru wbnoinvd amd_ppin cppo arat npn
lbrv svm_lock nrrip_save tsc_scale vmcb_clean flushbyasid decodeassists
pausefilter pfthreshold avic v_vmsave_vmload vgif v_spec_ctrl avx512vbmi
umip pkus ospke avx512_vbmi2 gfni vaes vpclmulqdq avx512_vnni avx512_bitalg
avx512_vpocntdq la57 rdpid overflow_recov succor smca fsrm flush_l1d
```

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

NUMA node2 CPU(s):

NUMA node3 CPU(s):

NUMA node4 CPU(s):

NUMA node5 CPU(s):

NUMA node6 CPU(s):

NUMA node7 CPU(s):

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Retbleed:

Vulnerability Spec store bypass:

Mitigation; Speculative Store Bypass disabled via prctl and seccomp

Vulnerability Spectre v1:

Mitigation; usercopy/swapgs barriers and \_\_user pointer sanitization

Vulnerability Spectre v2:

Mitigation; Retpolines, IBPB conditional, IBRS\_FW, STIBP disabled, RSB

filling

Vulnerability Srbds:

Not affected

Vulnerability Tsx async abort:

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	32K	1.5M	8	Data	1	64	1	64
L1i	32K	1.5M	8	Instruction	1	64	1	64
L2	1M	48M	8	Unified	2	2048	1	64
L3	32M	256M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 8 nodes (0-7)

node 0 cpus: 0-5

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Platform Notes (Continued)

```
node 0 size: 193080 MB
node 0 free: 192708 MB
node 1 cpus: 12-17
node 1 size: 193534 MB
node 1 free: 189634 MB
node 2 cpus: 18-23
node 2 size: 193480 MB
node 2 free: 193156 MB
node 3 cpus: 6-11
node 3 size: 193534 MB
node 3 free: 193140 MB
node 4 cpus: 24-29
node 4 size: 193534 MB
node 4 free: 193280 MB
node 5 cpus: 36-41
node 5 size: 193534 MB
node 5 free: 193314 MB
node 6 cpus: 42-47
node 6 size: 193509 MB
node 6 free: 193278 MB
node 7 cpus: 30-35
node 7 size: 193534 MB
node 7 free: 193348 MB
node distances:
node 0 1 2 3 4 5 6 7
 0: 10 11 11 11 32 32 32 32
 1: 11 10 11 11 32 32 32 32
 2: 11 11 10 11 32 32 32 32
 3: 11 11 11 10 32 32 32 32
 4: 32 32 32 32 10 11 11 11
 5: 32 32 32 32 11 10 11 11
 6: 32 32 32 32 11 11 10 11
 7: 32 32 32 32 11 11 11 10
```

```
-----  
9. /proc/meminfo  
MemTotal: 1584887872 kB
```

```
-----  
10. who -r  
run-level 3 Nov 28 23:25
```

```
-----  
11. Systemd service manager version: systemd 249 (249.11-0ubuntu3.4)  
Default Target Status  
multi-user running
```

```
-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES
enabled ModemManager blk-availability cloud-config cloud-final cloud-init cloud-init-local
console-setup cron dmesg e2scrub_reap finalrd getty@ grub-common grub-initrd-fallback
irqbalance keyboard-setup lm-sensors lvm2-monitor lxd-agent networkd-dispatcher open-iscsi
open-vm-tools pollinate rsync rsyslog secureboot-db setvtrgb ssh systemd-networkd
systemd-networkd-wait-online systemd-pstore systemd-resolved systemd-timesyncd thermald
tuned ua-reboot-cmds ubuntu-advantage udisks2 vgauth
enabled-runtime netplan-ovs-cleanups rc-local systemd-remount-fs
disabled apparmor console-getty debug-shell iscsid multipathd nftables powertop serial-getty@
smartmontools sysstat systemd-boot-check-no-failures systemd-network-generator
systemd-sysext systemd-time-wait-sync ufw upower
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```
generated      apport
indirect       uuidd
masked        accounts-daemon alsa-utils atd cryptdisks cryptdisks-early gpu-manager hwclock lvm2
               multipath-tools-boot rc rcS screen-cleanup sudo x11-common

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
    BOOT_IMAGE=/vmlinuz-5.15.0-46-generic
    root=/dev/mapper/ubuntu--vg-ubuntu--lv
    ro

-----
14. cpupower frequency-info
analyzing CPU 0:
    current policy: frequency should be within 400 MHz and 4.15 GHz.
                    The governor "performance" may decide which speed to use
                    within this range.
    boost state support:
        Supported: yes
        Active: yes
        Boost States: 0
        Total States: 3
        Pstate-P0: 2900MHz

-----
15. tuned-adm active
Current active profile: latency-performance

-----
16. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space       0
vm.compaction_proactiveness    20
vm.dirty_background_bytes       0
vm.dirty_background_ratio       3
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                  1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor       10
vm.zone_reclaim_mode           1

-----
17. /sys/kernel/mm/transparent_hugepage
defrag           [always] defer defer+madvise madvise never
enabled          [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force

-----
18. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Platform Notes (Continued)

```
defrag          1
max_ptes_none 511
max_ptes_shared 256
max_ptes_swap 64
pages_to_scan 4096
scan_sleep_millisecs 10000
```

```
-----  
19. OS release  
From /etc/*-release /etc/*-version  
os-release Ubuntu 22.04.1 LTS
```

```
-----  
20. Disk information  
SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-aocc400-B1e  
Filesystem      Type   Size  Used Avail Use% Mounted on  
tmpfs          tmpfs  125G  3.5G  122G   3% /mnt/ramdisk
```

```
-----  
21. /sys/devices/virtual/dmi/id  
Vendor:        Dell Inc.  
Product:       PowerEdge R6625  
Product Family: PowerEdge  
Serial:        BGP4016
```

```
-----  
22. dmidecode  
Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
24x 802C0000802C MTC40F2046S1RC48BA1 64 GB 2 rank 4800
```

```
-----  
23. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:    Dell Inc.  
BIOS Version:   1.3.7  
BIOS Date:      03/06/2023  
BIOS Revision:  1.3
```

## Compiler Version Notes

```
=====  
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)  
-----  
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
```

```
=====  
C++, C, Fortran | 607.cactubSSN_s(base)  
-----  
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)  
Target: x86_64-unknown-linux-gnu
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 6573

Test Date: Mar-2023

Test Sponsor: Dell Inc.

Hardware Availability: Mar-2023

Tested by: Dell Inc.

Software Availability: Nov-2022

## Compiler Version Notes (Continued)

```
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----
```

```
=====
Fortran      | 603.bwaves_s(base) 649.fotonik3d_s(base) 654.roms_s(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----
```

```
=====
Fortran, C    | 621.wrf_s(base) 627.cam4_s(base) 628.pop2_s(base)
-----
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
AMD clang version 14.0.6 (CLANG: AOCC_4.0.0-Build#389 2022_10_07) (based on LLVM Mirror.Version.14.0.6)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-4.0-3206-389/bin
-----
```

## Base Compiler Invocation

C benchmarks:

clang

Fortran benchmarks:

flang

Benchmarks using both Fortran and C:

flang clang

Benchmarks using Fortran, C, and C++:

clang++ clang flang



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactubSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
627.cam4\_s: -DSPEC\_CASE\_FLAG -DSPEC\_LP64  
628.pop2\_s: -DSPEC\_CASE\_FLAG -Mbyteswapio -DSPEC\_LP64  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3 -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Fortran benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -DSPEC\_OPENMP -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -Mrecursive  
-funroll-loops -mllvm -lsr-in-nested-loop  
-mllvm -reduce-array-computations=3 -zopt -fopenmp=libomp -lomp  
-lamdlibm -lamdalloc -lflang

Benchmarks using both Fortran and C:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-enable-X86-prefetching -O3 -march=znver4  
-fveclib=AMDLIB -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC\_OPENMP -zopt -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang

Benchmarks using Fortran, C, and C++:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R6625 (AMD EPYC 9254 24-Core Processor)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECspeed®2017\_fp\_base = 285

SPECspeed®2017\_fp\_peak = Not Run

Test Date: Mar-2023

Hardware Availability: Mar-2023

Software Availability: Nov-2022

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

```
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-x86-use-vzeroupper=false -O3 -march=znver4  
-fveclib=AMDLIBM -ffast-math -fopenmp -flto -fstruct-layout=7  
-mllvm -unroll-threshold=50 -mllvm -inline-threshold=1000  
-fremap-arrays -fstrip-mining -mllvm -reduce-array-computations=3  
-DSPEC_OPENMP -zopt -mllvm -unroll-threshold=100 -finline-aggressive  
-mllvm -loop-unswitch-threshold=200000 -Mrecursive -funroll-loops  
-mllvm -lsr-in-nested-loop -fopenmp=libomp -lomp -lamdlibm -lamdalloc  
-lflang
```

## Base Other Flags

C benchmarks:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Benchmarks using both Fortran and C:

```
-Wno-return-type -Wno-unused-command-line-argument
```

Benchmarks using Fortran, C, and C++:

```
-Wno-return-type -Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc400-flags.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc400-flags.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-AMD-EPYC-v1.0.xml>

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-12-03 02:09:13-0500.

Report generated on 2023-05-09 15:56:47 by CPU2017 PDF formatter v6716.

Originally published on 2023-05-09.