



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488


Test Sponsor: xFusion

Tested by: xFusion

Test Date: Jun-2023

Hardware Availability: Apr-2021

Software Availability: Dec-2022

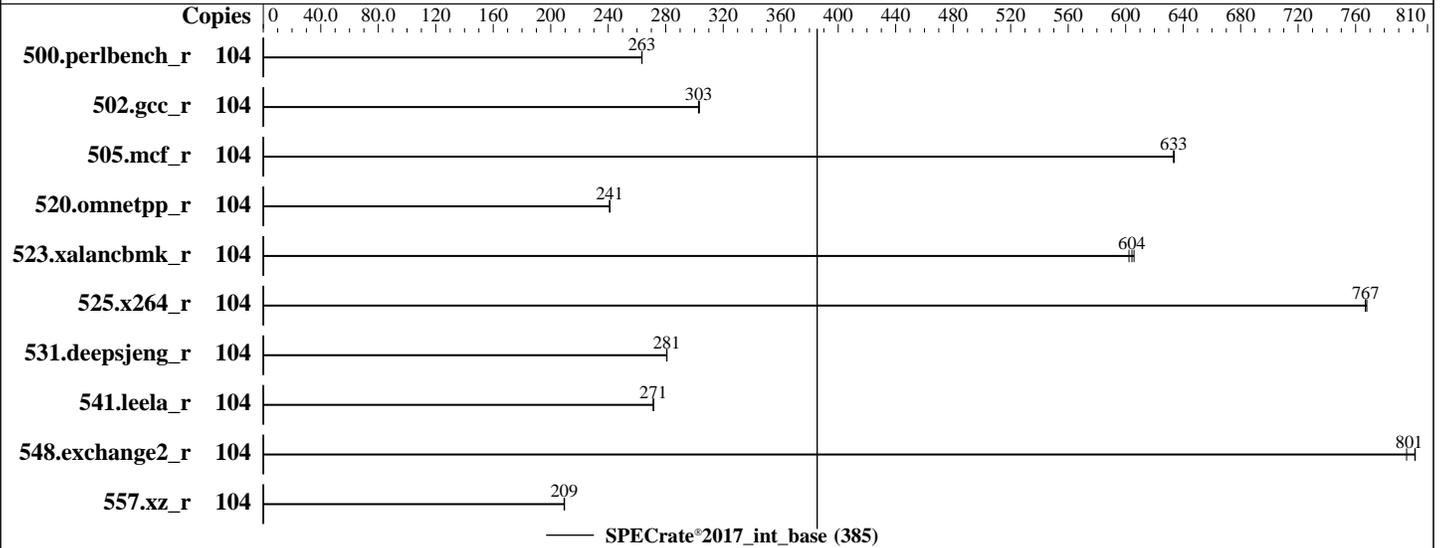

### Hardware

CPU Name: Intel Xeon Gold 5320  
 Max MHz: 3400  
 Nominal: 2200  
 Enabled: 52 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1.25 MB I+D on chip per core  
 L3: 39 MB I+D on chip per chip  
 Other: None  
 Memory: 512 GB (16 x 32 GB 2Rx4 PC4-3200AA-R, running at 2933)  
 Storage: 1 x 1920 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 8.4 (Ootpa) 4.18.0-305.el8.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 1.55 Released May-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: Not Applicable  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jun-2023  
Hardware Availability: Apr-2021  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	104	<b>629</b>	<b>263</b>	628	263	629	263							
502.gcc_r	104	486	303	485	303	<b>486</b>	<b>303</b>							
505.mcf_r	104	<b>265</b>	<b>633</b>	265	633	265	634							
520.omnetpp_r	104	566	241	<b>566</b>	<b>241</b>	566	241							
523.xalancbmk_r	104	<b>182</b>	<b>604</b>	181	606	182	602							
525.x264_r	104	237	768	<b>237</b>	<b>767</b>	238	767							
531.deepsjeng_r	104	424	281	425	281	<b>425</b>	<b>281</b>							
541.leela_r	104	635	271	634	272	<b>635</b>	<b>271</b>							
548.exchange2_r	104	343	795	340	802	<b>340</b>	<b>801</b>							
557.xz_r	104	<b>536</b>	<b>209</b>	537	209	536	210							

SPECrate®2017\_int\_base = 385

SPECrate®2017\_int\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk\_r / 623.xalancbmk\_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 [https://www.spec.org/cpu2017/Docs/runrules.html#rule\\_1.4](https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4)), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH =  
"/spec2017-icc2023.0/lib/intel64:/spec2017-icc2023.0/lib/ia32:/spec2017-icc2023.0/je5.0.1-32"  
MALLOC\_CONF = "retain:true"



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2022

### General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Red Hat Enterprise Linux 8.4  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.

### Platform Notes

BIOS configuration:  
Performance Profile Set to Performance  
SNC Set to Enabled SNC2 (2-clusters)  
  
Sysinfo program /spec2017-icc2023.0/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Mon Jun 26 14:13:54 2023  
  
SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

- 1. uname -a
- 2. w
- 3. Username
- 4. ulimit -a
- 5. sysinfo process ancestry
- 6. /proc/cpuinfo
- 7. lscpu
- 8. numactl --hardware
- 9. /proc/meminfo
- 10. who -r
- 11. Systemd service manager version: systemd 239 (239-45.el8)
- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities
- 21. Disk information
- 22. /sys/devices/virtual/dmi/id
- 23. dmidecode
- 24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 4.18.0-305.el8.x86\_64 #1 SMP Thu Apr 29 08:54:30 EDT 2021 x86\_64 x86\_64 x86\_64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

GNU/Linux

```

-----
2. w
 14:13:54 up 8:24, 2 users, load average: 40.32, 85.60, 97.47
USER  TTY      FROM             LOGIN@   IDLE   JCPU   PCPU WHAT
root  tty1    -                05:50    8:23m 1.47s  0.08s -bash
root  pts/0   70.167.0.2       06:01    4:16m 0.08s  0.08s -bash

```

```

-----
3. Username
From environment variable $USER:  root

```

```

-----
4. ulimit -a
core file size          (blocks, -c) 0
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 2060535
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 2060535
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited

```

```

-----
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 18
login -- root
-bash
-bash
runcpu --define default-platform-flags --copies 104 -c ic2023.0-lin-core-avx512-rate-20221201.cfg --define
smt-on --define cores=52 --define physicalfirst --define invoke_with_interleave --define drop_caches
--tune base --iterations 3 -o all intrate
runcpu --define default-platform-flags --copies 104 --configfile ic2023.0-lin-core-avx512-rate-20221201.cfg
--define smt-on --define cores=52 --define physicalfirst --define invoke_with_interleave --define
drop_caches --tune base --iterations 3 --output_format all --nopower --runmode rate --tune base --size
refrate intrate --nopreenv --note-preenv --logfile $SPEC/tmp/CPU2017.044/templogs/preenv.intrate.044.0.log
--lognum 044.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /spec2017-icc2023.0

```

```

-----
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz
vendor_id      : GenuineIntel
cpu family     : 6
model          : 106
stepping       : 6
microcode      : 0xd000363
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 26
siblings       : 52

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

2 physical ids (chips)  
104 processors (hardware threads)  
physical id 0: core ids 0-25  
physical id 1: core ids 0-25  
physical id 0: apicids 0-51  
physical id 1: apicids 64-115

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

#### 7. lscpu

From lscpu from util-linux 2.32.1:

```
Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                104
On-line CPU(s) list:  0-103
Thread(s) per core:    2
Core(s) per socket:    26
Socket(s):             2
NUMA node(s):         4
Vendor ID:             GenuineIntel
BIOS Vendor ID:       Intel(R) Corporation
CPU family:            6
Model:                106
Model name:            Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz
BIOS Model name:       Intel(R) Xeon(R) Gold 5320 CPU @ 2.20GHz
Stepping:              6
CPU MHz:               2800.000
BogoMIPS:              4400.00
Virtualization:        VT-x
L1d cache:             48K
L1i cache:             32K
L2 cache:              1280K
L3 cache:              39936K
NUMA node0 CPU(s):    0-12,52-64
NUMA node1 CPU(s):    13-25,65-77
NUMA node2 CPU(s):    26-38,78-90
NUMA node3 CPU(s):    39-51,91-103
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts
acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art
arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid aperfmperf pni
pclmulqdq dtes64 ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm
3dnowprefetch cpuid_fault epb cat_l3 invpcid_single ssbd mba ibrs ibpb stibp
ibrs_enhanced tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1
hle avx2 smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts hwp_epp avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid fsrm md_clear
pconfig flush_l1d arch_capabilities
```

#### 8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0-12,52-64
node 0 size: 128118 MB
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

node 0 free: 122729 MB
node 1 cpus: 13-25,65-77
node 1 size: 129018 MB
node 1 free: 123872 MB
node 2 cpus: 26-38,78-90
node 2 size: 129018 MB
node 2 free: 123585 MB
node 3 cpus: 39-51,91-103
node 3 size: 129015 MB
node 3 free: 123725 MB
node distances:
node  0  1  2  3
  0:  10  11  20  20
  1:  11  10  20  20
  2:  20  20  10  11
  3:  20  20  11  10

```

```

-----
9. /proc/meminfo
   MemTotal:      527534652 kB

```

```

-----
10. who -r
    run-level 3 Jun 26 05:50

```

```

-----
11. Systemd service manager version: systemd 239 (239-45.e18)
    Default Target Status
    multi-user      running

```

```

-----
12. Services, from systemctl list-unit-files
STATE      UNIT FILES
enabled    NetworkManager NetworkManager-dispatcher NetworkManager-wait-online atd auditd autovt@ chronyd
           crond firewalld getty@ import-state irqbalance iscsi iscsi-onboot kdump libstoragemgmt
           loadmodules lvm2-monitor mcelog mdmonitor microcode multipathd nis-domainname
           nvme-fc-boot-connections rhsmcertd rsyslog selinux-autorelabel-mark smartd sshd sssd syslog
           sysstat timedatex tuned udisks2 vdo
disabled   arp-ethers blk-availability chrony-wait console-getty cpupower debug-shell ebttables iprdump
           iprinit iprupdate ipsec iscsid iscsiui0 kpatch kvm_stat ledmon nftables nvme-autoconnect oddjob
           psacct rdisc rhod rhsm rhsm-facts serial-getty@ sshd-keygen@ systemd-resolved tcsd
generated  SystemTap compile-server gcc-toolset-10-stap-server gcc-toolset-10-systemtap
           gcc-toolset-9-stap-server gcc-toolset-9-systemtap scripts startup
indirect   sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo
masked     systemd-timedated

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=(hd0,gpt3)/boot/vmlinuz-4.18.0-305.e18.x86_64
root=UUID=711de346-1631-4b60-a626-37488271d525
ro
crashkernel=auto
resume=UUID=d6a3ac10-1ea1-4e42-a80b-54c427bcad19
rhgb
quiet

```

```

-----
14. cpupower frequency-info
    analyzing CPU 0:
        Unable to determine current policy

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

boost state support:  
Supported: yes  
Active: yes

-----  
15. tuned-adm active  
No current active profile.

-----  
16. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 0  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000  
vm.dirty\_ratio 20  
vm.dirty\_writeback\_centisecs 500  
vm.dirtytime\_expire\_seconds 43200  
vm.extfrag\_threshold 500  
vm.min\_unmapped\_ratio 1  
vm.nr\_hugepages 0  
vm.nr\_hugepages\_mempolicy 0  
vm.nr\_overcommit\_hugepages 0  
vm.swappiness 60  
vm.watermark\_boost\_factor 15000  
vm.watermark\_scale\_factor 10  
vm.zone\_reclaim\_mode 0

-----  
17. /sys/kernel/mm/transparent\_hugepage  
defrag always defer+madvise [madvise] never  
enabled [always] madvise never  
hpage\_pmd\_size 2097152  
shmem\_enabled always within\_size advise [never] deny force

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged  
alloc\_sleep\_millisecs 60000  
defrag 1  
max\_ptes\_none 511  
max\_ptes\_swap 64  
pages\_to\_scan 4096  
scan\_sleep\_millisecs 10000

-----  
19. OS release  
From /etc/\*-release /etc/\*-version  
os-release Red Hat Enterprise Linux 8.4 (Ootpa)  
redhat-release Red Hat Enterprise Linux release 8.4 (Ootpa)  
system-release Red Hat Enterprise Linux release 8.4 (Ootpa)

-----  
20. Kernel self-reported vulnerability status, from /sys/devices/system/cpu/vulnerabilities  
itlb\_multihit Not affected  
lltf Not affected  
mds Not affected  
meltdown Not affected  
spec\_store\_bypass Mitigation: Speculative Store Bypass disabled via prctl and seccomp

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

## xFusion

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

spectre\_v1 Mitigation: usercopy/swapgs barriers and \_\_user pointer sanitization  
spectre\_v2 Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling  
srbds Not affected  
tsx\_async\_abort Not affected  
For more information, see the Linux documentation on hardware vulnerabilities, for example <https://www.kernel.org/doc/html/latest/admin-guide/hw-vuln/index.html>

-----  
21. Disk information  
SPEC is set to: /spec2017-icc2023.0  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda3 xfs 420G 47G 374G 12% /  
-----

22. /sys/devices/virtual/dmi/id  
Vendor: XFUSION  
Product: 1288H V6  
Product Family: Whitley  
Serial: Serial  
-----

23. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.  
Memory:  
16x Samsung M393A4K40DB3-CWE 32 GB 2 rank 3200, configured at 2933  
-----

24. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor: XFUSION  
BIOS Version: 1.55  
BIOS Date: 05/09/2023  
BIOS Revision: 1.55  
-----

### Compiler Version Notes

=====  
C | 500.perlbench\_r(base) 502.gcc\_r(base) 505.mcf\_r(base) 525.x264\_r(base) 557.xz\_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
C++ | 520.omnetpp\_r(base) 523.xalancbmk\_r(base) 531.deepsjeng\_r(base) 541.leela\_r(base)  
-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

=====  
Fortran | 548.exchange2\_r(base)  
-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jun-2023  
**Hardware Availability:** Apr-2021  
**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

---

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

**xFusion**

SPECrate®2017\_int\_base = 385

FusionServer 1288H V6 (Intel Xeon Gold 5320)

SPECrate®2017\_int\_peak = Not Run

**CPU2017 License:** 6488

**Test Sponsor:** xFusion

**Tested by:** xFusion

**Test Date:** Jun-2023

**Hardware Availability:** Apr-2021

**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Fortran benchmarks (continued):

```
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-ICX-V1.2.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-06-26 14:13:54-0400.

Report generated on 2024-01-29 17:55:50 by CPU2017 PDF formatter v6716.

Originally published on 2023-07-19.