



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion


SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jul-2023  
Hardware Availability: Jul-2023  
Software Availability: Dec-2022

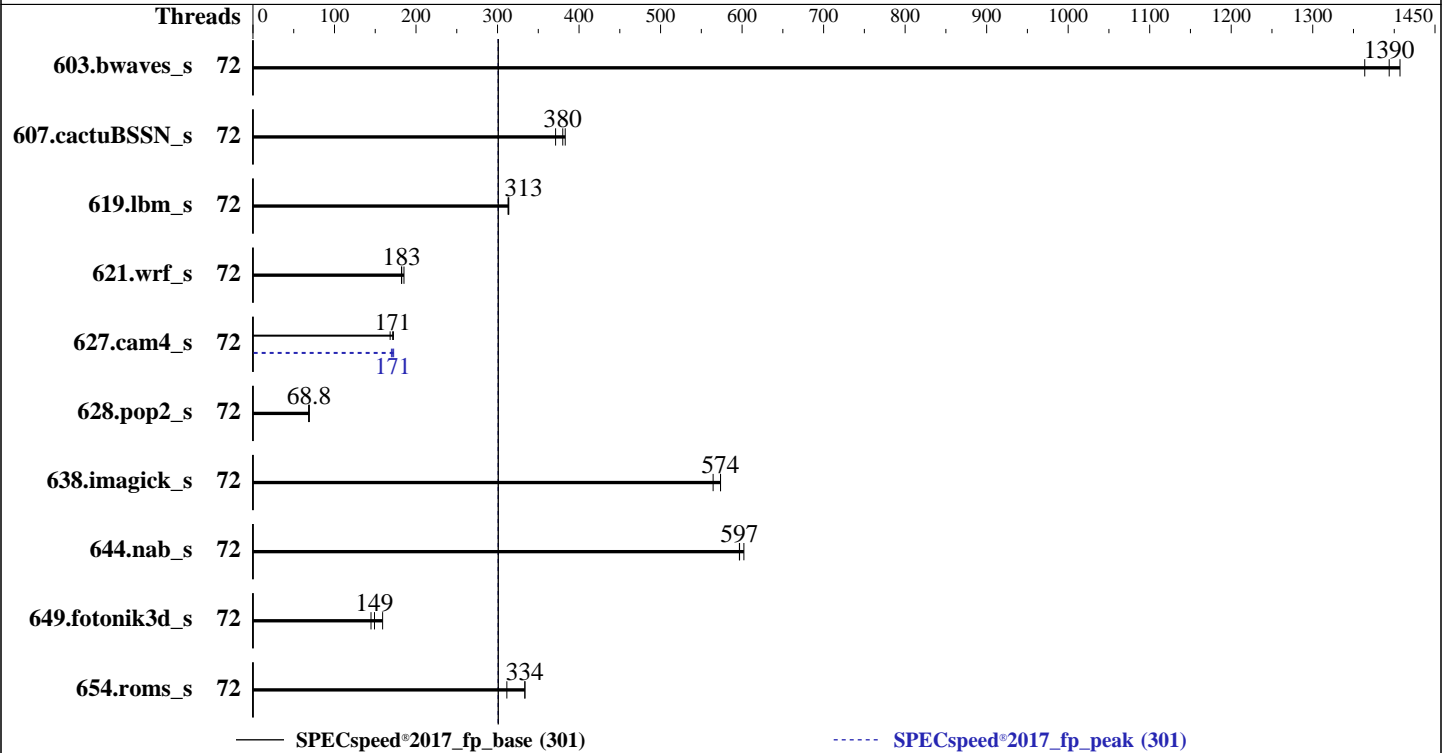

### Hardware

CPU Name: Intel Xeon Gold 6416H  
 Max MHz: 4200  
 Nominal: 2200  
 Enabled: 72 cores, 4 chips  
 Orderable: 1,2,4 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 45 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)  
 Storage: 1 x 960 GB SATA SSD  
 Other: None

### Software

OS: Red Hat Enterprise Linux release 9.0 (Plow)  
 5.14.0-70.13.1.el9\_0.x86\_64  
 Compiler: C/C++: Version 2023.0 of Intel oneAPI DPC++/C++  
 Compiler for Linux;  
 Fortran: Version 2023.0 of Intel Fortran Compiler  
 for Linux;  
 Parallel: Yes  
 Firmware: Version 01.02.00.05 Released Jul-2023  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost  
 of additional power usage



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECSpeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECSpeed®2017\_fp\_peak = 301

CPU2017 License: 6488  
Test Sponsor: xFusion  
Tested by: xFusion

Test Date: Jul-2023  
Hardware Availability: Jul-2023  
Software Availability: Dec-2022

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	72	41.9	1410	<b><u>42.3</u></b>	<b><u>1390</u></b>	43.3	1360	72	41.9	1410	<b><u>42.3</u></b>	<b><u>1390</u></b>	43.3	1360
607.cactuBSSN_s	72	44.9	371	43.5	383	<b><u>43.9</u></b>	<b><u>380</u></b>	72	44.9	371	43.5	383	<b><u>43.9</u></b>	<b><u>380</u></b>
619.lbm_s	72	<b><u>16.7</u></b>	<b><u>313</u></b>	16.7	314	16.7	313	72	<b><u>16.7</u></b>	<b><u>313</u></b>	16.7	314	16.7	313
621.wrf_s	72	72.6	182	71.4	185	<b><u>72.5</u></b>	<b><u>183</u></b>	72	72.6	182	71.4	185	<b><u>72.5</u></b>	<b><u>183</u></b>
627.cam4_s	72	52.7	168	<b><u>51.7</u></b>	<b><u>171</u></b>	51.4	172	72	51.4	173	<b><u>51.7</u></b>	<b><u>171</u></b>	52.2	170
628.pop2_s	72	174	68.3	172	69.1	<b><u>173</u></b>	<b><u>68.8</u></b>	72	174	68.3	172	69.1	<b><u>173</u></b>	<b><u>68.8</u></b>
638.imagick_s	72	<b><u>25.2</u></b>	<b><u>574</u></b>	25.2	574	25.6	564	72	<b><u>25.2</u></b>	<b><u>574</u></b>	25.2	574	25.6	564
644.nab_s	72	29.3	597	<b><u>29.3</u></b>	<b><u>597</u></b>	29.0	602	72	29.3	597	<b><u>29.3</u></b>	<b><u>597</u></b>	29.0	602
649.fotonik3d_s	72	<b><u>61.1</u></b>	<b><u>149</u></b>	63.0	145	57.3	159	72	<b><u>61.1</u></b>	<b><u>149</u></b>	63.0	145	57.3	159
654.roms_s	72	<b><u>47.2</u></b>	<b><u>334</u></b>	47.2	334	50.6	311	72	<b><u>47.2</u></b>	<b><u>334</u></b>	47.2	334	50.6	311

SPECSpeed®2017\_fp\_base = 301

SPECSpeed®2017\_fp\_peak = 301

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:  
KMP\_AFFINITY = "granularity=fine,compact"  
LD\_LIBRARY\_PATH = "/home/Uniautos/cpu2017/lib/intel64:/home/Uniautos/cpu2017/je5.0.1-64"  
MALLOC\_CONF = "retain:true"  
OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM  
memory using Redhat Enterprise Linux 8.0  
Transparent Huge Pages enabled by default  
Prior to runcpu invocation  
Filesystem page cache synced and cleared with:  
sync; echo 3> /proc/sys/vm/drop\_caches  
NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1)  
is mitigated in the system as tested and documented.  
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2)  
is mitigated in the system as tested and documented.  
jemalloc, a general purpose malloc implementation  
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5  
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

## Platform Notes

BIOS configuration:  
Performance Profile Set to Load Balance  
Enable LP [Global] Set to Single LP

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

Sysinfo program /home/Uniautos/cpu2017/bin/sysinfo  
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197  
running on localhost.localdomain Sat Jul 29 17:08:30 2023

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 250 (250-6.e19\_0)
12. Failed units, from systemctl list-units --state=failed
13. Services, from systemctl list-unit-files
14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent\_hugepage
19. /sys/kernel/mm/transparent\_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

-----  
1. uname -a  
Linux localhost.localdomain 5.14.0-70.13.1.e19\_0.x86\_64 #1 SMP PREEMPT Thu Apr 14 12:42:38 EDT 2022 x86\_64  
x86\_64 x86\_64 GNU/Linux  
-----

-----  
2. w  
17:08:30 up 2 min, 1 user, load average: 0.26, 0.22, 0.09  
USER TTY LOGIN@ IDLE JCPU PCPU WHAT  
root pts/0 17:06 12.00s 2.28s 0.25s -bash  
-----

-----  
3. Username  
From environment variable \$USER: root  
-----

-----  
4. ulimit -a  
real-time non-blocking time (microseconds, -R) unlimited  
core file size (blocks, -c) 0  
data seg size (kbytes, -d) unlimited  
scheduling priority (-e) 0  
file size (blocks, -f) unlimited  
pending signals (-i) 4125295  
max locked memory (kbytes, -l) 64  
-----

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

max memory size	(kbytes, -m) unlimited
open files	(-n) 1024
pipe size	(512 bytes, -p) 8
POSIX message queues	(bytes, -q) 819200
real-time priority	(-r) 0
stack size	(kbytes, -s) unlimited
cpu time	(seconds, -t) unlimited
max user processes	(-u) 4125295
virtual memory	(kbytes, -v) unlimited
file locks	(-x) unlimited

```

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
-bash
runcpu --define default-platform-flags -c ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define cores=72
--tune base,peak -o all --define drop_caches fpspeed
runcpu --define default-platform-flags --configfile ic2023.0-lin-sapphirerapids-speed-20221201.cfg --define
cores=72 --tune base,peak --output_format all --define drop_caches --nopower --runmode speed --tune
base:peak --size refspeed fpspeed --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.054/temlogs/preenv.fpspeed.054.0.log --lognum 054.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/Uniautos/cpu2017

```

```

6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Gold 6416H
vendor_id      : GenuineIntel
cpu family     : 6
model          : 143
stepping       : 7
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
cpu cores      : 18
siblings       : 18
4 physical ids (chips)
72 processors (hardware threads)
physical id 0: core ids 0-17
physical id 1: core ids 0-17
physical id 2: core ids 0-17
physical id 3: core ids 0-17
physical id 0: apicids 0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34
physical id 1: apicids 128,130,132,134,136,138,140,142,144,146,148,150,152,154,156,158,160,162
physical id 2: apicids 256,258,260,262,264,266,268,270,272,274,276,278,280,282,284,286,288,290
physical id 3: apicids 384,386,388,390,392,394,396,398,400,402,404,406,408,410,412,414,416,418
Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for
virtualized systems. Use the above data carefully.

```

```

7. lscpu
From lscpu from util-linux 2.37.4:
Architecture:      x86_64
CPU op-mode(s):   32-bit, 64-bit
Address sizes:     46 bits physical, 57 bits virtual
Byte Order:       Little Endian

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

```

CPU(s): 72
On-line CPU(s) list: 0-71
Vendor ID: GenuineIntel
BIOS Vendor ID: Intel(R) Corporation
Model name: Intel(R) Xeon(R) Gold 6416H
BIOS Model name: Intel(R) Xeon(R) Gold 6416H
CPU family: 6
Model: 143
Thread(s) per core: 1
Core(s) per socket: 18
Socket(s): 4
Stepping: 7
Frequency boost: enabled
CPU max MHz: 2201.0000
CPU min MHz: 800.0000
BogoMIPS: 4400.00
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
nonstop_tsc cpuid aperfmperf tsc_known_freq pni pclmulqdq dtes64 monitor
ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1
sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand
lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 cat_l2 cdp_l3
invpcid_single intel_ppin cdp_l2 ssbd mba ibrs ibpb stibp ibrs_enhanced
tpr_shadow vnmi flexpriority ept vpid ept_ad fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl
xsavesopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida
arat pln pts avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes
vpclmulqdq avx512_vnni avx512_bitalg tme avx512_vpoperntdq la57 rdpid
bus_lock_detect cldemote movdiri movdir64b enqcmd fsrm md_clear serialize
tsxldtrk pconfig arch_lbr avx512_fp16 amx_tile flush_l1d arch_capabilities
VT-x

Virtualization:
L1d cache: 3.4 MiB (72 instances)
L1i cache: 2.3 MiB (72 instances)
L2 cache: 144 MiB (72 instances)
L3 cache: 180 MiB (4 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0-17
NUMA node1 CPU(s): 18-35
NUMA node2 CPU(s): 36-53
NUMA node3 CPU(s): 54-71
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	3.4M	12	Data	1	64	1	64
L1i	32K	2.3M	8	Instruction	1	64	1	64
L2	2M	144M	16	Unified	2	2048	1	64
L3	45M	180M	15	Unified	3	49152	1	64

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 4 nodes (0-3)
node 0 cpus: 0-17
node 0 size: 257276 MB
node 0 free: 255731 MB
node 1 cpus: 18-35
node 1 size: 258043 MB
node 1 free: 257632 MB
node 2 cpus: 36-53
node 2 size: 258007 MB
node 2 free: 257570 MB
node 3 cpus: 54-71
node 3 size: 258033 MB
node 3 free: 257597 MB
node distances:
node  0  1  2  3
  0:  10  21  21  21
  1:  21  10  21  21
  2:  21  21  10  21
  3:  21  21  21  10

```

9. /proc/meminfo

MemTotal: 1056113628 kB

10. who -r

run-level 3 Jul 29 17:06

11. Systemd service manager version: systemd 250 (250-6.el9\_0)

Default Target	Status
multi-user	degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* sep5.service	loaded	failed	failed	systemd script to load sep5 driver at boot time

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	NetworkManager NetworkManager-dispatcher NetworkManager-wait-online auditd chronyd crond dbus-broker firewalld getty@ irqbalance kdump mdmonitor microcode nis-domainname rhsmcertd rsyslog selinux-autorelabel-mark sep5 sshd sssd systemd-network-generator tuned udisks2
enabled-runtime	systemd-remount-fs
disabled	chrony-wait console-getty cpupower debug-shell kvm_stat man-db-restart-cache-update nftables rdisc rhsm rhsm-facts rpmdm-rebuild serial-getty@ sshd-keygen@ systemd-boot-check-no-failures systemd-pstore systemd-sysex
indirect	sssd-autofs sssd-kcm sssd-nss sssd-pac sssd-pam sssd-ssh sssd-sudo

14. Linux kernel boot-time arguments, from /proc/cmdline

```

BOOT_IMAGE=(hd0,gpt2)/vmlinuz-5.14.0-70.13.1.el9_0.x86_64
root=UUID=058bdfd1-c62b-4fad-8d41-5c40aa179007
ro
crashkernel=1G-4G:192M,4G-64G:256M,64G-:512M
resume=UUID=b47f1685-a5fa-4d39-b2d7-e3f6e95ad499

```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

nohz\_full=1-255

```
-----
15. cpupower frequency-info
    analyzing CPU 0:
        current policy: frequency should be within 800 MHz and 2.20 GHz.
                        The governor "conservative" may decide which speed to use
                        within this range.
    boost state support:
        Supported: yes
        Active: yes
-----
```

```
-----
16. tuned-adm active
    Current active profile: balanced
-----
```

```
-----
17. sysctl
kernel.numa_balancing          1
kernel.randomize_va_space     2
vm.compaction_proactiveness    20
vm.dirty_background_bytes     0
vm.dirty_background_ratio     10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 20
vm.dirty_writeback_centisecs  500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold          500
vm.min_unmapped_ratio         1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy     0
vm.nr_overcommit_hugepages    0
vm.swappiness                   60
vm.watermark_boost_factor     15000
vm.watermark_scale_factor     10
vm.zone_reclaim_mode          0
-----
```

```
-----
18. /sys/kernel/mm/transparent_hugepage
defrag          always defer defer+madvice [madvice] never
enabled        [always] madvice never
hpage_pmd_size 2097152
shmem_enabled  always within_size advise [never] deny force
-----
```

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
20. OS release
From /etc/*-release /etc/*-version
os-release      Red Hat Enterprise Linux 9.0 (Plow)
redhat-release  Red Hat Enterprise Linux release 9.0 (Plow)
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

### Platform Notes (Continued)

system-release Red Hat Enterprise Linux release 9.0 (Plow)

-----  
21. Disk information

SPEC is set to: /home/Uniautos/cpu2017  
Filesystem Type Size Used Avail Use% Mounted on  
/dev/sda5 xfs 820G 57G 763G 7% /home

-----  
22. /sys/devices/virtual/dmi/id

Vendor: XFUSION  
Product: 2488H V7  
Product Family: EagleStream

-----  
23. dmidecode

Additional information from dmidecode 3.3 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:  
32x Samsung M321R4GA3BB6-CQKDG 32 GB 2 rank 4800

-----  
24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: XFUSION  
BIOS Version: 01.02.00.05  
BIOS Date: 07/13/2023

### Compiler Version Notes

=====  
C | 619.lbm\_s(base, peak) 638.imagick\_s(base, peak) 644.nab\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak) 654.roms\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

-----  
(Continued on next page)





# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## Compiler Version Notes (Continued)

Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak) 628.pop2\_s(base, peak)

-----  
Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.  
-----

## Base Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Base Portability Flags

603.bwaves\_s: -DSPEC\_LP64  
607.cactuBSSN\_s: -DSPEC\_LP64  
619.lbm\_s: -DSPEC\_LP64  
621.wrf\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
627.cam4\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG  
628.pop2\_s: -DSPEC\_LP64 -DSPEC\_CASE\_FLAG -convert big\_endian  
-assume byterecl  
638.imagick\_s: -DSPEC\_LP64  
644.nab\_s: -DSPEC\_LP64  
649.fotonik3d\_s: -DSPEC\_LP64  
654.roms\_s: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-m64 -std=c11 -Wl,-z,muldefs -xsaphirerapids -Ofast -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp  
-DSPEC\_OPENMP -Wno-implicit-int -mprefer-vector-width=512  
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

**xFusion**

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-m64 -Wl,-z,muldefs -DSPEC_OPENMP -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -nostandard-realloc-lhs
-align array32byte -auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using both Fortran and C:

```
-m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4 -fiopenmp
-DSPEC_OPENMP -Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

Benchmarks using Fortran, C, and C++:

```
-m64 -std=c++14 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP -Wno-implicit-int
-mprefer-vector-width=512 -nostandard-realloc-lhs -align array32byte
-auto -L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

## Peak Compiler Invocation

C benchmarks:

icx

Fortran benchmarks:

ifx

Benchmarks using both Fortran and C:

ifx icx

Benchmarks using Fortran, C, and C++:

icpx icx ifx

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

## Peak Optimization Flags

C benchmarks:

619.lbm\_s: basepeak = yes

638.imagick\_s: basepeak = yes

644.nab\_s: basepeak = yes

Fortran benchmarks:

603.bwaves\_s: basepeak = yes

649.fotonik3d\_s: basepeak = yes

654.roms\_s: basepeak = yes

Benchmarks using both Fortran and C:

621.wrf\_s: basepeak = yes

```
627.cam4_s: -m64 -std=c11 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -flto -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fiopenmp -DSPEC_OPENMP
-Wno-implicit-int -mprefer-vector-width=512
-nostandard-realloc-lhs -align array32byte -auto
-L/usr/local/jemalloc64-5.0.1/lib -ljemalloc
```

628.pop2\_s: basepeak = yes

Benchmarks using Fortran, C, and C++:

607.cactuBSSN\_s: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/xFusion-Platform-Settings-SPR-V1.1-revC.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2023 Standard Performance Evaluation Corporation

## xFusion

SPECspeed®2017\_fp\_base = 301

FusionServer 2488H V7 (Intel Xeon Gold 6416H)

SPECspeed®2017\_fp\_peak = 301

**CPU2017 License:** 6488  
**Test Sponsor:** xFusion  
**Tested by:** xFusion

**Test Date:** Jul-2023  
**Hardware Availability:** Jul-2023  
**Software Availability:** Dec-2022

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-07-29 05:08:29-0400.  
Report generated on 2023-08-18 11:04:32 by CPU2017 PDF formatter v6716.  
Originally published on 2023-08-18.