



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Aug-2023

Hardware Availability: Jun-2023

Software Availability: Dec-2022

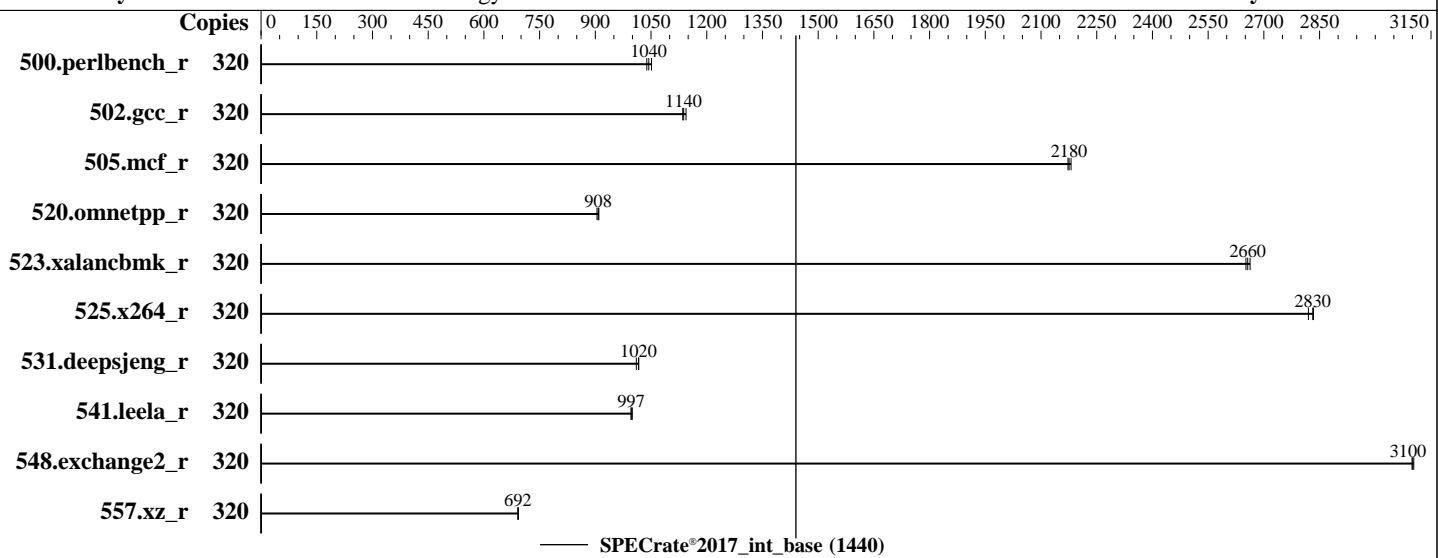

Hardware

CPU Name: Intel Xeon Platinum 8460H
Max MHz: 3800
Nominal: 2200
Enabled: 160 cores, 4 chips, 2 threads/core
Orderable: 2,4 chips
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 2 MB I+D on chip per core
L3: 105 MB I+D on chip per chip
Other: None
Memory: 1 TB (32 x 32 GB 2Rx8 PC5-4800B-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 15 SP4 (x86_64)
Compiler: Kernel 5.14.21-150400.22-default
C/C++: Version 2023.0 of Intel oneAPI DPC++/C++ Compiler for Linux;
Fortran: Version 2023.0 of Intel Fortran Compiler for Linux;
Parallel: No
Firmware: Lenovo BIOS Version RSE105E 1.10 released May-2023
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: Not Applicable
Other: None
Power Management: BIOS and OS set to prefer performance at the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	320	488	1040	491	1040	485	1050									
502.gcc_r	320	398	1140	399	1140	396	1140									
505.mcf_r	320	238	2170	237	2180	238	2180									
520.omnetpp_r	320	462	910	464	904	463	908									
523.xalancbmk_r	320	127	2660	127	2660	127	2650									
525.x264_r	320	198	2830	199	2820	198	2830									
531.deepsjeng_r	320	363	1010	361	1020	361	1020									
541.leela_r	320	532	996	530	1000	532	997									
548.exchange2_r	320	270	3100	271	3100	270	3100									
557.xz_r	320	500	692	499	693	500	692									

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

SPEC has ruled that the compiler used for this result was performing a compilation that specifically improves the performance of the 523.xalancbmk_r / 623.xalancbmk_s benchmarks using a priori knowledge of the SPEC code and dataset to perform a transformation that has narrow applicability.

In order to encourage optimizations that have wide applicability (see rule 1.4 https://www.spec.org/cpu2017/Docs/runrules.html#rule_1.4), SPEC will no longer publish results using this optimization.

This result is left in the SPEC results database for historical reference.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
  "/home/cpu2017-1.1.9-ic2023.0/lib/intel64:/home/cpu2017-1.1.9-ic2023.0/lib/ia32:/home/cpu2017-1.1.9-ic
  2023.0/je5.0.1-32"
MALLOC_CONF = "retain:true"
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C1 Enhanced Mode set to Enabled

DCU Streamer Prefetcher set to Disabled

SNC set to SNC4

UPI Link Disable set to Disabled 1 Link

LLC Prefetch set to Disabled

Sysinfo program /home/cpu2017-1.1.9-ic2023.0/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Mon Aug 7 13:21:17 2023

SUT (System Under Test) info as seen by some common utilities.

Table of contents

1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
 12. Services, from systemctl list-unit-files
 13. Linux kernel boot-time arguments, from /proc/cmdline
 14. cpupower frequency-info
 15. sysctl
 16. /sys/kernel/mm/transparent_hugepage
 17. /sys/kernel/mm/transparent_hugepage/khugepaged
 18. OS release
 19. Disk information
 20. /sys/devices/virtual/dmi/id
 21. dmidecode
 22. BIOS
- -----

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
1. uname -a
Linux localhost 5.14.21-150400.22-default #1 SMP PREEMPT_DYNAMIC Wed May 11 06:57:18 UTC 2022 (49db222)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
13:21:17 up 1:16, 2 users, load average: 0.15, 39.53, 158.03
USER      TTY      FROM             LOGIN@     IDLE    JCPU      PCPU WHAT
root      ttys1          -           12:09   13.00s  1.14s  0.02s -bash
root      pts/0  172.30.81.13  13:18   28.00s  0.03s  0.03s -bash
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size            (kbytes, -d) unlimited
scheduling priority      (-e) 0
file size                (blocks, -f) unlimited
pending signals          (-i) 4126519
max locked memory        (kbytes, -l) 64
max memory size          (kbytes, -m) unlimited
open files               (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues     (bytes, -q) 819200
real-time priority       (-r) 0
stack size               (kbytes, -s) unlimited
cpu time                 (seconds, -t) unlimited
max user processes        (-u) 4126519
virtual memory            (kbytes, -v) unlimited
file locks               (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize 30
login -- root
-bash
-bash
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 -c
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base -o all intrate
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=320 --configfile
  ic2023.0-lin-sapphirerapids-rate-20221201.cfg --define smt-on --define cores=160 --define physicalfirst
  --define invoke_with_interleave --define drop_caches --tune base --output_format all --nopower --runmode
  rate --tune base --size reframe intrate --nopreenv --note-preenv --logfile
  $SPEC/tmp/CPU2017.030/templogs/preenv.intrate.030.0.log --lognum 030.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017-1.1.9-ic2023.0
```

```
6. /proc/cpuinfo
model name      : Intel(R) Xeon(R) Platinum 8460H
vendor_id       : GenuineIntel
cpu family     : 6
model          : 143
stepping        : 8
microcode      : 0x2b0001b0
bugs           : spectre_v1 spectre_v2 spec_store_bypass swapgs
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
cpu cores      : 40
siblings       : 80
4 physical ids (chips)
320 processors (hardware threads)
physical id 0: core ids 0-39
physical id 1: core ids 0-39
physical id 2: core ids 0-39
physical id 3: core ids 0-39
physical id 0: apicids 0-79
physical id 1: apicids 128-207
physical id 2: apicids 256-335
physical id 3: apicids 384-463
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

```
From lscpu from util-linux 2.37.2:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Address sizes:          46 bits physical, 57 bits virtual
Byte Order:              Little Endian
CPU(s):                 320
On-line CPU(s) list:    0-319
Vendor ID:               GenuineIntel
Model name:              Intel(R) Xeon(R) Platinum 8460H
CPU family:              6
Model:                  143
Thread(s) per core:     2
Core(s) per socket:     40
Socket(s):              4
Stepping:                8
BogoMIPS:                4400.00
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36
                        clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology
                        nonstop_tsc cpuid aperf fmperf tsc_known_freq pni pclmulqdq dtes64 ds_cpl
                        vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2
                        x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm
                        abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single
                        intel_ppin cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced tpr_shadow vnmi
                        flexpriority ept vpvid ept_ad fsgsbase tsc_adjust bmil hle avx2 smpq bmi2
                        erms invpcid rtm cqmq rdt_a avx512f avx512dq rdseed adx smap avx512ifma
                        clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec
                        xgetbv1 xsaves cqmq_llc cqmq_occup_llc cqmq_mbm_total cqmq_mbm_local
                        split_lock_detect avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts
                        avx512vbmi umip pku ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
                        avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
                        cldemote movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
                        arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
Virtualization:          VT-x
L1d cache:                7.5 MiB (160 instances)
L1i cache:                5 MiB (160 instances)
L2 cache:                320 MiB (160 instances)
L3 cache:                420 MiB (4 instances)
NUMA node(s):             16
NUMA node0 CPU(s):        0-9,160-169
NUMA node1 CPU(s):        10-19,170-179
NUMA node2 CPU(s):        20-29,180-189
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

NUMA node3 CPU(s):	30-39,190-199
NUMA node4 CPU(s):	40-49,200-209
NUMA node5 CPU(s):	50-59,210-219
NUMA node6 CPU(s):	60-69,220-229
NUMA node7 CPU(s):	70-79,230-239
NUMA node8 CPU(s):	80-89,240-249
NUMA node9 CPU(s):	90-99,250-259
NUMA node10 CPU(s):	100-109,260-269
NUMA node11 CPU(s):	110-119,270-279
NUMA node12 CPU(s):	120-129,280-289
NUMA node13 CPU(s):	130-139,290-299
NUMA node14 CPU(s):	140-149,300-309
NUMA node15 CPU(s):	150-159,310-319
Vulnerability Itlb multihit:	Not affected
Vulnerability Llftf:	Not affected
Vulnerability Mds:	Not affected
Vulnerability Meltdown:	Not affected
Vulnerability Spec store bypass:	Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1:	Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2:	Mitigation; Enhanced IBRS, IBPB conditional, RSB filling
Vulnerability Srbds:	Not affected
Vulnerability Tsx async abort:	Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	2M	320M	16	Unified	2	2048	1	64
L3	105M	420M	15	Unified	3	114688	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 16 nodes (0-15)

node 0 cpus: 0-9,160-169

node 0 size: 64168 MB

node 0 free: 62815 MB

node 1 cpus: 10-19,170-179

node 1 size: 64506 MB

node 1 free: 63749 MB

node 2 cpus: 20-29,180-189

node 2 size: 64506 MB

node 2 free: 63640 MB

node 3 cpus: 30-39,190-199

node 3 size: 64506 MB

node 3 free: 63597 MB

node 4 cpus: 40-49,200-209

node 4 size: 64506 MB

node 4 free: 63777 MB

node 5 cpus: 50-59,210-219

node 5 size: 64506 MB

node 5 free: 63779 MB

node 6 cpus: 60-69,220-229

node 6 size: 64506 MB

node 6 free: 63769 MB

node 7 cpus: 70-79,230-239

node 7 size: 64506 MB

node 7 free: 63778 MB

node 8 cpus: 80-89,240-249

node 8 size: 64506 MB

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
node 8 free: 63772 MB
node 9 cpus: 90-99,250-259
node 9 size: 64506 MB
node 9 free: 63765 MB
node 10 cpus: 100-109,260-269
node 10 size: 64506 MB
node 10 free: 63761 MB
node 11 cpus: 110-119,270-279
node 11 size: 64472 MB
node 11 free: 63717 MB
node 12 cpus: 120-129,280-289
node 12 size: 64506 MB
node 12 free: 63759 MB
node 13 cpus: 130-139,290-299
node 13 size: 64506 MB
node 13 free: 63765 MB
node 14 cpus: 140-149,300-309
node 14 size: 64506 MB
node 14 free: 63770 MB
node 15 cpus: 150-159,310-319
node 15 size: 64423 MB
node 15 free: 63686 MB
node distances:
node   0   1   2   3   4   5   6   7   8   9   10  11  12  13  14  15
  0: 10  12  12  12  21  21  21  21  31  31  31  31  21  21  21  21
  1: 12  10  12  12  21  21  21  21  31  31  31  31  21  21  21  21
  2: 12  12  10  12  21  21  21  21  31  31  31  31  21  21  21  21
  3: 12  12  12  10  21  21  21  21  31  31  31  31  21  21  21  21
  4: 21  21  21  10  12  12  12  21  21  21  21  21  31  31  31  31
  5: 21  21  21  21  12  10  12  12  21  21  21  21  31  31  31  31
  6: 21  21  21  21  12  12  10  12  21  21  21  21  31  31  31  31
  7: 21  21  21  21  12  12  12  10  21  21  21  21  31  31  31  31
  8: 31  31  31  31  21  21  21  21  10  12  12  12  21  21  21  21
  9: 31  31  31  31  21  21  21  21  12  10  12  12  21  21  21  21
 10: 31  31  31  31  21  21  21  21  12  12  10  12  21  21  21  21
 11: 31  31  31  31  21  21  21  21  12  12  12  10  21  21  21  21
 12: 21  21  21  21  31  31  31  31  21  21  21  21  10  12  12  12
 13: 21  21  21  21  31  31  31  31  21  21  21  21  12  10  12  12
 14: 21  21  21  21  31  31  31  31  21  21  21  21  12  12  10  12
 15: 21  21  21  21  31  31  31  31  21  21  21  21  12  12  12  10
```

```
9. /proc/meminfo
MemTotal: 1056413588 kB
```

```
10. who -r
run-level 3 Aug 7 12:05
```

```
11. Systemd service manager version: systemd 249 (249.11+suse.124.g2bc0b2c447)
Default Target Status
multi-user running
```

```
12. Services, from systemctl list-unit-files
STATE          UNIT FILES
enabled        YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron getty@ haveged irqbalance
                issue-generator kbdsettings klog lvm2-monitor nsqd postfix purge-kernels rollback rsyslog
                smartd sshd wickedd wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
enabled-runtime    systemd-remount-fs
disabled          autofs autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
                  chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
                  firewalld gpm grub2-once haveged-switch-root ipmi ipmievfd issue-add-ssh-keys kexec-load
                  lunmask man-db-create multipathd nfs nfs-blkmap rdisc rpcbind rpmconfigcheck rsyncd
                  serial-getty@ smartd_generate_opts snmpd snmptrapd systemd-boot-check-no-failures
                  systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd
indirect          wickedd

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
  BOOT_IMAGE=/boot/vmlinuz-5.14.21-150400.22-default
  root=UUID=07b494b8-a782-4eba-84f2-ef5cae789da8
  splash=silent
  mitigations=auto
  quiet
  security=apparmor

-----
14. cpupower frequency-info
  analyzing CPU 0:
    Unable to determine current policy
    boost state support:
      Supported: yes
      Active: yes

-----
15. sysctl
  kernel.numa_balancing          1
  kernel.randomize_va_space       2
  vm.compaction_proactiveness    20
  vm.dirty_background_bytes       0
  vm.dirty_background_ratio       10
  vm.dirty_bytes                 0
  vm.dirty_expire_centisecs      3000
  vm.dirty_ratio                 20
  vm.dirty_writeback_centisecs   500
  vm.dirtytime_expire_seconds    43200
  vm.extfrag_threshold           500
  vm.min_unmapped_ratio          1
  vm.nr_hugepages                0
  vm.nr_hugepages_mempolicy       0
  vm.nr_overcommit_hugepages     0
  vm.swappiness                   60
  vm.watermark_boost_factor      15000
  vm.watermark_scale_factor       10
  vm.zone_reclaim_mode            0

-----
16. /sys/kernel/mm/transparent_hugepage
  defrag           always defer defer+madvise [madvise] never
  enabled          [always] madvise never
  hpage_pmd_size  2097152
  shmem_enabled   always within_size advise [never] deny force

-----
17. /sys/kernel/mm/transparent_hugepage/khugepaged
  alloc_sleep_millisecs  60000
  defrag              1
  max_ptes_none       511
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Platform Notes (Continued)

```
max_ptes_shared      256
max_ptes_swap        64
pages_to_scan        4096
scan_sleep_millisecs 10000
```

```
-----  
18. OS release  
From /etc/*-release /etc/*-version  
os-release SUSE Linux Enterprise Server 15 SP4
```

```
-----  
19. Disk information  
SPEC is set to: /home/cpu2017-1.1.9-ic2023.0  
Filesystem      Type  Size  Used Avail Use% Mounted on  
/dev/sda3        xfs   445G  12G  433G  3% /
```

```
-----  
20. /sys/devices/virtual/dmi/id  
Vendor:          Lenovo  
Product:         ThinkSystem SR860 V3  
Product Family:  ThinkSystem  
Serial:          None
```

```
-----  
21. dmidecode  
Additional information from dmidecode 3.2 follows. WARNING: Use caution when you interpret this section.  
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately  
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the  
"DMTF SMBIOS" standard.  
Memory:  
 19x Samsung M321R4GA3BB0-CQKDG 32 GB 2 rank 4800  
 6x Samsung M321R4GA3BB0-CQKEG 32 GB 2 rank 4800  
 4x Samsung M321R4GA3BB0-CQKMG 32 GB 2 rank 4800  
 3x Samsung M321R4GA3BB0-CQKVG 32 GB 2 rank 4800
```

```
-----  
22. BIOS  
(This section combines info from /sys/devices and dmidecode.)  
BIOS Vendor:      Lenovo  
BIOS Version:     RSE105E-1.10  
BIOS Date:        05/12/2023  
BIOS Revision:    1.10  
Firmware Revision: 1.10
```

Compiler Version Notes

```
=====  
C      | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base) 525.x264_r(base) 557.xz_r(base)  
=====  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

```
=====  
C++    | 520.omnetpp_r(base) 523.xalancbmk_r(base) 531.deepsjeng_r(base) 541.leela_r(base)  
=====  
Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201  
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Compiler Version Notes (Continued)

=====
Fortran | 548.exchange2_r(base)

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.0.0 Build 20221201
Copyright (C) 1985-2022 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

Base Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math
-fipa -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Lenovo Global Technology

ThinkSystem SR860 V3
(2.20 GHz, Intel Xeon Platinum 8460H)

SPECrate®2017_int_base = 1440

SPECrate®2017_int_peak = Not Run

CPU2017 License: 9017

Test Date: Aug-2023

Test Sponsor: Lenovo Global Technology

Hardware Availability: Jun-2023

Tested by: Lenovo Global Technology

Software Availability: Dec-2022

Base Optimization Flags (Continued)

C++ benchmarks (continued):

```
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/usr/local/intel/compiler/2023.0.0/linux/compiler/lib/intel64_lin  
-lqkmalloc
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.html>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-Eaglestream-W.xml>
<http://www.spec.org/cpu2017/flags/Intel-ic2023-official-linux64.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2023-08-07 01:21:16-0400.

Report generated on 2024-01-29 18:06:07 by CPU2017 PDF formatter v6716.

Originally published on 2023-08-29.