



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

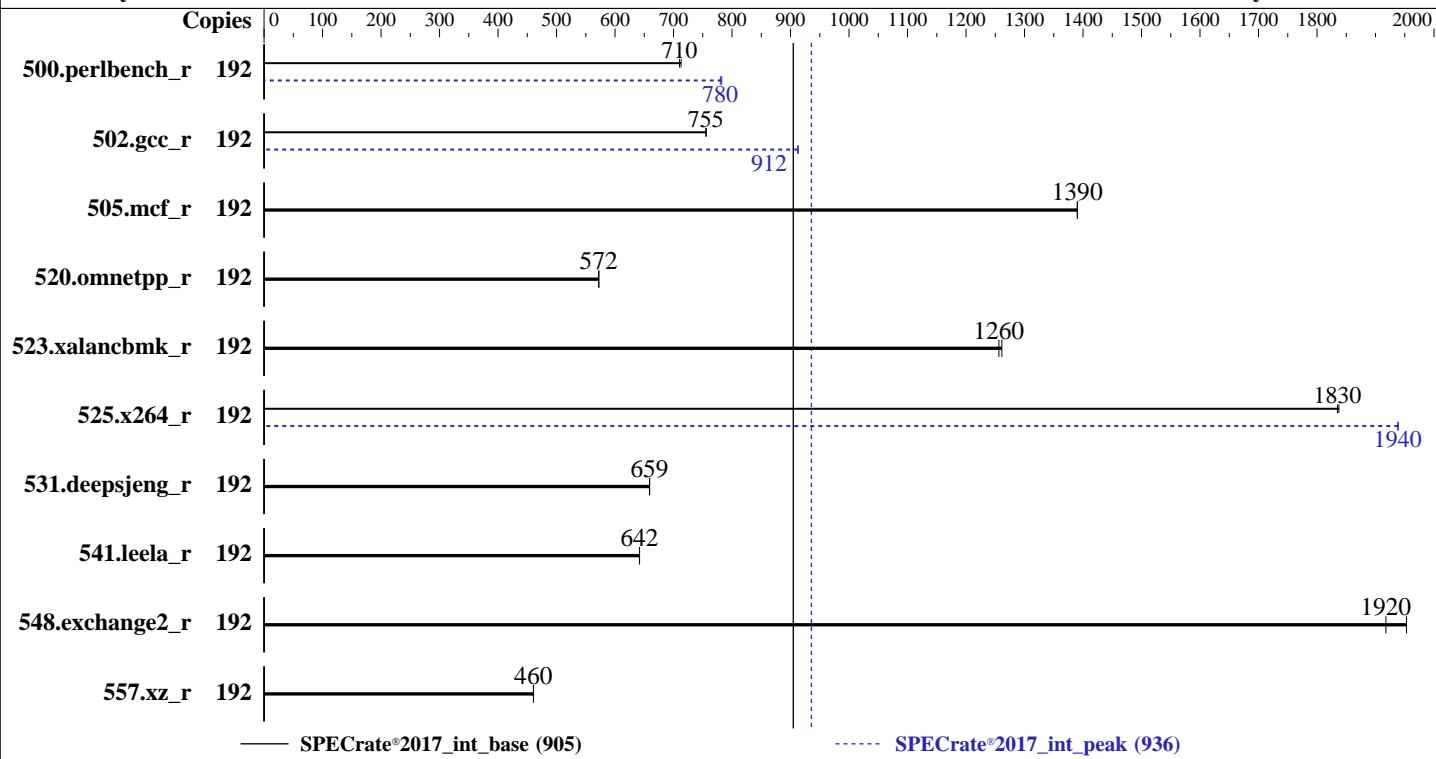

## Hardware

CPU Name: Intel Xeon Platinum 8568Y+  
 Max MHz: 4000  
 Nominal: 2300  
 Enabled: 96 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 2 MB I+D on chip per core  
 L3: 300 MB I+D on chip per chip  
 Other: None  
 Memory: 1 TB (16 x 64 GB 2Rx4 PC5-5600B-R)  
 Storage: 110 GB on tmpfs  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 15 SP5  
 Compiler: 5.14.21-150500.53-default  
 C/C++: Version 2023.2.3 of Intel oneAPI DPC++/C++ Compiler for Linux;  
 Fortran: Version 2023.2.3 of Intel Fortran Compiler for Linux;  
 Parallel: No  
 Firmware: Version 1.9.12 released Nov-2023  
 File System: tmpfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: jemalloc memory allocator V5.0.1  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

**SPECrate®2017\_int\_base = 905**

**SPECrate®2017\_int\_peak = 936**

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Results Table

| Benchmark       | Base   |            |             |            |             |         |       |        | Peak       |             |            |             |         |       |         |       |
|-----------------|--------|------------|-------------|------------|-------------|---------|-------|--------|------------|-------------|------------|-------------|---------|-------|---------|-------|
|                 | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds | Ratio | Copies | Seconds    | Ratio       | Seconds    | Ratio       | Seconds | Ratio | Seconds | Ratio |
| 500.perlbench_r | 192    | 429        | 713         | <b>430</b> | <b>710</b>  |         |       | 192    | <b>392</b> | <b>780</b>  | 391        | 782         |         |       |         |       |
| 502.gcc_r       | 192    | <b>360</b> | <b>755</b>  | 360        | 756         |         |       | 192    | <b>298</b> | <b>912</b>  | 298        | 913         |         |       |         |       |
| 505.mcf_r       | 192    | 223        | 1390        | <b>223</b> | <b>1390</b> |         |       | 192    | 223        | 1390        | <b>223</b> | <b>1390</b> |         |       |         |       |
| 520.omnetpp_r   | 192    | <b>440</b> | <b>572</b>  | 440        | 572         |         |       | 192    | <b>440</b> | <b>572</b>  | 440        | 572         |         |       |         |       |
| 523.xalancbmk_r | 192    | <b>161</b> | <b>1260</b> | 161        | 1260        |         |       | 192    | <b>161</b> | <b>1260</b> | 161        | 1260        |         |       |         |       |
| 525.x264_r      | 192    | 183        | 1840        | <b>183</b> | <b>1830</b> |         |       | 192    | <b>173</b> | <b>1940</b> | 173        | 1940        |         |       |         |       |
| 531.deepsjeng_r | 192    | 334        | 659         | <b>334</b> | <b>659</b>  |         |       | 192    | 334        | 659         | <b>334</b> | <b>659</b>  |         |       |         |       |
| 541.leela_r     | 192    | <b>495</b> | <b>642</b>  | 495        | 642         |         |       | 192    | <b>495</b> | <b>642</b>  | 495        | 642         |         |       |         |       |
| 548.exchange2_r | 192    | 258        | 1950        | <b>262</b> | <b>1920</b> |         |       | 192    | 258        | 1950        | <b>262</b> | <b>1920</b> |         |       |         |       |
| 557.xz_r        | 192    | <b>450</b> | <b>460</b>  | 450        | 461         |         |       | 192    | <b>450</b> | <b>460</b>  | 450        | 461         |         |       |         |       |

**SPECrate®2017\_int\_base = 905**

**SPECrate®2017\_int\_peak = 936**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/intel64:/mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/lib/ia32:/mnt
    /ramdisk/cpu2017-1.1.9-ic2023.2.3/je5.0.1-32"
MALLOC_CONF = "retain:true"
```

## General Notes

Binaries compiled on a system with 2x Intel Xeon Platinum 8280M CPU + 384GB RAM memory using Red Hat Enterprise Linux 8.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

runcpu command invoked through numactl i.e.:

```
numactl --interleave=all runcpu <etc>
```

jemalloc, a general purpose malloc implementation

built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5

sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## General Notes (Continued)

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 110 GB ramdisk created with the cmd: "mount -t tmpfs -o size=110G tmpfs /mnt/ramdisk"

## Platform Notes

BIOS settings:

```
    ADDDC Setting : Disabled
    DIMM Self Healing on
    Uncorrectable Memory Error : Disabled

    Virtualization Technology : Disabled
    DCU Streamer Prefetcher : Disabled
        Sub NUMA Cluster : 2-way Clustering
        LLC Prefetch : Disabled
    Dead Line LLC Alloc : Disabled
    Optimizer Mode : Enabled

    System Profile : Custom
    CPU Power Management : Maximum Performance
        C1E : Disabled
    C States : Autonomous
    Memory Patrol Scrub : Disabled
    Energy Efficiency Policy : Performance
    PCI ASPM L1 Link
        Power Management : Disabled
```

```
Sysinfo program /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Thu Nov 23 15:04:29 2023
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)
12. Services, from systemctl list-unit-files
13. Linux kernel boot-time arguments, from /proc/cmdline
14. sysctl
15. /sys/kernel/mm/transparent\_hugepage
16. /sys/kernel/mm/transparent\_hugepage/khugepaged
17. OS release

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

18. Disk information

19. /sys/devices/virtual/dmi/id

20. dmidecode

21. BIOS

1. uname -a

```
Linux localhost 5.14.21-150500.53-default #1 SMP PREEMPT_DYNAMIC Wed May 10 07:56:26 UTC 2023 (b630043)
x86_64 x86_64 x86_64 GNU/Linux
```

2. w

```
15:04:29 up 5 min, 2 users, load average: 0.21, 0.06, 0.02
USER      TTY      FROM             LOGIN@     IDLE     JCPU     PCPU WHAT
root      tty1          -           15:03   1:01  0.89s  0.00s /bin/bash ./dell-run-speccpu.sh rate
--define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define DL-BIOS-adddcD=1 --define
DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
root      tty2          -           15:03  21.00s  0.01s  0.01s -bash
```

3. Username

From environment variable \$USER: root

4. ulimit -a

```
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size               (blocks, -f) unlimited
pending signals         (-i) 4124165
max locked memory       (kbytes, -l) 64
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size               (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes       (-u) 4124165
virtual memory           (kbytes, -v) unlimited
file locks              (-x) unlimited
```

5. sysinfo process ancestry

```
/usr/lib/systemd/systemd --switched-root --system --deserialize 29
login -- root
-bash
/bin/bash ./DELL_rate.sh
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-main.sh rate
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
/bin/bash ./dell-run-speccpu.sh rate --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1
--define DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 -c
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak -o all --define DL-BIOS-SNC=2
--iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1 intrate
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
runcpu --nobuild --action validate --define default-platform-flags --define numcopies=192 --configfile
ic2023.2.3-lin-sapphirerapids-rate-20231121.cfg --define smt-on --define cores=96 --define physicalfirst
--define invoke_with_interleave --define drop_caches --tune base,peak --output_format all --define
DL-BIOS-SNC=2 --iterations 2 --define DL-BIOSinc=Dell-BIOS_Xeon-5.inc --define DL-BIOS-LogProc=1 --define
DL-BIOS-adddcD=1 --define DL-VERS=v4.8.4 --output_format html,pdf,txt --define DL-LQC=1 --nopower
--runmode rate --tune base:peak --size reframe intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.001/templogs/preenv.intrate.001.0.log --lognum 001.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
$SPEC = /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
```

```
-----  
6. /proc/cpuinfo  
model name      : INTEL(R) XEON(R) PLATINUM 8568Y+  
vendor_id       : GenuineIntel  
cpu family     : 6  
model          : 207  
stepping        : 2  
microcode       : 0x210001b0  
bugs            : spectre_v1 spectre_v2 spec_store_bypass swapgs eibrspbrsb  
cpu cores       : 48  
siblings         : 96  
2 physical ids (chips)  
192 processors (hardware threads)  
physical id 0: core ids 0-47  
physical id 1: core ids 0-47  
physical id 0: apicids 0-95  
physical id 1: apicids 128-223
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

```
-----  
7. lscpu
```

```
From lscpu from util-linux 2.37.4:  
Architecture:           x86_64  
CPU op-mode(s):        32-bit, 64-bit  
Address sizes:         46 bits physical, 57 bits virtual  
Byte Order:            Little Endian  
CPU(s):                192  
On-line CPU(s) list:  0-191  
Vendor ID:             GenuineIntel  
Model name:            INTEL(R) XEON(R) PLATINUM 8568Y+  
CPU family:            6  
Model:                 207  
Thread(s) per core:   2  
Core(s) per socket:  48  
Socket(s):            2  
Stepping:              2  
BogoMIPS:              4600.00  
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36  
clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp  
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology  
nonstop_tsc cpuid aperfmpf perf tsc_known_freq pni pclmulqdq dtes64 monitor  
ds_cpl smx est tm2 ssse3 sdbg fma cx16 xptr pdcm pcid dca sse4_1 sse4_2  
x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm  
abm 3dnowprefetch cpuid_fault epb cat_13 cat_12 cdp_13 invpcid_single  
cdp_12 ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle  
avx2 smep bmi2 erms invpcid rtm cqm rdt_a avx512f avx512dq rdseed adx smap  
avx512ifma clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl  
xsaveopt xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
cqm_mbm_local avx_vnni avx512_bf16 wbnoinvd dtherm ida arat pln pts hfi
avx512vbmi umip pkv ospke waitpkg avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpocntdq la57 rdpid bus_lock_detect
cldemote movdiri movdir64b enqcmd fsrm md_clear serialize tsxldtrk pconfig
arch_lbr avx512_fp16 amx_tile flush_lld arch_capabilities
L1d cache: 4.5 MiB (96 instances)
L1i cache: 3 MiB (96 instances)
L2 cache: 192 MiB (96 instances)
L3 cache: 600 MiB (2 instances)
NUMA node(s): 4
NUMA node0 CPU(s): 0,2,4,8,14,20,28,32,34,38,40,44,48,52,56,60,64,68,74,78,82,84,88,90,96,98,
100,104,110,116,124,128,130,134,136,140,144,148,152,156,160,164,170,174,17
8,180,184,186
NUMA node1 CPU(s): 6,10,12,16,18,22,24,26,30,36,42,46,50,54,58,62,66,70,72,76,80,86,92,94,102
,106,108,112,114,118,120,122,126,132,138,142,146,150,154,158,162,166,168,1
72,176,182,188,190
NUMA node2 CPU(s): 1,3,9,13,19,23,25,29,33,35,39,43,47,51,55,59,63,67,73,77,81,85,89,93,97,99
,105,109,115,119,121,125,129,131,135,139,143,147,151,155,159,163,169,173,1
77,181,185,189
NUMA node3 CPU(s): 5,7,11,15,17,21,27,31,37,41,45,49,53,57,61,65,69,71,75,79,83,87,91,95,101
,103,107,111,113,117,123,127,133,137,141,145,149,153,157,161,165,167,171,17
5,179,183,187,191
Vulnerability Itlb multihit: Not affected
Vulnerability Llft: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl and seccomp
Vulnerability Spectre v1: Mitigation; usercopy/swapgs barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced IBRS, IBPB conditional, RSB filling, PBRSB-eIBRS SW
sequence
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected
```

From lscpu --cache:

| NAME | ONE-SIZE | ALL-SIZE | WAYS | TYPE        | LEVEL | SETS   | PHY-LINE | COHERENCY-SIZE |
|------|----------|----------|------|-------------|-------|--------|----------|----------------|
| L1d  | 48K      | 4.5M     | 12   | Data        | 1     | 64     | 1        | 64             |
| L1i  | 32K      | 3M       | 8    | Instruction | 1     | 64     | 1        | 64             |
| L2   | 2M       | 192M     | 16   | Unified     | 2     | 2048   | 1        | 64             |
| L3   | 300M     | 600M     | 20   | Unified     | 3     | 245760 | 1        | 64             |

-----

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus:

0,2,4,8,14,20,28,32,34,38,40,44,48,52,56,60,64,68,74,78,82,84,88,90,96,98,100,104,110,116,124,128,130,134,1
36,140,144,148,152,156,160,164,170,174,178,180,184,186

node 0 size: 257416 MB

node 0 free: 256858 MB

node 1 cpus:

6,10,12,16,18,22,24,26,30,36,42,46,50,54,58,62,66,70,72,76,80,86,92,94,102,106,108,112,114,118,120,122,126
,132,138,142,146,150,154,158,162,166,168,172,176,182,188,190

node 1 size: 258035 MB

node 1 free: 257500 MB

node 2 cpus:

1,3,9,13,19,23,25,29,33,35,39,43,47,51,55,59,63,67,73,77,81,85,89,93,97,99,105,109,115,119,121,125,129,131
,135,139,143,147,151,155,159,163,169,173,177,181,185,189

node 2 size: 258035 MB

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
node 2 free: 257391 MB
node 3 cpus:
5,7,11,15,17,21,27,31,37,41,45,49,53,57,61,65,69,71,75,79,83,87,91,95,101,103,107,111,113,117,123,127,133,1
37,141,145,149,153,157,161,165,167,171,175,179,183,187,191
node 3 size: 257576 MB
node 3 free: 246517 MB
node distances:
node 0 1 2 3
 0: 10 12 21 21
 1: 12 10 21 21
 2: 21 21 10 12
 3: 21 21 12 10
```

-----  
9. /proc/meminfo  
MemTotal: 1055810308 kB

-----  
10. who -r  
run-level 3 Nov 23 14:59

-----  
11. Systemd service manager version: systemd 249 (249.16+suse.171.gdad0071f15)  
Default Target Status  
multi-user running

-----  
12. Services, from systemctl list-unit-files  
STATE UNIT FILES  
enabled apparmor auditd cron firewalld getty@ irqbalance issue-generator kbdsettings kdump  
kdump-early nvmefc-boot-connections postfix purge-kernels rollback sshd systemd-pstore  
wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny  
enabled-runtime systemd-remount-fs  
disabled boot-sysctl ca-certificates chrony-wait chronyd console-getty debug-shell ebttables  
grub2-once haveged haveged-switch-root issue-add-ssh-keys kexec-load lunmask nfs  
nfs-blkmap nvmf-autoconnect rpcbind rpmconfigcheck rsyncd serial-getty@  
systemd-boot-check-no-failures systemd-network-generator systemd-sysext  
systemd-time-wait-sync systemd-timesyncd  
indirect wickedd

-----  
13. Linux kernel boot-time arguments, from /proc/cmdline  
BOOT\_IMAGE=/boot/vmlinuz-5.14.21-150500.53-default  
root=UUID=b8c6d51c-250a-4d03-852b-82b1db828fe3  
splash=silent  
mitigations=auto  
quiet  
security=apparmor  
crashkernel=386M,high  
crashkernel=72M,low

-----  
14. sysctl  
kernel.numa\_balancing 1  
kernel.randomize\_va\_space 2  
vm.compaction\_proactiveness 20  
vm.dirty\_background\_bytes 0  
vm.dirty\_background\_ratio 10  
vm.dirty\_bytes 0  
vm.dirty\_expire\_centisecs 3000

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

```
vm.dirty_ratio          20
vm.dirty_writeback_centisecs 500
vm.dirtytime_expire_seconds 43200
vm.extfrag_threshold    500
vm.min_unmapped_ratio   1
vm.nr_hugepages         0
vm.nr_hugepages_mempolicy 0
vm.nr_overcommit_hugepages 0
vm.swappiness           60
vm.watermark_boost_factor 15000
vm.watermark_scale_factor 10
vm.zone_reclaim_mode    0

-----
15. /sys/kernel/mm/transparent_hugepage
    defrag      always defer defer+madvise [madvise] never
    enabled     [always] madvise never
    hpage_pmd_size 2097152
    shmem_enabled always within_size advise [never] deny force

-----
16. /sys/kernel/mm/transparent_hugepage/khugepaged
    alloc_sleep_millisecs 60000
    defrag                 1
    max_ptes_none          511
    max_ptes_shared         256
    max_ptes_swap           64
    pages_to_scan          4096
    scan_sleep_millisecs   10000

-----
17. OS release
    From /etc/*-release /etc/*-version
    os-release SUSE Linux Enterprise Server 15 SP5

-----
18. Disk information
    SPEC is set to: /mnt/ramdisk/cpu2017-1.1.9-ic2023.2.3
    Filesystem      Type  Size  Used Avail Use% Mounted on
    tmpfs          tmpfs  110G  5.1G  105G  5% /mnt/ramdisk

-----
19. /sys/devices/virtual/dmi/id
    Vendor:        Dell Inc.
    Product:       PowerEdge R760
    Product Family: PowerEdge
    Serial:        SLR7602

-----
20. dmidecode
    Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section.
    The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
    determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
    "DMTF SMBIOS" standard.
    Memory:
        16x 00CE042300CE M321R8GA0PB0-CWMCH 64 GB 2 rank 5600

-----
21. BIOS
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Platform Notes (Continued)

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: Dell Inc.  
BIOS Version: 1.9.12  
BIOS Date: 11/10/2023  
BIOS Revision: 1.9

## Compiler Version Notes

=====

C | 502.gcc\_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 502.gcc\_r(peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)

=====

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====

=====

Fortran | 548.exchange2\_r(base, peak)

=====

Intel(R) Fortran Compiler for applications running on Intel(R) 64, Version 2023.2.3 Build x  
Copyright (C) 1985-2023 Intel Corporation. All rights reserved.

=====



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Base Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64  
520.omnetpp\_r: -DSPEC\_LP64  
523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX  
525.x264\_r: -DSPEC\_LP64  
531.deepsjeng\_r: -DSPEC\_LP64  
541.leela\_r: -DSPEC\_LP64  
548.exchange2\_r: -DSPEC\_LP64  
557.xz\_r: -DSPEC\_LP64

## Base Optimization Flags

C benchmarks:

-w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/intel64\_lin  
-lqkmalloc

C++ benchmarks:

-w -std=c++14 -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math  
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/intel64\_lin  
-lqkmalloc

Fortran benchmarks:

-w -m64 -Wl,-z,muldefs -xsapphirerapids -O3 -ffast-math -flto  
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4  
-nostandard-realloc-lhs -align array32byte -auto  
-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/intel64\_lin  
-lqkmalloc



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Compiler Invocation

C benchmarks:

icx

C++ benchmarks:

icpx

Fortran benchmarks:

ifx

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LP64 -DSPEC\_LINUX\_X64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LP64 -DSPEC\_LINUX

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: -w -std=c11 -m64 -Wl,-z,muldefs

-fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-fno-strict-overflow

-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/intel64\_lin

-lqkmalloc

502.gcc\_r: -m32

-L/home/specdev/new\_compilers/ic2023.2.3/compiler/lib/ia32\_lin

-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)

-fprofile-use=default.profdata(pass 2) -xCORE-AVX2(pass 1)

-flto -Ofast -xCORE-AVX512 -ffast-math -mfpmath=sse

-funroll-loops -qopt-mem-layout-trans=4

-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2024 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R760 (Intel Xeon Platinum 8568Y+)

SPECrate®2017\_int\_base = 905

SPECrate®2017\_int\_peak = 936

CPU2017 License: 6573

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Nov-2023

Hardware Availability: Feb-2024

Software Availability: Dec-2023

## Peak Optimization Flags (Continued)

505.mcf\_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xsapphirerapids -Ofast
-ffast-math -futo -mfpmath=sse -funroll-loops
-qopt-mem-layout-trans=4 -fno-alias
-L/home/specdev/new_compilers/ic2023.2.3/compiler/lib/intel64_lin
-lqkmalloc
```

557.xz\_r: basepeak = yes

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

523.xalancbmk\_r: basepeak = yes

531.deepsjeng\_r: basepeak = yes

541.leela\_r: basepeak = yes

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic2023p2-official-linux64.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-Xeon-v1.6.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2023-11-23 15:04:29-0500.

Report generated on 2024-01-03 16:24:35 by CPU2017 PDF formatter v6716.

Originally published on 2023-12-14.